



# Electrolux

## Vegetable Slicer TRS Vegetable Slicers (TRS22, TRS23, TRS24, TRSU)

ITEM #

MODEL #

NAME #

SIS #

AIA #



### Vegetable Slicer

TRS Vegetable Slicers (TRS22, TRS23, TRS24, TRSU)

<b>603800 (TRS22NU)</b>	TRS22 Vegetable Cutter, single speed, 370 W
<b>603801 (TRS23NU)</b>	TRS23 Vegetable Cutter, single speed, 500 W
<b>603802 (TRS24NU)</b>	TRS24 Vegetable Cutter, single speed, 750 W
<b>603803 (TRSNU)</b>	TRSU Vegetable Cutter, 2 speeds, 750 W

### Short Form Specification

#### Item No.

TRS22, TRS23, TRS24-Vegetable Cutter, heavy duty, 1 speed, designed for high volume dicing requirements, stainless steel base, rear handle, ejector plate, 110-120v/50/60/1 (no discs included)

\* TRSU is 2 speed 208/240V 3ph 60 Hz version.



APPROVAL:

### Main Features

- Suitable for 100-400 meals for table service and up to 800 meals for catering service.
- Vegetable slicer unit has slicing, grating, shredding (julienne) as well as dicing and french fries capabilities.
- Delivered with:
  - All stainless steel vegetable prep attachment with a lever-integrated long vegetable hopper (60mm diameter) and a large round hopper (215cm<sup>2</sup>)
- Ergonomically designed for right and left-handed users, frontal working and to reduce working space around the machine.
- All parts in contact with food are removable without the use of tools, stainless steel hopper, stainless steel lever and cutting chamber are dishwasher safe.
- Hopper easily removed for cleaning.
- Base inclined at 20° to provide easy loading and unloading.
- High discharge zone permits the use of deep containers up to 8" high (20cm).
- Complete and wide selection of blades and grids available, Diameter of blades and grids are 8" (205mm).
- Pulse function for precise cutting.
- Magnetic safety system and motor brake. Prevents machine from running when lever swings away or is open.
- [NOT TRANSLATED]
- Continuous feed model.
- Large round (long vegetable) and large 3/4 moon feed hoppers.
- Red OFF, green ON buttons. (only for 603803)

### Construction

- IP55 flat and waterproof control panel, IP24 throughout the entire machine.
- 1 speed - 340 rpm - for precise cutting, slicing and dicing.
- Compact and portable design.

### Included Accessories

- 1 of TRS & TRK ejector plate (fits with PNC 653772 following PNCs: 603800, 603801, 603802, 603803, 603811, 603812, 603813)

### Optional Accessories

- Julienne Disc 5/32" (4mm) ☐ PNC 650077



Electrolux

TRS Vegetable Slicers (TRS22, TRS23, TRS24, TRSU)

Electrolux Professional, Inc.

[www.electroluxusa.com/professional](http://www.electroluxusa.com/professional)

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401



# Electrolux

## Vegetable Slicer TRS Vegetable Slicers (TRS22, TRS23, TRS24, TRSU)

- Julienne Disc 1/4" (6mm) PNC 650078  
□
- Julienne Disc 5/16" (8mm) PNC 650079  
□
- Julienne Disc 3/8" (10mm) PNC 650080  
□
- Slicing Disc 0.6mm (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650081  
□
- Slicing Disc 1/32" (1mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650082  
□
- Slicing Disc 5/64" (2mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650083  
□
- Slicing Disc 1/8" (3mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650084  
□
- Slicing Disc 5/32" (4mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650085  
□
- Slicing Disc 3/16" (5mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650086  
□
- Slicing Disc 1/4" (6mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650087  
□
- Slicing Disc 5/16" (8mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650088  
□
- Wavy Slicing Disc 5/64" (2mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650089  
□
- Wavy Slicing Disc 1/8" (3mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650090  
□
- Wavy Slicing Disc 1/4" (6mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650091  
□
- Bistrot Pack, Stainless Steel Disc Set containing one each of: C2S 5/64" (2mm) slicing disc, C5S 3/16" (5mm) slicing disc, J2X 5/64" (2mm) grating disc PNC 650092  
□
- Gastronomy Pack, Stainless Steel Disc Set containing one each of: C2S 5/64" (2mm) slicing disc, C5S 3/16" (5mm) slicing disc, J2X 5/64" (2mm) grating disc, AS4X 5/32"x5/32" (4x4mm) shredding disc, C10PS 3/8" (10mm) presser/slicer, MT10T 3/8"x3/8" (10x10mm) dicing grid PNC 650093  
□
- Julienne Disc 5/64" x 5/16" (2 x 8mm) PNC 650158  
□
- Julienne Disc 5/64" x 3/8" (2 x 10mm) PNC 650159  
□
- Slicing Disc 3/8" (10mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650160  
□
- Slicing Disc 15/32" (12mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650161  
□
- Wavy Slicing Disc 5/16" (8mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650162  
□
- Wavy Slicing Disc 3/8" (10mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650164  
□
- Slicing Disc 33/64" (13mm) (can be combined with Dicing Grids (MT) and Grids for Chips (FT)) PNC 650165  
□
- Julienne Disc 5/64" (2mm) PNC 650166  
□
- Julienne Disc 1/8" (3mm) PNC 650167  
□
- Set of 4 Stainless Steel Discs containing one each of: C2S 5/64" (2mm) slicing disc, C5S 3/16" (5mm) slicing disc, J2X 5/64" (2mm) grating disc and J7X 9/32" (7mm) grating disc PNC 650178  
□
- Set of 7 Stainless Steel Discs containing one each of: C2S 5/64" (2mm) slicing disc, C5S 3/16" (5mm) slicing disc, J2X 5/64" (2mm), J7X 9/32" (7mm) grating disc, AS4X 5/32"x5/32" (4x4mm) shredding disc, C10PSB 3/8" (10mm) presser/slicer, MT10T 3/8"x3/8" (10x10mm) dicing grid PNC 650179  
□
- Stainless steel work table assembly. PNC 653283  
□
- Dicing Grid 3/16" x 3/16" (5 x 5mm) (can be combined with Slicing Discs [C] and Wavy Slicing Discs (CW)) PNC 653566  
□
- Dicing Grid 5/16" x 5/16" (8 x 8mm) (can be combined with Slicing Discs [C] and Wavy Slicing Discs (CW)) PNC 653567  
□
- Dicing Grid 3/8" x 3/8" (10 x 10mm) (can be combined with Slicing Discs [C] and Wavy Slicing Discs (CW)) PNC 653568  
□
- Dicing Grid 15/32" x 15/32" (12 x 12mm) (can be combined with Slicing Discs [C] and Wavy Slicing Discs (CW)) PNC 653569  
□
- Dicing Grid 25/32" x 25/32" (20 x 20mm) (can be combined with Slicing Discs [C] and Wavy Slicing Discs (CW)) PNC 653570  
□
- Grid for Chips 1/4" (6mm) (can be combined with Slicing Discs [C] and Wavy Slicing Discs (CW)) PNC 653571  
□
- Grid for Chips 5/16" (8mm) (can be combined with Slicing Discs [C] and Wavy Slicing Discs (CW)) PNC 653572  
□
- Grid for Chips 3/8" (10mm) (can be combined with Slicing Discs [C] and Wavy Slicing Discs (CW)) PNC 653573  
□
- TRS & TRK ejector plate (fits with following PNCs: 603800, 603801, 603802, 603803, 603811, 603812, 603813) PNC 653772  
□
- Grating Disc 5/64" (2mm) PNC 653773  
□
- Grating Disc 1/8" (3mm) PNC 653774  
□




**Electrolux**


**Vegetable Slicer**  
**TRS Vegetable Slicers (TRS22,**  
**TRS23, TRS24, TRSU)**

- Grating Disc 5/32" (4mm) PNC 653775  
□
- Grating Disc 9/32" (7mm) PNC 653776  
□
- Grating Disc 11/32" (9mm) PNC 653777  
□
- Grating Disc for breadcrumbs/  
potatoes PNC 653778  
□
- Grating Disc for parmesan/chocolate PNC 653779  
□

Front




Top

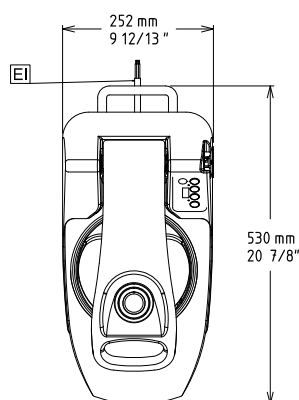

EI = Electrical connection

Side

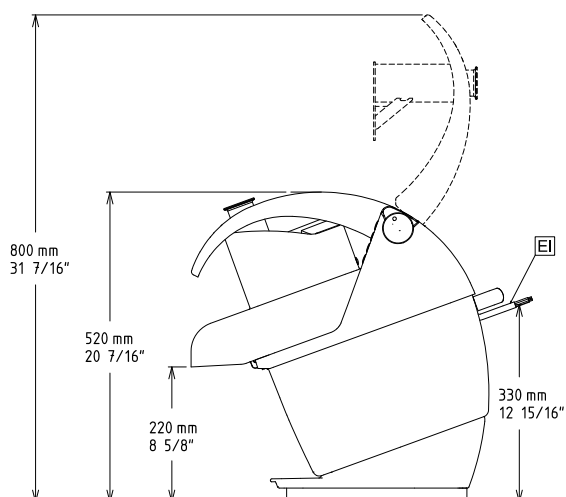

### Electric

#### Supply voltage:

603800 (TRS22NU)	100-120 V/1N ph/50/60 Hz
603801 (TRS23NU)	100-120 V/1N ph/50/60 Hz
603802 (TRS24NU)	100-120 V/1N ph/50/60 Hz
603803 (TRSNU)	208-240 V/3 ph/60 Hz

#### Electrical power, max:

603800 (TRS22NU)	0.37 kW
603801 (TRS23NU)	0.5 kW
603802 (TRS24NU)	0.75 kW
603803 (TRSNU)	0.75 kW

#### Total Watts:

603800 (TRS22NU)	0.37 kW
603801 (TRS23NU)	0.5 kW
603802 (TRS24NU)	0.75 kW
603803 (TRSNU)	0.75 kW

### Key Information:

External dimensions, Width:	9 15/16" (252 mm)
External dimensions, Depth:	19 11/16" (500 mm)
External dimensions, Height:	19 3/4" (502 mm)
Shipping width:	12 13/16" (325 mm)
Shipping depth:	25 " (635 mm)
Shipping height:	23 5/8" (600 mm)
Shipping weight:	
603800 (TRS22NU)	57 lbs (26 kg)
603801 (TRS23NU)	57 lbs (26 kg)
603802 (TRS24NU)	62 lbs (28 kg)
603803 (TRSNU)	57 lbs (26 kg)