Item #_



CHALLENGER SERIES 23" SINGLE OVEN RANGE C23S



Model CHR-4-18



Design Certified by the American Gas Association Design Certified by the Canadian Gas Association Certified by the National Sanitation Foundation

SPECIFY TYPE OF GAS WHEN ORDERING. SPECIFY ALTITUDE WHEN ABOVE 2,000 FT. STANDARD 18" OVEN MODELS:TOTAL INPUT
BTU/HR.CHR-4-184 Open Burners124,000CHR-2-18-FT112 Open Burners/
11" Griddle on Left92,000CHR-0-18-FT220 Open Burners/
22" Griddle40,000

KEY FEATURES:

- ► Stainless steel exterior.
- > 26,000 BTU/hr. open burners with lift-off heads.
- Flashtube pilot ignition system for automatic burner lighting.
- Single piece heavy-duty cast iron top grate measures 11¹/₈"w x 25¹/₂"d. (One grate for every two open burners)
- ► Full width pull out crumb tray.
- 20,000 BTU/hr. standard oven cavity measures 18"w x 22"d x 13"h. Thermostat adjusts from 250° to 500°F.
- One oven rack and four rack positions.
- > ³/₄" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

OPTIONAL FEATURES:

- \geq 4½" stainless steel stub back.
- \triangleright Thermostatically controlled griddle.

ACCESSORIES: Packaged separately

- \triangleright Extra oven rack.
- \triangleright Extra rack guide(s).
- \triangleright Set of four casters (two locking).
- \triangleright Seismic legs.
- > Reinforced highshelf for mounting Cheesemelter.

EXTERIOR DIMENSIONS:

 $22^{1}\!/^{"}w$ x $32^{3}\!/^{"}d$ x $57^{1}\!/^{2}$ h on 6" adjustable legs. 37" working height.

WOLF RANGE COMPANY

Wolf Range Company Division of ITW Food Equipment Group LLC (800) 366-9653 www.wolfrange.com MODEL: CHALLENGER SERIES


23" Single Oven Range



Challenger Series 23" Single Oven Range C23S

TOP OPTIONS:

11" and 22" wide griddle tops in 1" thickness. 20,000 \geq BTU/hr. input per 11" griddle width. Choice of manual or thermostatic controls, one control per burner. Spatula width front grease trough.

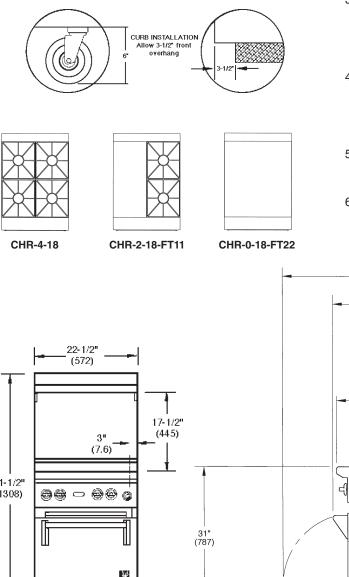


INSTALLATION REQUIREMENTS:

- 1. A pressure regulator sized for this unit is included. Natural gas 5.0" W.C., propane gas 10.0" W.C.
- 2. Gas line connecting to range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be the same as the 3/4" iron pipe.
- 3. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.
- 4. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.

5. Clearances:	Combustible	Non-combustible
Rear	2"	0"
Sides	10"	0"

6. For proper combustion, install equipment on adjustable legs or casters provided with unit. On curb or platform, allow 31/2" front overhang (see adjacent diagram). Leveling bolts are required for curb installation. Specify when ordering.

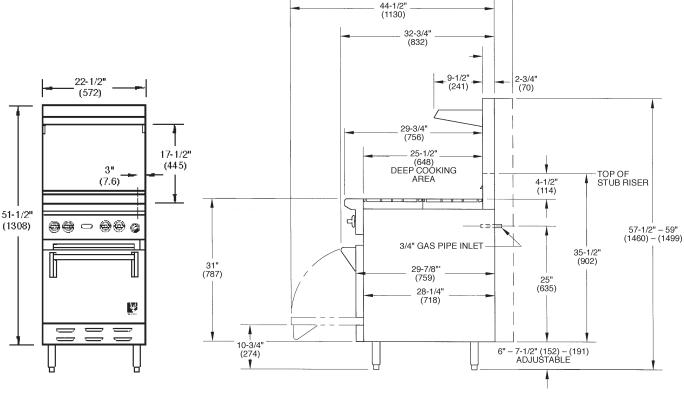

NOTE: In line with its policy to continually improve its product, Wolf Range Company reserves the right to change materials and specifications without notice. This appliance is manufactured for commercial use only and is not intended for home use.