AXIOM®-TWIN-APS

Height: 23.5" Width: 16.0" Depth: 22.2" (59.7cm) (40.6cm) (56.4cm)





- Adjusts automatically to varying water pressure
- Electronic diagnostics and built-in tank drain make service easier
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Ensure coffee quality with programming for brew level, cold brew lock- out and tank temperature, set easily from the front of the machine
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature precision
- Brews directly into 1.9 to 3L airpots
- Energy-saver mode reduces tank temperature during idle periods
- Hot water faucet
- SplashGard® funnels deflect hot liquids away from the hand
- Twin brew head system
- PROP 65 Warning Decal included in packaging with equipment
- · Servers not included unless otherwise noted

Agency:





Specifications

Product #: 38700.0013 Faucet: Upper

Water Access: Plumbed

Finish: Stainless

Funnel: Stainless Steel

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/240	26	6100	No	-	240	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI kPa		kPa	Fitting Supplied	Water Flow Required (GPM)			
	20-90	138-621	3/8" Male Flare Fitting	-			


CAD Drawings

Additional Features

2D	Revit	KLC		
•				

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



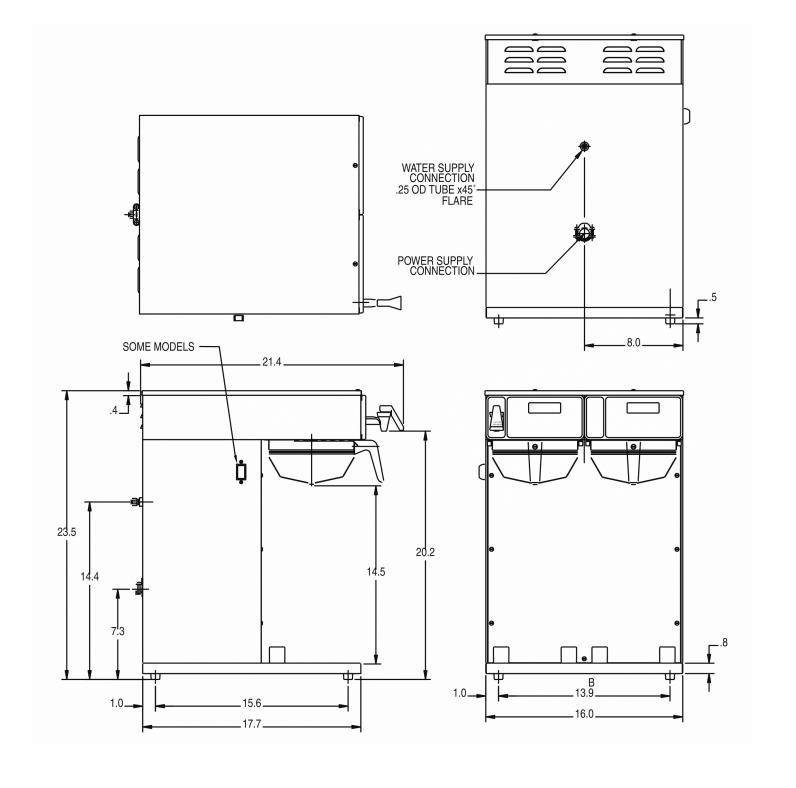

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	23.5 in.	16.0 in.	22.2 in.	28.5 in.	19.9 in.	25.8 in.	52.950 lbs	8.462 ft ³
Metric	59.7 cm	40.6 cm	56.4 cm	72.4 cm	50.5 cm	65.6 cm	24.018 kgs	0.240 m³



Related Products & Accessories: AXIOM®-TWIN-APS(38700.0013)



FILTERS,REGULAR1M 500/2 50/CL

Product #: 20115.0000



HDL(7.62

Product #: 20217.0000



Serving & Holding Options: AXIOM®-TWIN-APS(38700.0013)



AIRPOT, 2.5L GL PB SINGLE PK

Product #:13041.0001



AIRPOT, 2.5L GL PB 6/ CASE

Product #:13041.0101



AIRPOT, 2.2L GL PB SINGLE PK

Product #:28696.0002



AIRPOT, 2.2L GL PB 6/ CASE

Product #:28696.0006



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 2.5L SST LA 6/ CASE

Product #:32125.0100



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



AIRPOT, 3.0L SST LA 6/ CASE

Product #:32130.0100



AIRPOT, 2.2L GL LA 6/ CASE

Product #:32700.0000



AIRPOT, 3.8L SST LA SINGLE PK

Product #:36725.0000



CASE

Product #:36725.0100



SINGLE PK

Product #:44311.0000

