JDF®-2S

Height: 33.4" Width: 10.5" Depth: 27.0" (84.8cm) (26.7cm) (68.6cm)



- Patented High Intensity Mixing System delivers consistent quality beverages in the cup - cup after cup, from the top of the cup to the bottom of the cup
- Quick dispense with 1.0 to 1.5oz (29.6 to 44.4mL) per second flow rate
- 7" (17.8cm) cup clearance accommodates most juice containers
- Both push and hold dispense and optional single size portion control dispense available in the same dispenser
- One dispenser delivers both frozen and ambient concentrate products to maximize profitability by providing greater flexibility in product offerings
- · Service friendly design makes set up and maintenance simple
- Burst Capacity: At rate of one 12 oz drink/min, 70 drinks before exceeding 41°F (75°F ambient and 75°F incoming water temp)
- Pumps and Mixes most 2+1 to 11+1 concentrates accurately and consistently, including 4+1 and 5+1 high viscosity concentrates

Agency:





Specifications

Product #: 37900.0001 **Door:** Un-Lit

Flavors: 2 Flavors Refrigerant: R-134A

Water Access: Plumbed Ice Bank: 8.00 lbs (3.629 kgs)

Finish: Black Dispense: Push Button

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	4.5	540	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	
20-100	138-689	3/8" Male Flare Fitting	-	


CAD Drawings


Additional Features


2D	Revit	KLC
•		


MARNING:





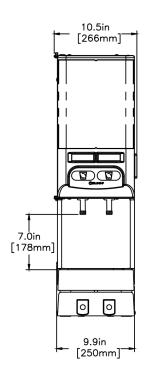

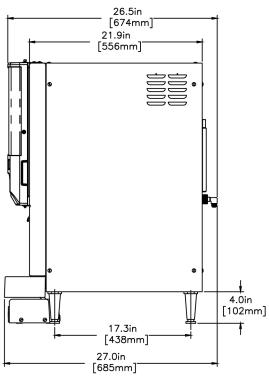

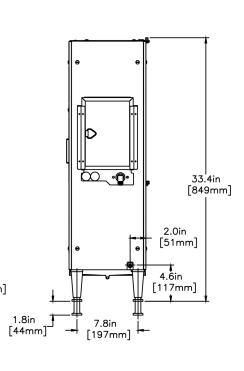

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	33.4 in.	10.5 in.	27.0 in.	43.7 in.	22.8 in.	30.5 in.	113.710 lbs	17.543 ft ³	
Metric	84.8 cm	26.7 cm	68.6 cm	111.0 cm	57.8 cm	77.5 cm	51.579 kgs	0.497 m³	



Related Products & Accessories: JDF®-2S(37900.0001)



WIRE GRILL,DRIP TRAY (SINGLE)

Product #: 26801.0000

KIT, AMBIENT CONC CVRSN JDF-4

Product #: 33699.00012



WATER FILTER, EQHP-10

Product #: 39000.00043



CONTAINER ASSY, REFILLABLE

Product #: 39302.0000²

KIT, HOSE ASSY-PUMP JDF-2S/4S

Product #: 39690.00002



TRAY ASSY, EXTENDED

Product #: 44015.1000



SYSTEM, WQ-55(2)5

Product #: 56000.00041



SYSTEM, WEQ-10(1.5)5

Product #: 56000.00271



CARTRIDGE, WQ-55(2)5

Product #: 56000.01041



CARTRIDGE, WEQ-10 (1.5)5

Product #: 56000.01221

1NSF Certified 2NSF Certified with spec sheet model listed 3NSF Certified under Solventum Purification 4NSF Certified under Mavea LLC 5NSF Certified under Zojirushi 6NSF Certified under Qins Inc 7NSF COMPONENT Certified



Serving & Holding Options: JDF®-2S(37900.0001)
Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



