



Energy
MIZER

GW-100


Chemical Sanitizing
Undercounter
Glasswasher




**This NEW 120V
Glasswasher requires
only 20 AMP service.**

FEATURES:

- Cleans and sanitizes up to 1000 2-1/2" glasses per hour.
- Hands-free glass activated on/off stop is safe and convenient.
- Independent upper and lower wash and rinse arms ensure superior results.
- 120V with built-in 1.25kW electric tank heater maintains the recirculated wash water to the recommended 140°F wash temperature.
- Compatible with both Iodine and Chlorine Sanitizers.
- Simple controls for operation and cleaning.
- All stainless steel construction assures trouble free service and a long life.
- Adjustable rinse temperature allows flexible sanitizing options.
- Poly Pro™ circular conveyor is extremely durable and reduces chipping and breakage of glassware.
- Double wall construction for quiet back bar operation.
- Internal chemical storage.
- Built-in chemical pumps with primer switches.

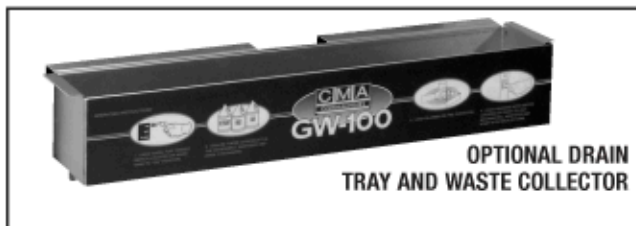

OPTIONAL DRAIN
TRAY AND WASTE COLLECTOR



Stainless steel wash/rinse chamber.



Independent spray arms blast water from the top and bottom for optimum cleaning, sanitizing and rinsing.






GW-100

Chemical Sanitizing
Undercounter
Glasswasher

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

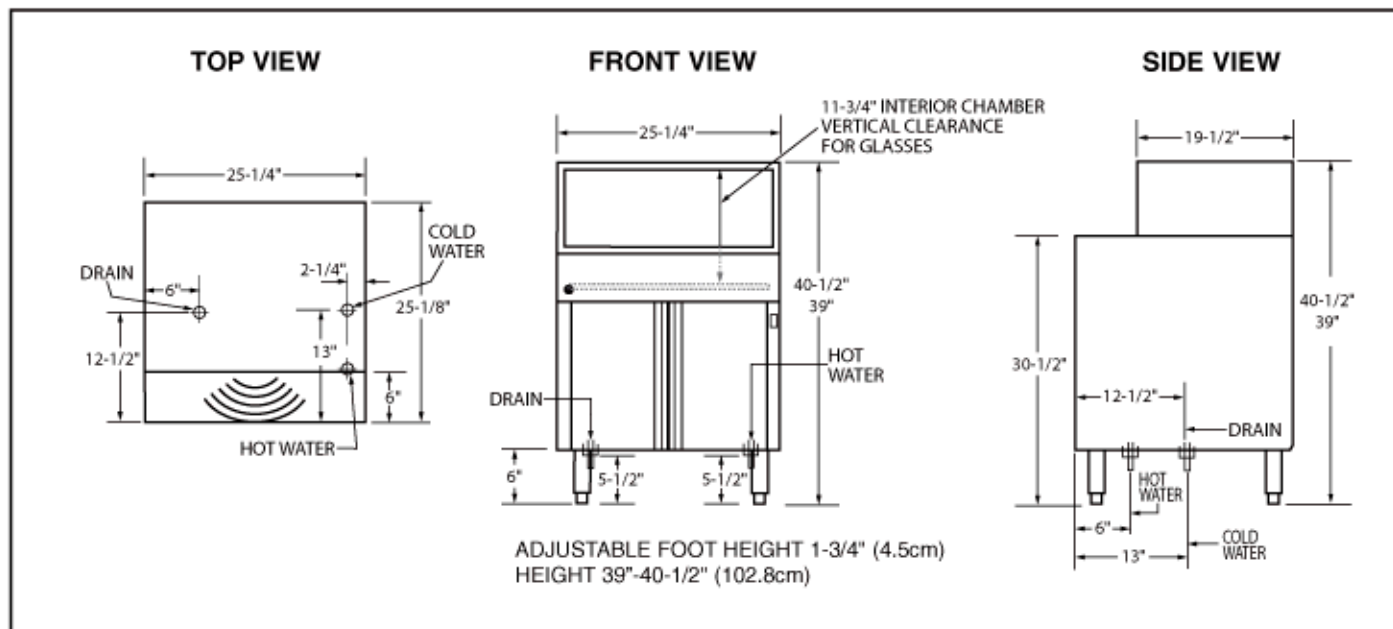

Specifications:

MODEL GW-100	USA	METRIC		USA	METRIC
OPERATING CAPACITY (2-1/2") GLASSES PER HOUR	1000	-	DIMENSIONS		
OPERATING TEMPERATURES			DEPTH	25-1/8"	(63.8cm)
INLET WATER, (HOT) RECOMMENDED	140°F	(60°C)	WIDTH	25-1/4"	(64.1cm)
INLET WATER, (COLD)	75°F	(24°C)	HEIGHT	39"-40-1/2"	(99-102.8cm)
WATER CONSUMPTION			MAXIMUM CLEARANCE FOR GLASSWARE	11-3/4"	(29.84cm)
HOT WATER (INITIAL FILL)	3 GAL	(11.25 L)	ELECTRICAL RATING	VOLTS	AMPS
HOT WATER PER HOUR (MAX)	12 GAL	(45.42 L)		120/60/1	11
COLD WATER PER MINUTE (APPROX)	2.8 GPM	(10.6 LPM)	TANK HEATER	1.25kW	
WATER REQUIREMENTS			SHIPPING WEIGHT	156#	(71kg)
HOT WATER INLET	1/2"	-	APPROXIMATE		
COLD WATER INLET	1/2"	-			
DRAIN (MAX)	1-1/2"	-			

Summary Specifications: Model GW-100

The GW-100 glasswasher is designed to produce sparkling clean glassware utilizing separate detergent, sanitizer and rinse aid chemical pumps. Standard features include upper and lower wash/rinse arms, wash tank heater, Poly Pro™ conveyor, splash curtains, double-walled construction, and storage space for three 1-gallon containers. The GW-100 is constructed for extended life out of stainless steel.

Available Options

- Drain tray and waste collector.

