



### PCVG-1-CAT

Single Deck, Standard Depth  
Shown with Catering  
Package.

#### MODEL NUMBERS

PCVG-1    PCVCG-1  
PCVDG-1    PCVDCG-1



- Updated door handles

### PCVG-1

Single Deck, Standard Depth  
Shown with Manual Controls and optional casters



## CONVECTION OVEN FEATURES

- One hand opens and closes both doors simultaneously
- 60/40 doors swing open to 130°
- Large window
- Two interior lights
- Digital electronic controls
- Stainless steel exterior
- Rugged ½ HP 2 speed motor per oven
- Porcelainized oven interior for easy cleaning and better browning
- Five oven racks with 10 rack positions
- Most spacious oven interior available
- Curved corners for easy cleaning.

### PROGRAMMABLE CONTROLS WITH COOK 'N HOLD FEATURE

- Easy-to-program. Simply select the time, temperature, fan settings and hold mode, then preset buttons.
- Cook 'n Hold feature. Cooks at a higher temperature for browning. Automatically switches to a lower holding temperature.
- 24 hr. digital countdown timer with easy-to-read LED digital display.
- Cooking versatility.
- Fan option lets you choose modes:
  1. Fan on continuously
  2. Fan on when heat is on pulsed fan feature.
- °F or °C readings can be displayed.

### MANUAL CONTROLS


- Independent time and temperature controls give you maximum versatility for general baking and roasting.
- 2-speed fan switch controls bake or roast.

### THERMOSTATIC OVEN CONTROL

- Snap action temperature control 150° F to 500° F. (66° C to 260° C).

### ON - OFF SWITCH

- 60 minute manual timer.
- Audible buzzer lets you know when the cooking cycle is complete.

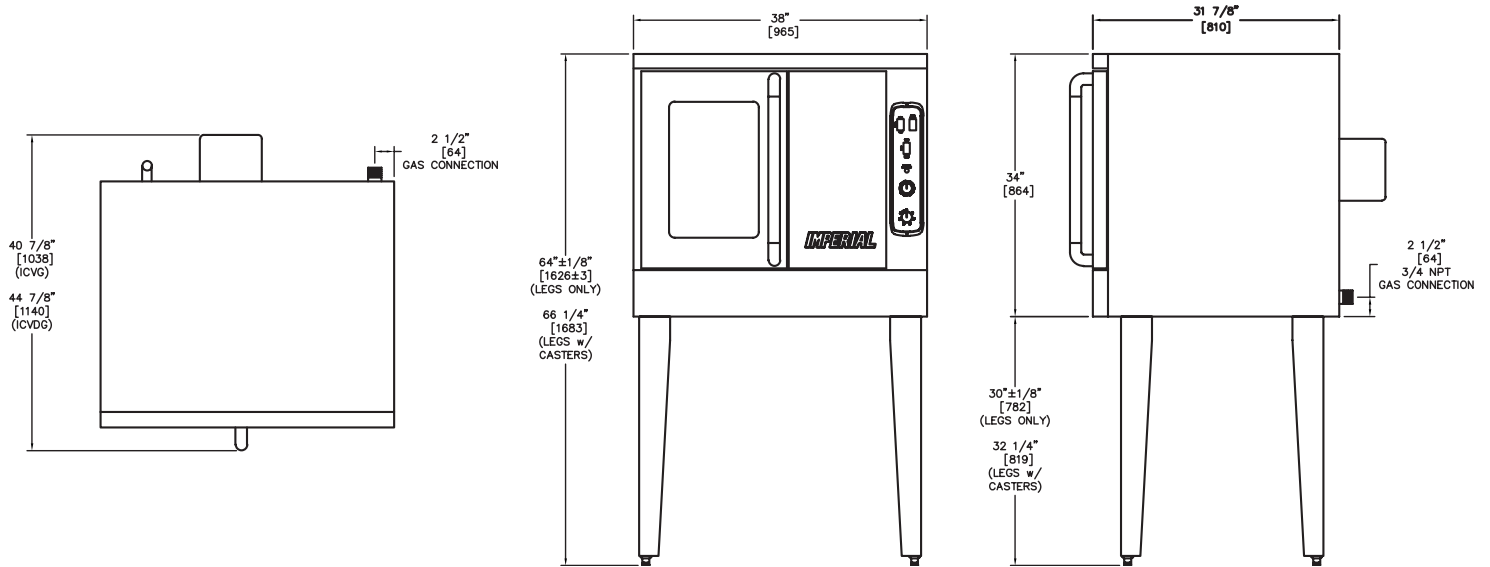

### GAS CONVECTION OVENS

MODEL	DESCRIPTION	GAS OUTPUT BTU	GAS OUTPUT KW	SHIP WEIGHT KG	SHIP WEIGHT LBS
PCVG-1	SINGLE DECK, STANDARD DEPTH	70,000	21	236	521
PCVDG-1	SINGLE DECK, BAKERY DEPTH	80,000	23	277	611
PCVGCG-1	SINGLE DECK, STANDARD DEPTH CATERING STYLE	70,000	21	254	561
PCVDGCG-1	SINGLE DECK, BAKERY DEPTH CATERING STYLE	80,000	23	295	651

MODEL	DIMENSIONS	CRATED DIMENSIONS
PCVG-1	38" W X 41-1/2" D X 64" H (965 X 1054 X 1524 MM)	40" X 47-1/2" X 38-1/2" (1016 X 1206 X 978 MM)
PCVDG-1	38" W X 45-1/2" D X 64" H (965 X 1156 X 1524 MM)	40" X 51-1/2" X 38-1/2" (1016 X 1308 X 978 MM)
PCVGCG-1	38" W X 41-1/2" D X 64" H (965 X 1054 X 1524 MM)	40" X 47-1/2" X 38-1/2" (1016 X 1206 X 978 MM)
PCVDGCG-1	38" W X 45-1/2" D X 64" H (965 X 1156 X 1524 MM)	40" X 51-1/2" X 38-1/2" (1016 X 1308 X 978 MM)

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)

### UTILITY REQUIREMENTS GAS MODELS

VOLTAGE	PHASE	HZ	AMPS MAX
120	1	60/50	9

### EXTERIOR

- Stainless steel exterior, except back. Reflects a quality, professional look for exhibition cooking
- Welded and finished seams
- Stainless steel legs
- Easy to clean and maintain
- One year parts and labor warranty

### OPTIONS AND ACCESSORIES

- Cook and Hold computer controls
- Stainless steel back enclosure
- Direct connect vent
- Heavy duty casters, set of 4
- Stack kit with 6" (152) stainless steel legs
- Stainless steel solid doors
- Stainless steel bottom shelf and adjustable rack supports
- Stainless steel bottom shelf only for stand

### CLEARANCE

For use only on non-combustible floors with legs or casters; or 2 1/4" (57 mm) overhang is required when curb mounted. 0" clearance from non-combustible side and rear walls. Provide 6" (152 mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.



## PCVG-2

Shown with optional casters.

### MODEL NUMBERS

PCVG-2  
PCVDG-2

## CONVECTION OVEN FEATURES

- One hand opens and closes both doors simultaneously
- 60/40 doors swing open to 130°
- Large window
- Two interior lights
- Digital electronic controls
- Stainless steel exterior
- Rugged ½ HP 2 speed motor per oven
- Porcelainized oven interior for easy cleaning and better browning
- Five oven racks with 10 rack positions
- Most spacious oven interior available
- Curved corners for easy cleaning.

### PROGRAMMABLE CONTROLS WITH COOK 'N HOLD FEATURE

- Easy-to-program. Simply select the time, temperature, fan settings and hold mode, then preset buttons.
- Cook 'n Hold feature. Cooks at a higher temperature for browning. Automatically switches to a lower holding temperature.
- 24 hr. digital countdown timer with easy-to-read LED digital display.
- Cooking versatility.
- Fan option lets you choose modes:
  1. Fan on continuously
  2. Fan on when heat is on pulsed fan feature.
- °F or °C readings can be displayed.

### MANUAL CONTROLS

- Independent time and temperature controls give you maximum versatility for general baking and roasting.
- 2-speed fan switch controls bake or roast.

### THERMOSTATIC OVEN CONTROL

- Snap action temperature control 150° F to 500° F. (66° C to 260° C).

### ON - OFF SWITCH

- 60 minute manual timer.
- Audible buzzer lets you know when the cooking cycle is complete.




- Updated door handles



# GAS

## CONVECTION OVENS

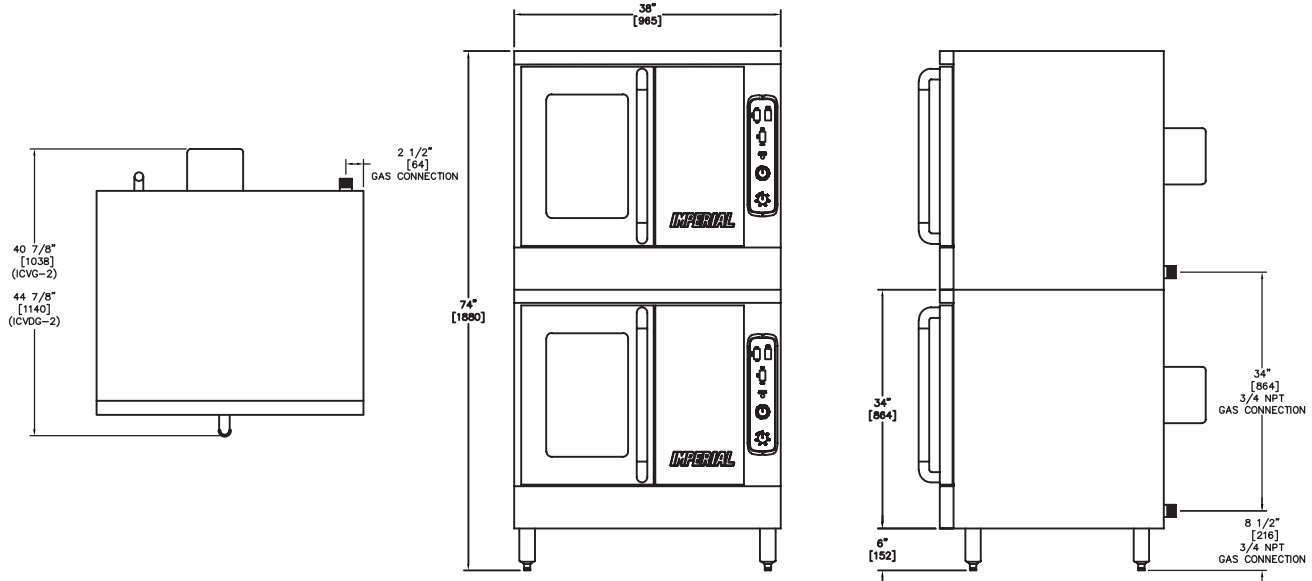

### GAS CONVECTION OVENS

MODEL	DESCRIPTION	GAS OUTPUT BTU	GAS OUTPUT KW	SHIP WEIGHT KG	SHIP WEIGHT LBS
PCVG-2	DOUBLE DECK, STANDARD DEPTH	140,000	41	455	1,005
PCVDG-2	DOUBLE DECK, BAKERY DEPTH	160,000	47	536	1,185

MODEL	DIMENSIONS	CRATED DIMENSIONS
PCVG-2	38" W X 41-1/2" D X 74" H (965 X 1054 X 1880 MM)	40" X 47-1/2" X 72" (1016 X 1206 X 1829 MM)
PCVDG-2	38" W X 45-1/2" D X 74" H (965 X 1156 X 1880 MM)	40" X 51-1/2" X 72" (1016 X 1308 X 1829 MM)

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)

### UTILITY REQUIREMENTS GAS MODELS

VOLTAGE	PHASE	HZ	AMPS MAX
120	1	60/50	9

### EXTERIOR

- Stainless steel exterior, except back. Reflects a quality, professional look for exhibition cooking
- Welded and finished seams
- Stainless steel legs
- Easy to clean and maintain
- One year parts and labor warranty

### OPTIONS AND ACCESSORIES

- Cook and Hold computer controls
- Stainless steel back enclosure
- Direct connect vent
- Heavy duty casters, set of 4
- Stack kit with 6" (152) stainless steel legs
- One point gas connection for double stack ovens
- Stainless steel solid doors

### CLEARANCE

For use only on non-combustible floors with legs or casters; or 2¼" (57 mm) overhang is required when curb mounted. 0" clearance from non-combustible side and rear walls. Provide 6" (152 mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.

