

JET-TECH

model 737

High-temp undercounter
deluxe dishwasher




- Fully automatic program with wash phase at 150°F (65°C.) and final rinse phase at 185°F. (85°C.)
- Capacity: 30 racks per hour
- Sanitary labyrinth door eliminates need for gasket
- Built-in booster for superior sanitation
- Built-in rinse-additive pump for sparkling results
- Built-in automatic detergent pump for consistent results
- Built-in automatic drain pump for ease of installation

OPTIONAL ACCESSORIES

- Pressure reducing valve (PRV) kit
- Stainless steel stand (12" high)

model 737

High-temp undercounter deluxe dishwasher

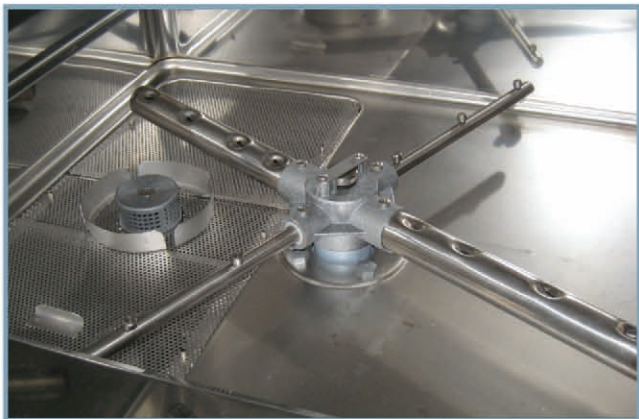

STAINLESS STEEL WASH AND RINSE ARMS



SLIDE OUT INTEGRATED CONTROL PANEL

CONSTRUCTION FEATURES


- Body, external housing, wash tank, and all chassis components in brushed stainless steel AISI 304 18/8
- Noise 58 DbA due to utilization of double-wall insulated panels
- Upper and lower wash and rinse jets on revolving arms constructed of stainless steel; easy to remove and clean without the need for tools
- Integrated AISI 304 18/10 stainless steel booster with insulated lining
- Safety micro-switch on the door to interrupt wash pump action
- Independently-operated heating elements alternating between booster and wash tank
- Alternating heating resistors reducing maximum absorption thereby reducing energy costs
- Possibility of built-in or free-standing installation
- Standard insulated top and side panels
- Deep drawn inner chamber constructed without welds or corners and recessed wash tank make the 737 ideally suited for Marine usage
- Wash pump protected with double filters, plus additional filter for overflow tube
- Door-opening with overall clearance of 14.25 in. (36 cm)
- Automatic fill and water level regulation of tank
- Slide out integrated front control panel provides easy access for service
- Individual digital thermometer gauges displaying wash and rinse temperatures
- Standard equipment includes:
One open combination rack and one peg dish rack
19.75" x 19.75" (500 mm x 500 mm)



ANSI/NSF-3

TECHNICAL FEATURES

- **Rack capacity:** 19.75" x 19.75" (500 mm x 500 mm)
- **Complete cycle:** 120 seconds (105 sec. wash & 15 sec. rinse)
- **Wash tank capacity:** 3.17 U.S. gallons (12 liters)
- **Wash tank element:** 2800 Watts
- **Wash temperature:** 150°F. (65°C.)
- **Booster capacity:** 1.72 U.S. gallons (6.5 liters)
- **Booster element:** 4000 Watts
- **Booster (water) temperature:** 185°F. - 194°F. (85°C. - 90°C.)
- **Power supply:** 208-240/60/1 22.3 Amps
- **Motor-pump:** 0.75 H.P. with clipson at 320F. (160C.)
- **Maximum power ratings:** 4550 Watts
- **Water consumption per cycle:** 0.79 U.S. gallon (3 liters)
- **Water consumption/hr:** 26.9 U.S. Gallons / 102.0 Liters maximum
- **Water supply:** 1/2" hot water supply 140°F/60°C
- **Flow pressure:** 25 p.s.i. (dynamic) (PRV may be required)
- **Water inlet connection:** 3/4" male hose connector (hose included)
- **Drain connection:** 1" ID (25.4mm) max. height 36"/915mm (hose included)
- **Shipping weight:** 165 lbs. (75 kg.)

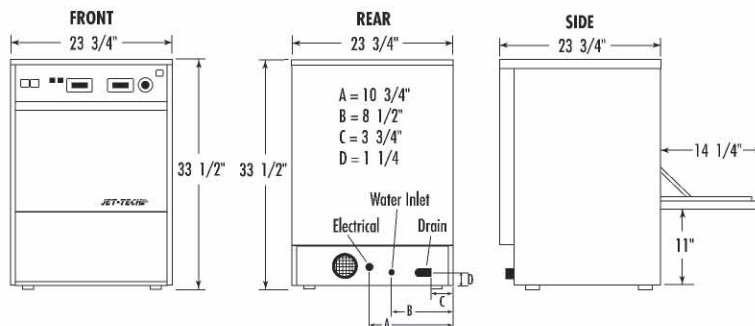

MVP GROUP CORPORATION

HEAD OFFICE: 5659 Royalmount Ave., Montreal, QC, Canada H4P 2P9

TEL: (514) 737-9701 • TOLL FREE: (888) 275-4538 • FAX: (514) 342-3854 • TOLL FREE FAX: (877) 453-8832

www.mvpgroupcorp.com • e-mail: sales@mvpgroupcorp.com

In line with our continuing policy on research and product development, we reserve the right to alter specifications and prices without notice.