

Vent Hood®

SPECIFICATION SHEETS

SUBJECT TO CHANGE WITHOUT NOTICE


Vent Hood®

UNDER CABINET


SUBJECT TO CHANGE WITHOUT NOTICE

Vent-A-Hood® UNDER CABINET RANGE HOOD SPECIFICATIONS



PRH6-K Halogen lights only. This model not available with heat lamps. This model only available in Black, Biscuit, Gunsmoke, Stainless Steel, or White. Custom sizes not available.

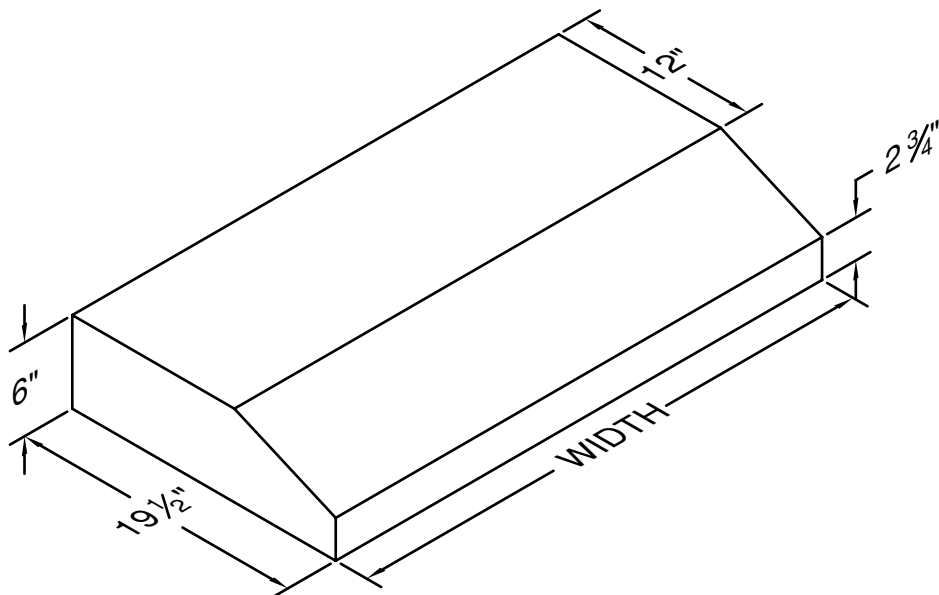


The VP521 transition is available for top vent applications at an additional charge.

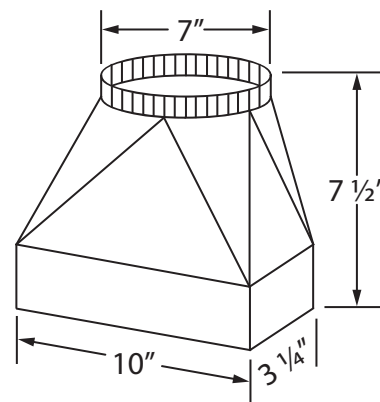

Connection Diagrams (24", 30", 36", & 42" Widths)

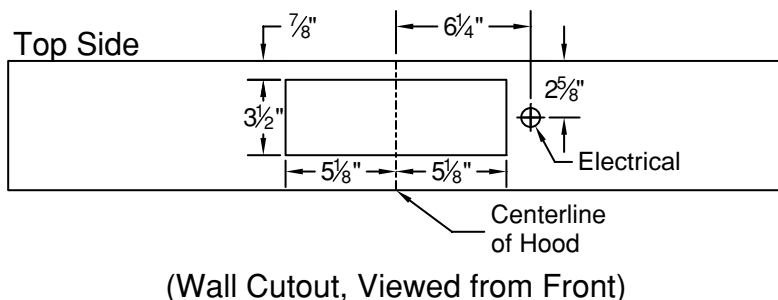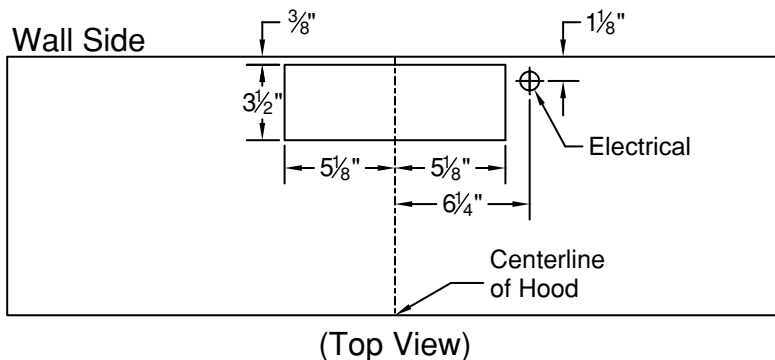

Recommended Mounting Height*

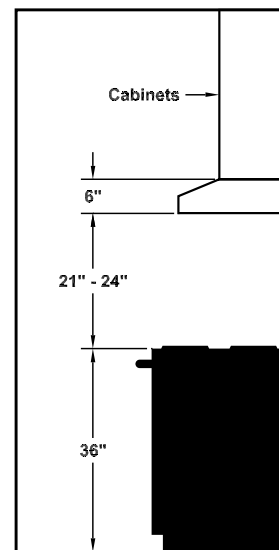

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones [#]
K250 (Top Vent)	115	3.2	60	1550	250	375	223	220	190	7" (38 in. ²)	7.4
K250 (Back Vent)	115	3.2	60	1550	220	330	215	195	180	7" (38 in. ²)	7.4

All K-Series hoods have two halogen lights.

* Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 1109A




Vent-A-Hood® UNDER CABINET RANGE HOOD SPECIFICATIONS



SLH6-K Halogen lights only. This model not available with heat lamps. This model only available in Black, Biscuit, Gunsmoke, Stainless Steel, or White. Custom sizes not available.

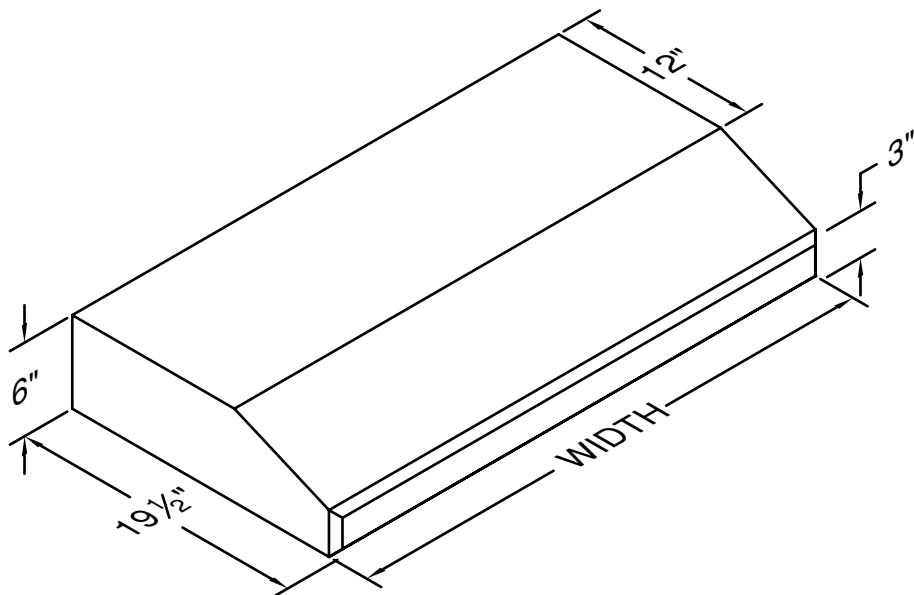


The VP521 transition is available for top vent applications at an additional charge.

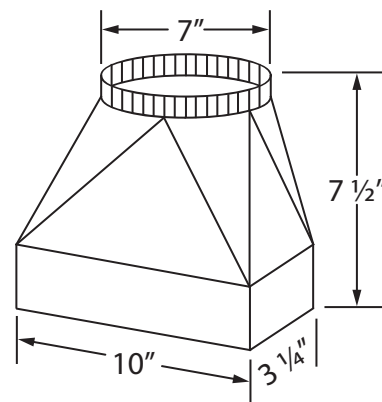

Connection Diagrams (24", 30", 36", & 42" Widths)

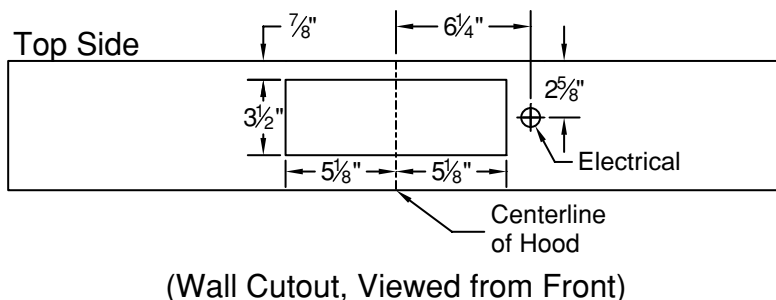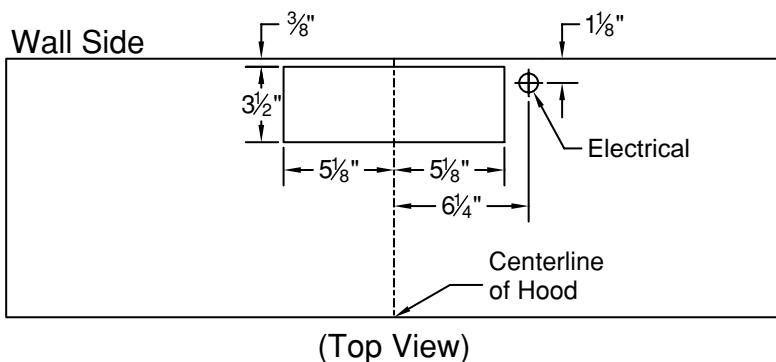

Recommended Mounting Height*

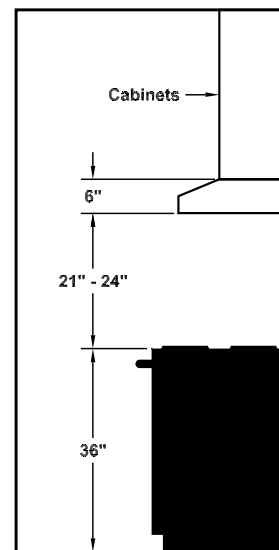

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones [#]
K250 (Top Vent)	115	3.2	60	1550	250	375	223	220	190	7" (38 in. ²)	7.4
K250 (Back Vent)	115	3.2	60	1550	220	330	215	195	180	7" (38 in. ²)	7.4

All K-Series hoods have two halogen lights.

* Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 1109A




Vent-A-Hood® UNDER CABINET RANGE HOOD SPECIFICATIONS


NP9/NPH9/PR9/PRH9/SL9/SLH9 "H" in part number indicates halogen lighting. WL-1 warming lights are available on selected models.

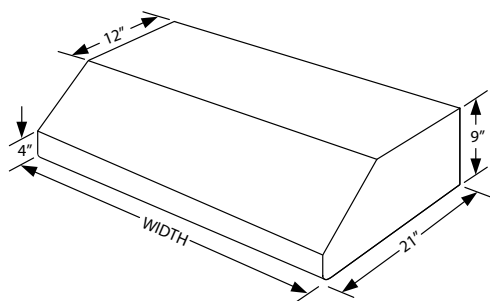

NP9/NPH9

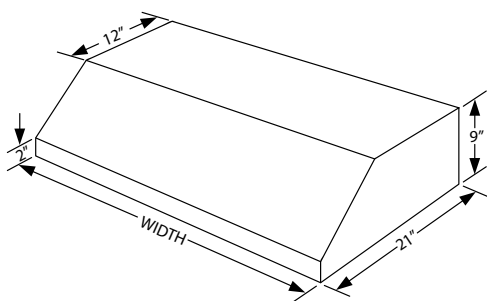


PR9/PRH9

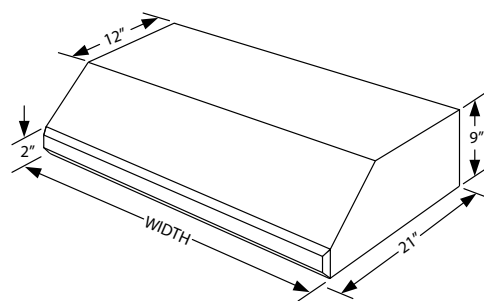


SL9/SLH9

Connection Diagram (30" - 48" Widths)

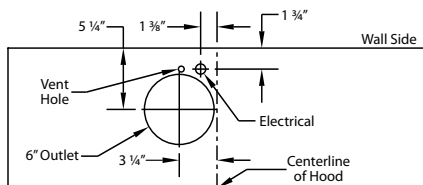


**300 CFM B100 Single Blower
(Top View)**

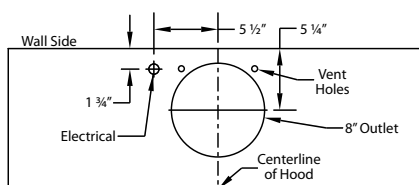


**600 CFM B200 Dual Blower
(Top View)**

Recommended Mounting Height*

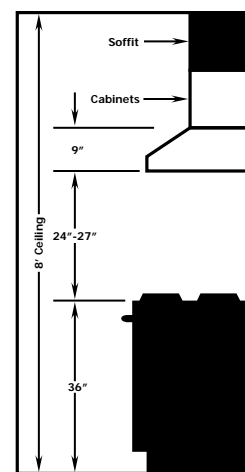


*Exceeding recommended mounting height may compromise performance.

Connection Diagram (42" - 48" Widths)

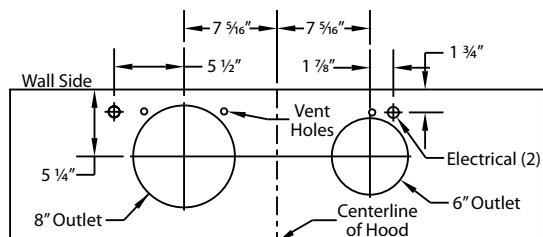


**900 CFM B200 Dual & B100 Single Blower
(Top View)**

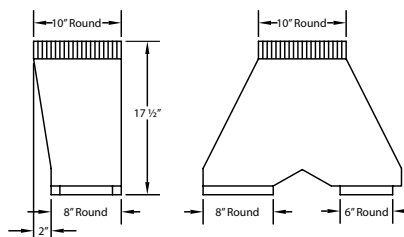


**VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)**


Connection Diagram (48" Width)

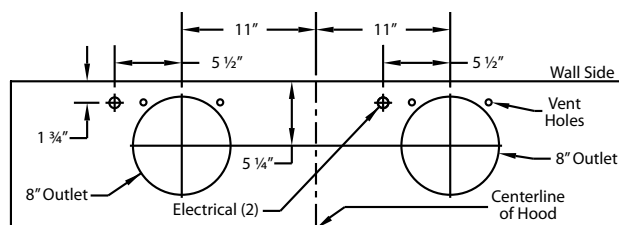

**1200 CFM Double B200 Dual Blowers
(Top View)**

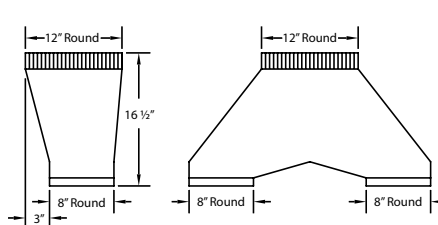

**VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)**

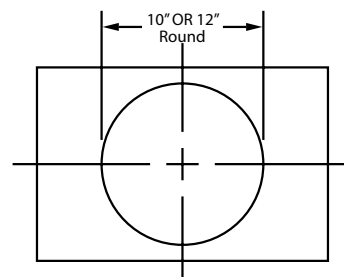

**VP562/VP563
transition
centers outlet
over top of hood**

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6

* Add 2.5 amp for each warming light and 0.5 amp for each halogen light. Hoods are available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").
 # Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808A




Vent-A-Hood® UNDER CABINET RANGE HOOD SPECIFICATIONS

F/XR9/XRH9 "H" in part number indicates halogen lighting. WL-1 warming lights are available on selected models.

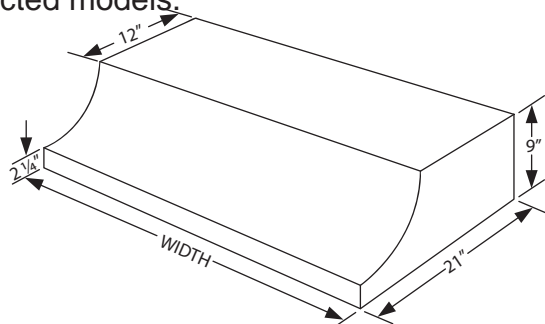


F (Fluorescent Lights Only)

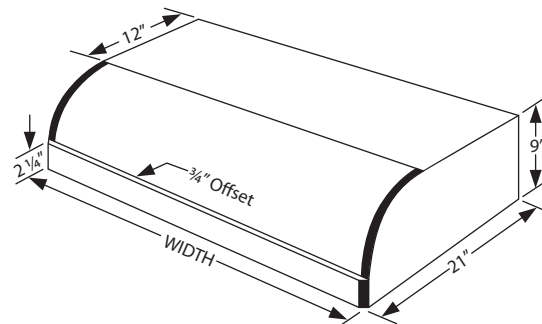


XR9/XRH9

Connection Diagram (30" - 48" Widths)

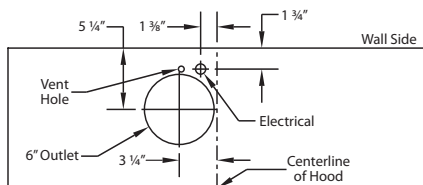


**300 CFM B100 Single Blower
(Top View)**

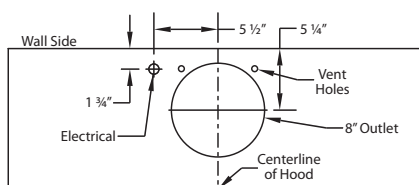


**600 CFM B200 Dual Blower
(Top View)**

Connection Diagram (42" - 48" Widths)

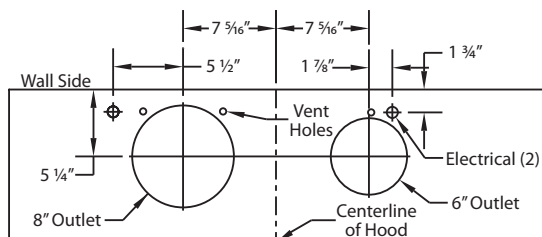


**900 CFM B200 Dual & B100 Single Blower
(Top View)**

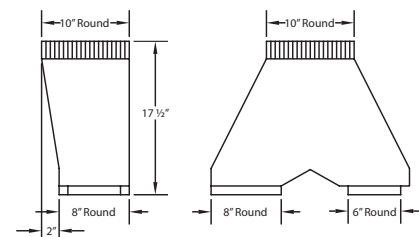


**VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)**


Connection Diagram (48" Width)

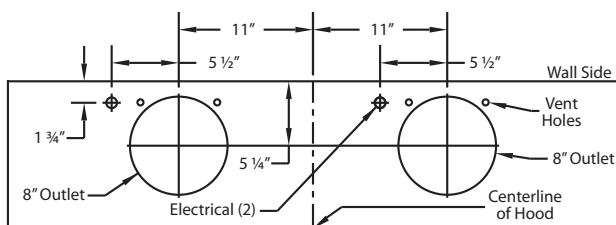

**1200 CFM Double B200 Dual Blowers
(Top View)**

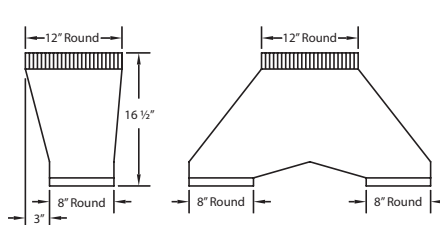


**VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)**

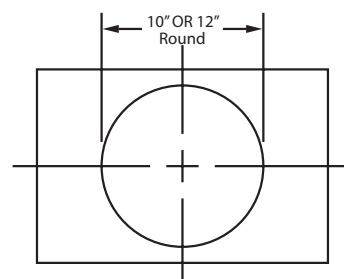

**VP562/VP563
transition
centers outlet
over top of hood**

Recommended Mounting Height*

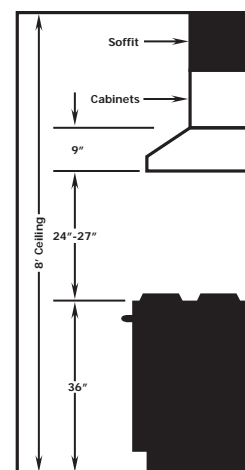

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in.)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in.)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in.)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in.)	6.6

* Add 2.5 amp for each warming light and 0.5 amp for each halogen light. The F hood is available with fluorescent lights only (one per single or dual blower) and the XR9/XRH9 is available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").



Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A


Vent-A-Hood® UNDER CABINET RANGE HOOD SPECIFICATIONS

SL6/SLH6 "H" in part number indicates halogen lighting. WL-1 warming lights are available on selected models.

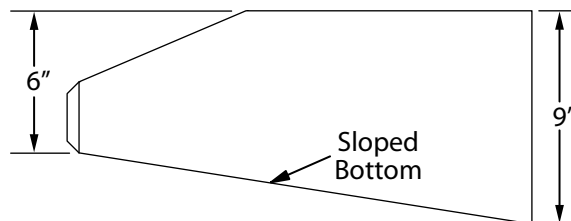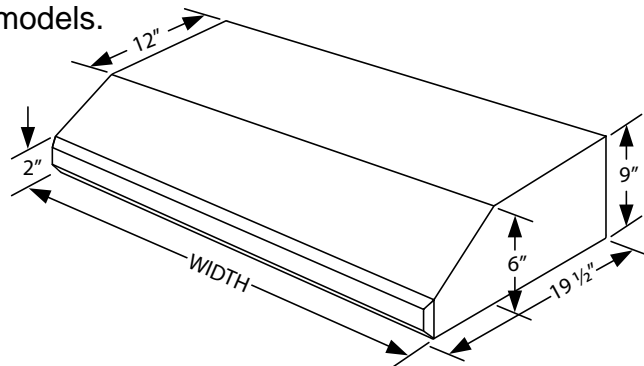


SL6/SLH6

Connection Diagram (30" - 48" Widths)

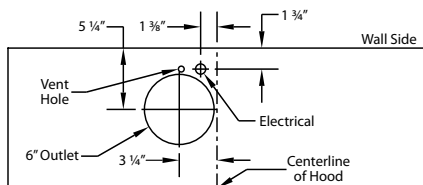


**300 CFM B100 Single Blower
(Top View)**

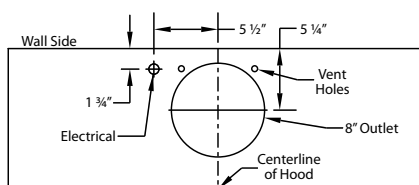


**600 CFM B200 Dual Blower
(Top View)**

Recommended Mounting Height*

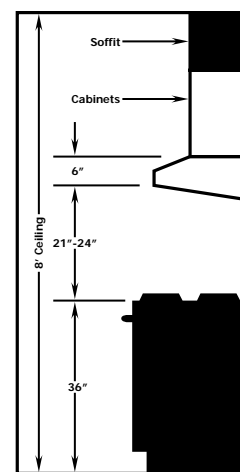


*Exceeding recommended mounting height may compromise performance.

Connection Diagram (42" - 48" Widths)

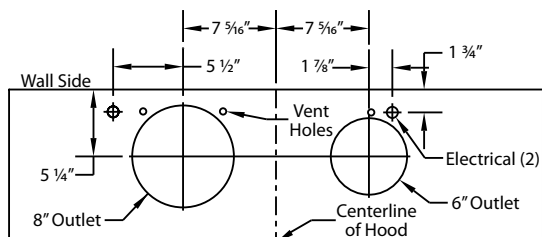


**900 CFM B200 Dual & B100 Single Blower
(Top View)**

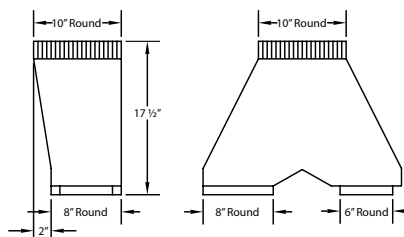


**VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)**


Connection Diagram (48" Width)

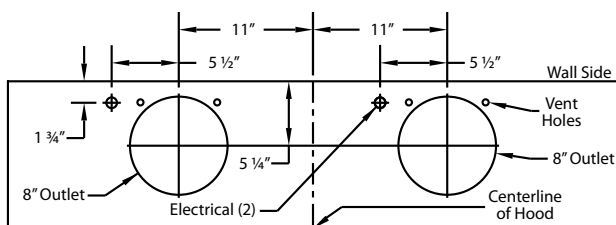

**1200 CFM Double B200 Dual Blowers
(Top View)**

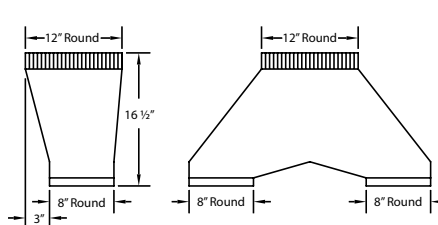

**VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)**

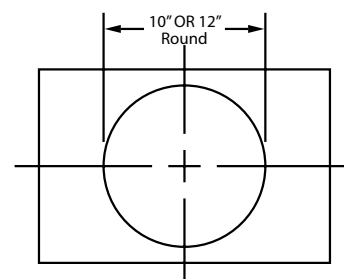

**VP562/VP563
transition
centers outlet
over top of hood**

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6

* Add 2.5 amp for each warming light and 0.5 amp for each halogen light. Hood is available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").
 # Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".
 # Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808A

Vent-A-Hood®


WALL MOUNT

SUBJECT TO CHANGE WITHOUT NOTICE


VentA Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS

NP18/NPH18/NPX18/NPXH18/PR18/PRH18/PRX18/PRXH18/SL18/SLH18/SLX18/SLXH18


"H" in part number indicates halogen lighting. WBAR warming light bar is available on selected models (included on NP Series). X in part number indicates 27" depth.

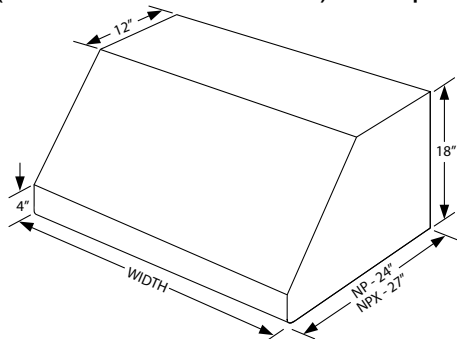

NP(X)18/NP(X)H18
(Includes WBAR warming light bar)

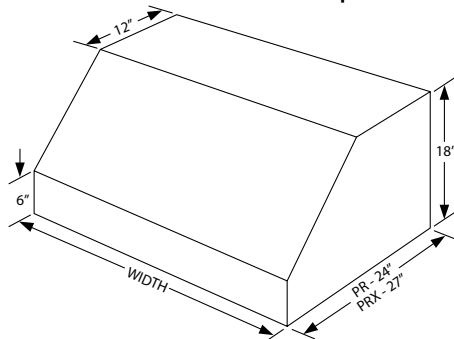


PR(X)18/PR(X)H18

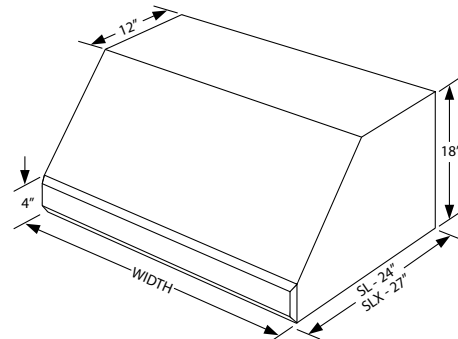


SL(X)18/SL(X)H18

Connection Diagrams (30" - 48" Widths)

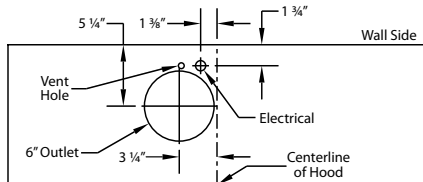


300 CFM B100 Single Blower
(Top View)

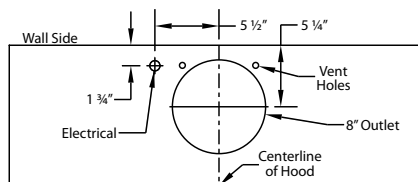


600 CFM B200 Dual Blower
(Top View)

Connection Diagram (42" - 60" Widths)

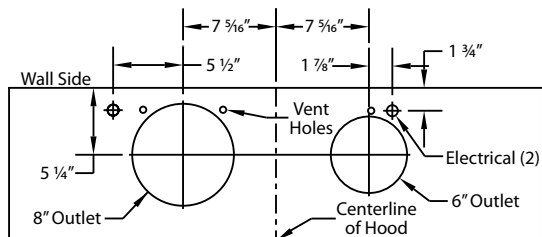


900 CFM B200 Dual & B100 Single Blower
(Top View)

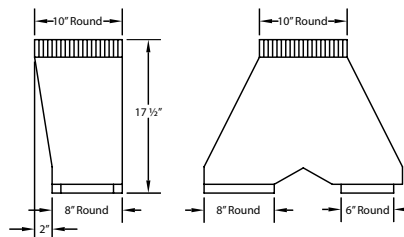


VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)

Recommended Mounting Height*

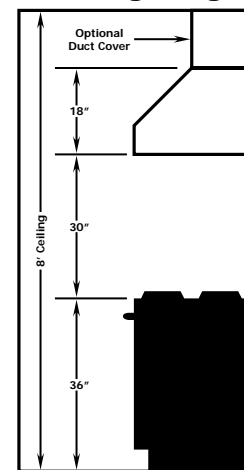


*Exceeding recommended mounting height may compromise performance.


Connection Diagram (48" - 66" Widths)

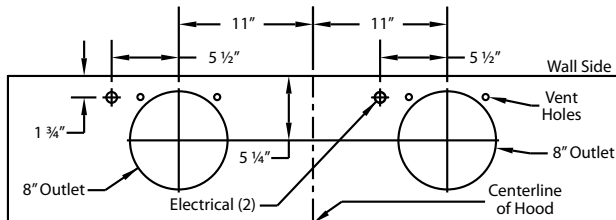

1200 CFM Double B200 Dual Blowers
(Top View)

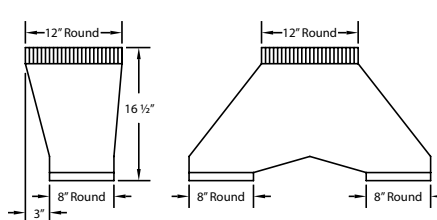

VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)

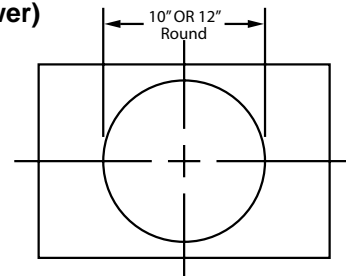

VP562/VP563
transition
centers outlet
over top of hood

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6

* Add 2.5 amp for each warming light and 0.5 amp for each halogen light. Hoods are available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").
Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B




VentA Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS


DA18/DAH18/PWV18/PWVH18/XR18/XRH18/XRX18/XRXH18 "H" in part number indicates halogen lighting. WBAR warming light bar is available on selected models. X in part number indicates 27" depth.

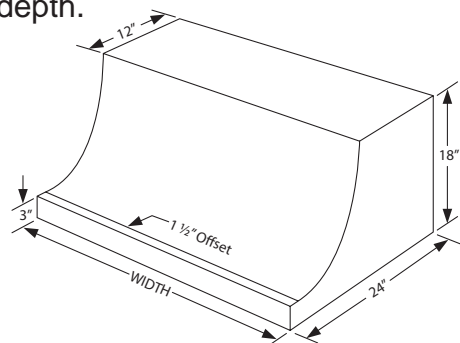

DA18/DAH18

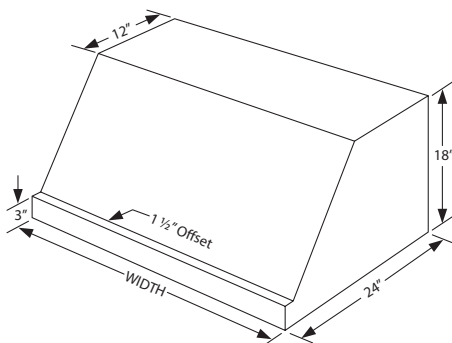


PWV18/PWVH18

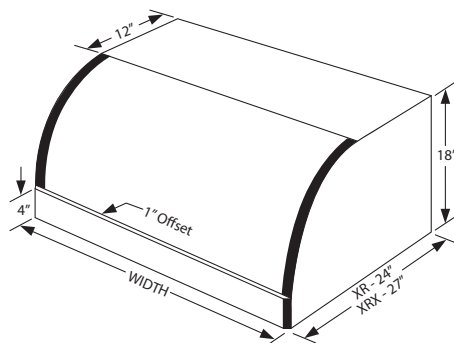


XR(X)18/XR(X)H18

Connection Diagrams (30" - 48" Widths)

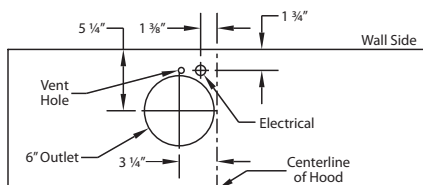


**300 CFM B100 Single Blower
(Top View)**

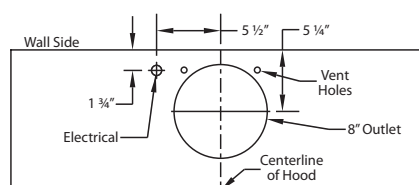


**600 CFM B200 Dual Blower
(Top View)**

Recommended Mounting Height*

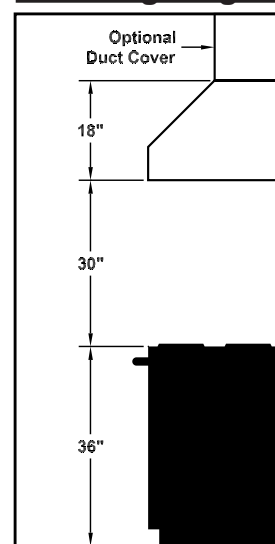


*Exceeding recommended mounting height may compromise performance.

Connection Diagram (42" - 60" Widths)

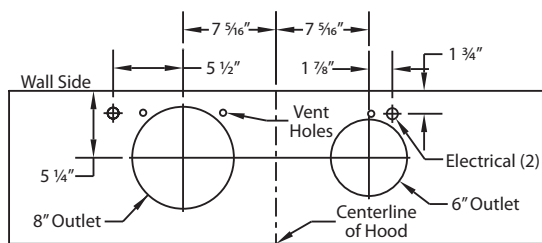


**900 CFM B200 Dual & B100 Single Blower
(Top View)**

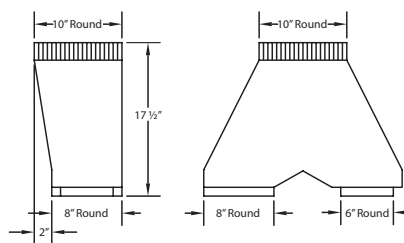


**VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)**


Connection Diagram (48" - 66" Widths)

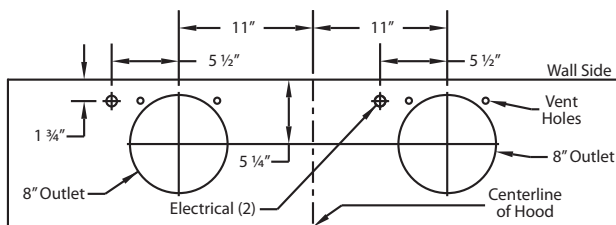

**1200 CFM Double B200 Dual Blowers
(Top View)**

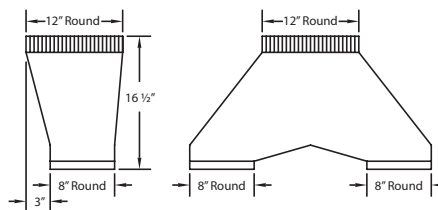

**VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)**

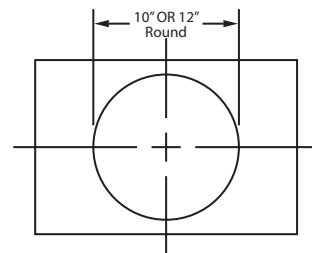

**VP562/VP563
transition
centers outlet
over top of hood**

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in.)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in.)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in.)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in.)	6.6


* Add 2.5 amp for each warming light and 0.5 amp for each halogen light. Hoods are available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").
 # Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0909A

VentAHead® WALL MOUNT RANGE HOOD SPECIFICATIONS


CX30/CXH30/DA30/DAH30/PWV30/PWVH30/SL30/SLH30 "H" in part number indicates halogen lighting. WBAR warming light bar is available on selected models.

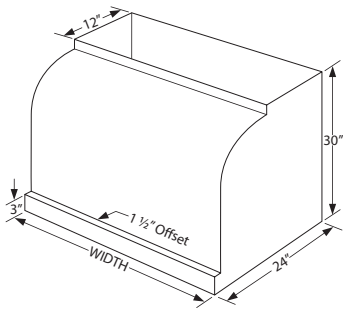


CX30/CXH30

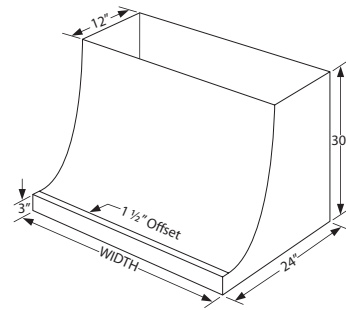

DA30/DAH30

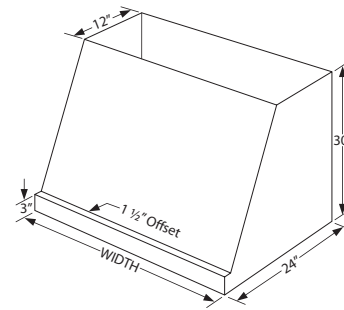


PWV30/PWVH30

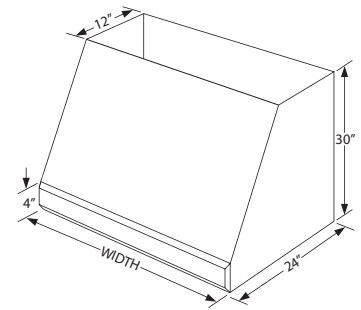


SL30/SLH30

Connection Diagrams (30" - 48" Widths)

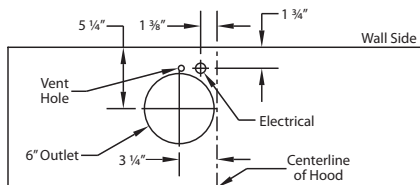


**300 CFM B100 Single Blower
(Top View)**

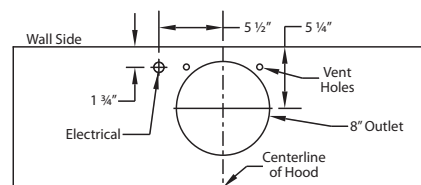


**600 CFM B200 Dual Blower
(Top View)**

Connection Diagram (42" - 60" Widths)

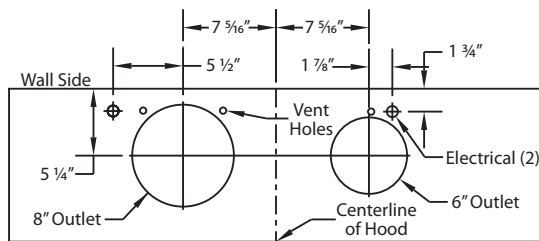


**900 CFM B200 Dual & B100 Single Blower
(Top View)**

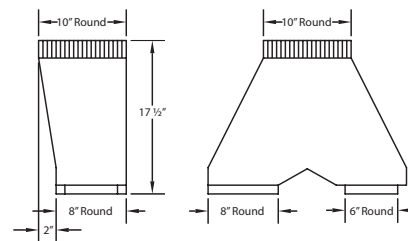


**VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)**


Connection Diagram (48" - 66" Widths)

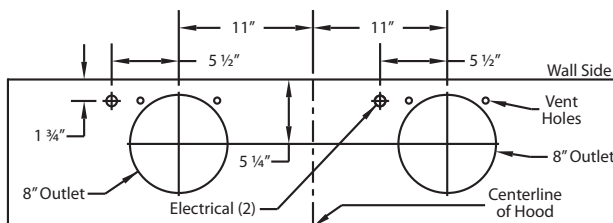

**1200 CFM Double B200 Dual Blowers
(Top View)**

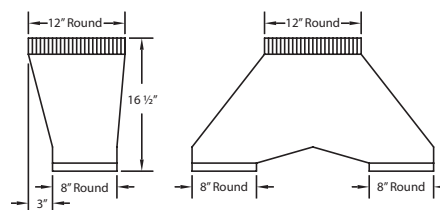


**VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)**

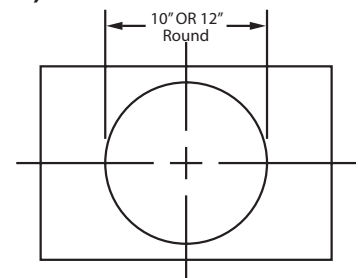

**VP562/VP563
transition
centers outlet
over top of hood**

Recommended Mounting Height*

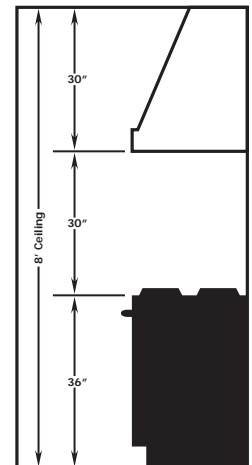

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6


* Add 2.5 amp for each warming light and 0.5 amp for each halogen light. Hoods are available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").
 # Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".
 # Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A




Vent-A-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS


CW/CWH "H" in part number indicates halogen lighting. WL-1 warming lights are available on selected models.

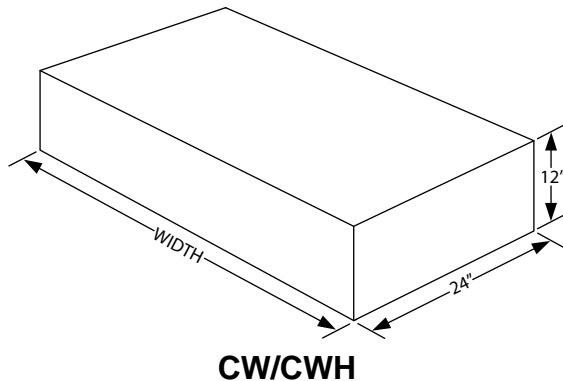

Connection Diagrams (30" - 48" Widths)

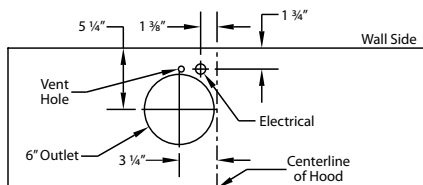


**300 CFM B100 Single Blower
(Top View)**

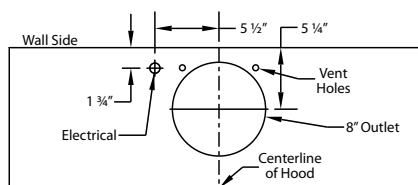


**600 CFM Dual Blower
(Top View)**

Connection Diagram (42" - 60" Widths)

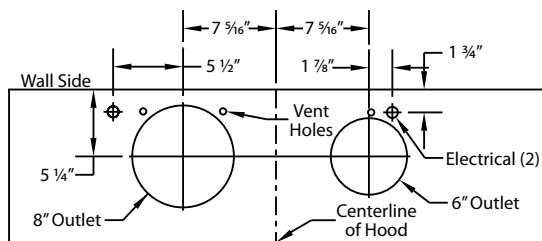


**900 CFM B200 Dual & B100 Single Blower
(Top View)**

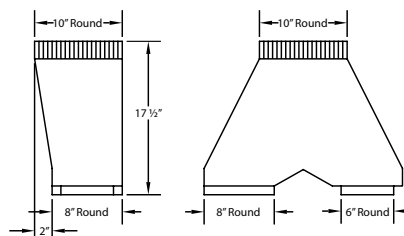


**VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)**


Connection Diagram (48" - 66" Widths)

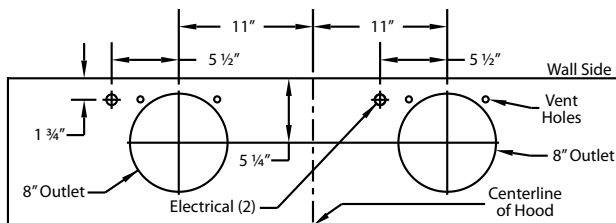

**1200 CFM Double B200 Dual Blowers
(Top View)**

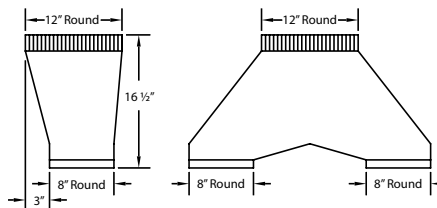


**VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)**

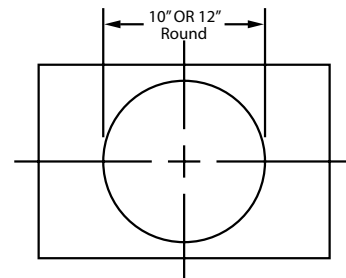

**VP562/VP563
transition
centers outlet
over top of hood**

Recommended Mounting Height*

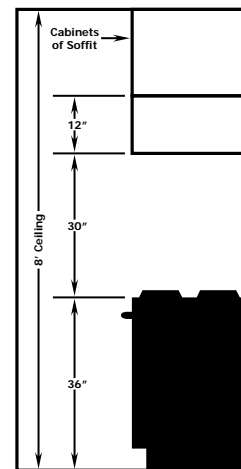

***Exceeding recommended
mounting height may
compromise performance.**

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6

* Add 2.5 amp for each warming light and 0.5 amp for each halogen light. Hood is available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").
 # Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".



Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B




VentA-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS

TLH (Halogen Lights) Not available with heat lamps.
TILT (Fluorescent Light) Not available with heat lamps.

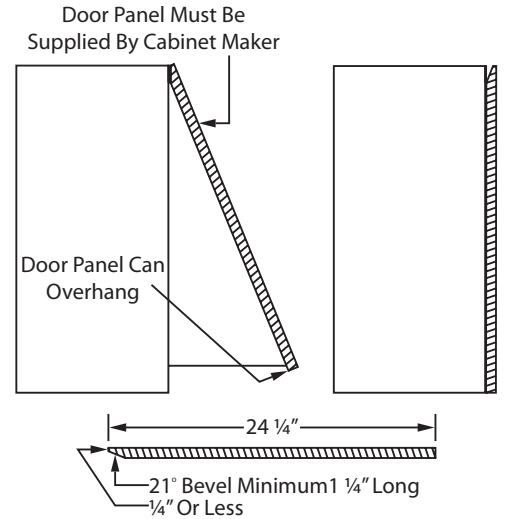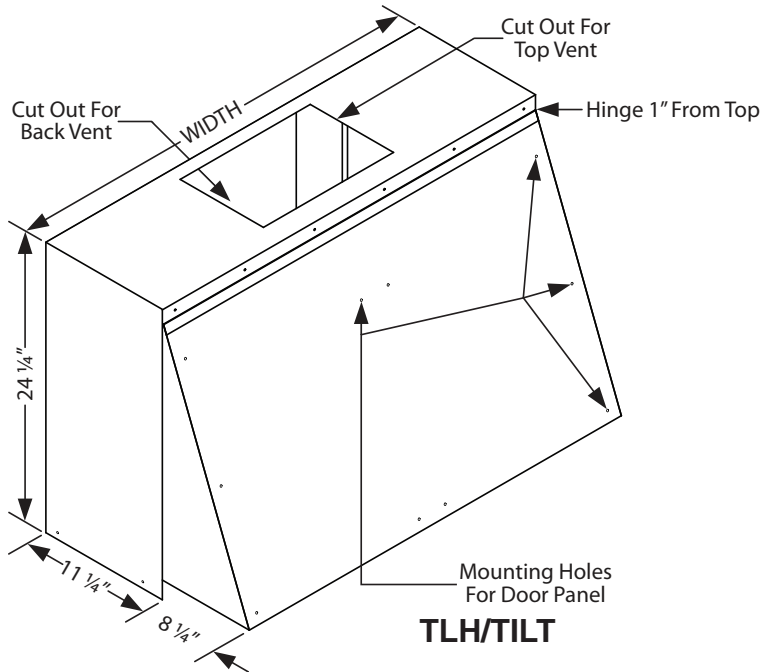


Door Panel Specifications


Connection Diagrams (30" - 48" Widths)

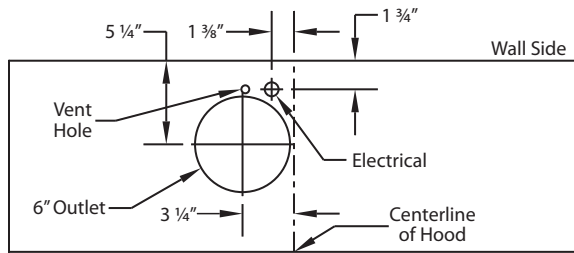


300 CFM B100 Single Blower (Top View)

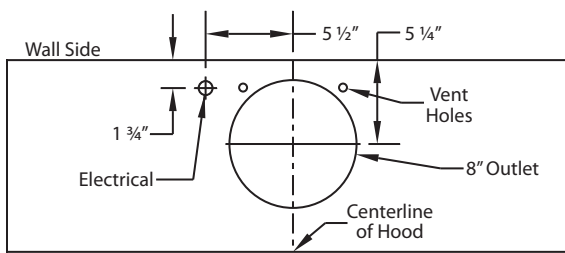

600 CFM B200 Dual Blower (Top View)

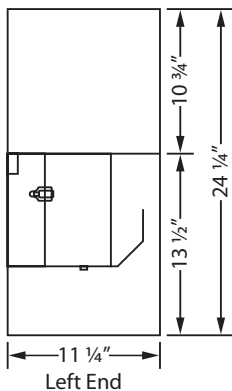


Left End

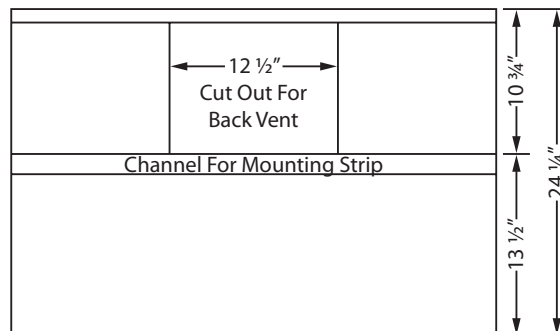

Back View of Hood

Recommended Mounting Height*

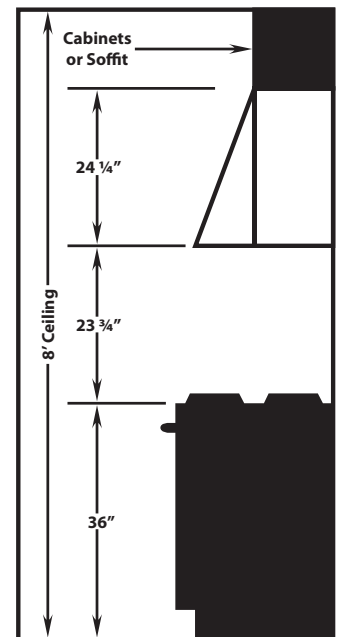

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5

* Add 0.5 amp for each halogen light. Hood is available with a single fluorescent light or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 48").

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0409A


Vent Hood®

EURO-STYLE WALL MOUNT


SUBJECT TO CHANGE WITHOUT NOTICE

VentAHead® EUROSTYLE WALL MOUNT RANGE HOOD SPECIFICATIONS

PD14/PDH14/SLD14/SLDH14 "H" in part number indicates halogen lighting. These models not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes.

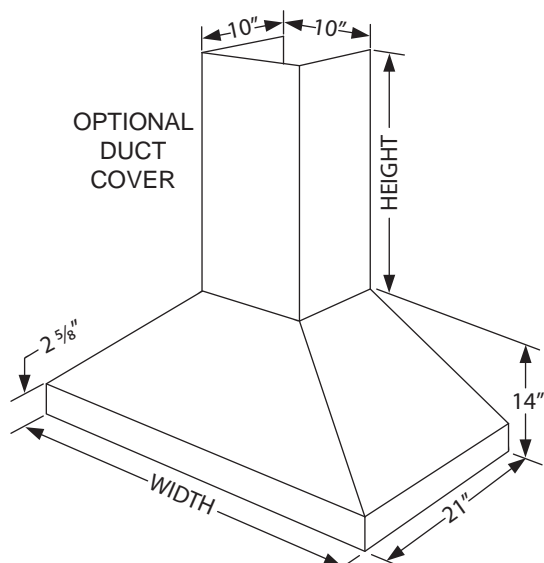


PD14/PDH14

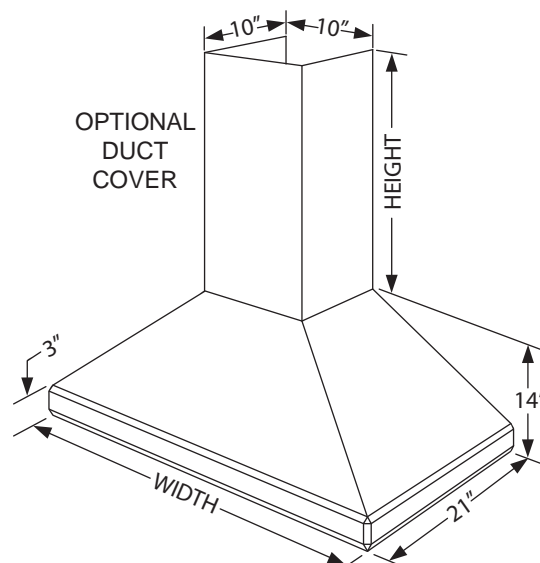


SLD14/SLDH14

30" model is limited to B100 single blower only

Connection Diagram (30" - 48" Widths)

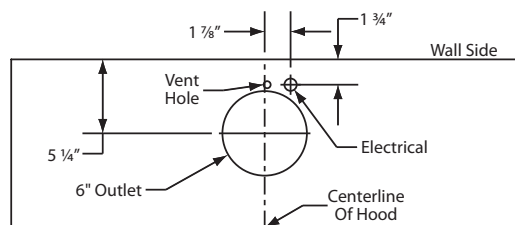


**300 CFM B100 Single Blower
(Top View)**

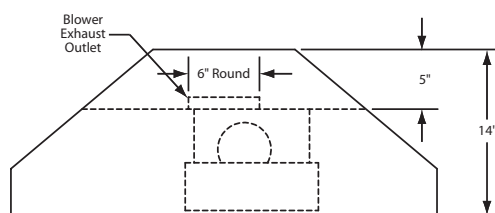


(Front View)

Connection Diagram (36" - 48" Widths)

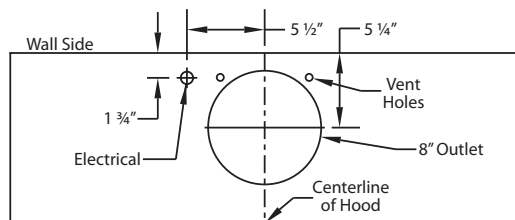


**600 CFM B200 Dual Blower
(Top View)**

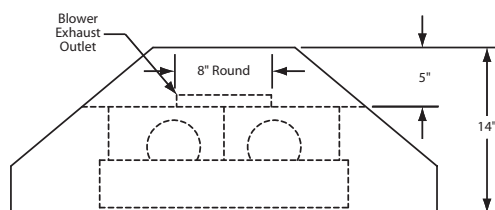

(Front View)

Recommended Mounting Height

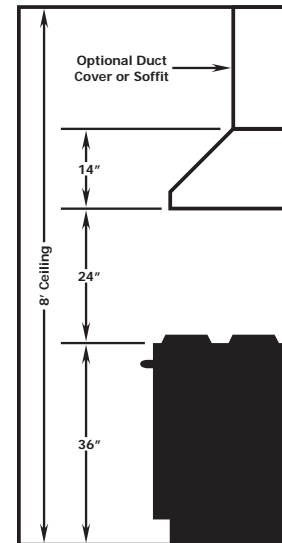

***Exceeding recommended mounting height may compromise performance.**

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5

* Add 0.5 amp for each halogen light. Hood is available with a single fluorescent light or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 48").


Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808A

VentAHead® EUROSTYLE WALL MOUNT RANGE HOOD SPECIFICATIONS


EP(X)18/EP(X)H18/NEP(X)18/NEP(X)H18/SEP(X)18/SEP(X)H18 "H" in part number indicates halogen lighting. These models not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes.

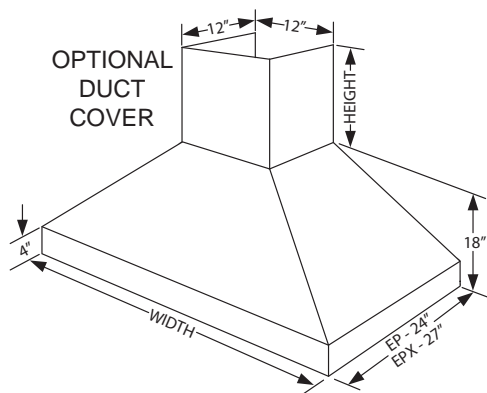

EP(X)18/EP(X)H18

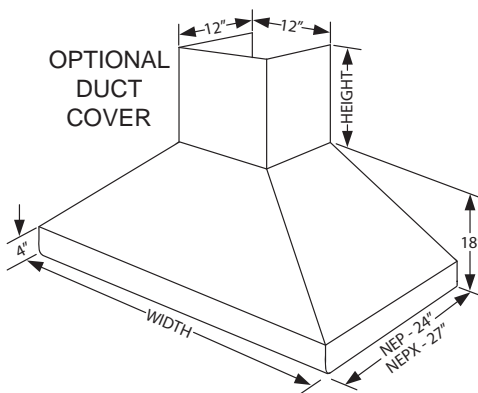


NEP(X)18/NEP(X)H18

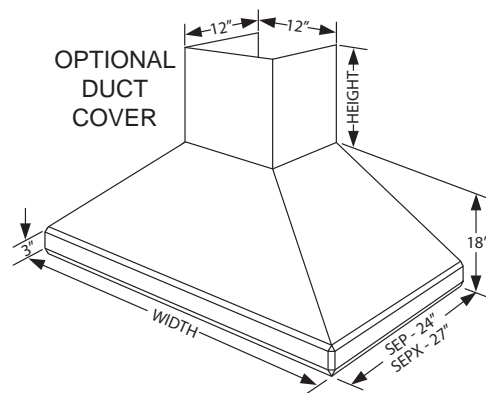


SEP(X)18/SEP(X)H18

(X) in part number indicates 27" depth

Connection Diagram (36" - 48" Widths)

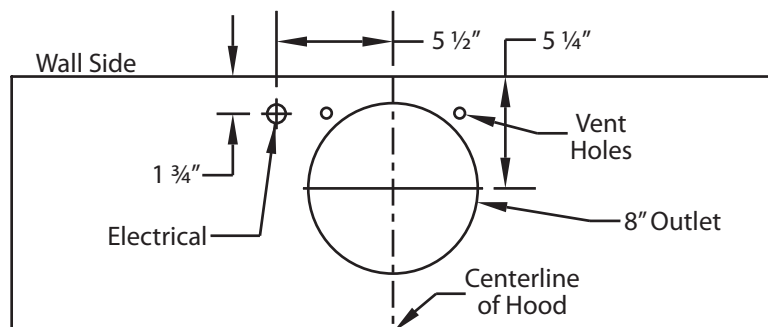


**600 CFM B200 Dual Blower
(Top View)**

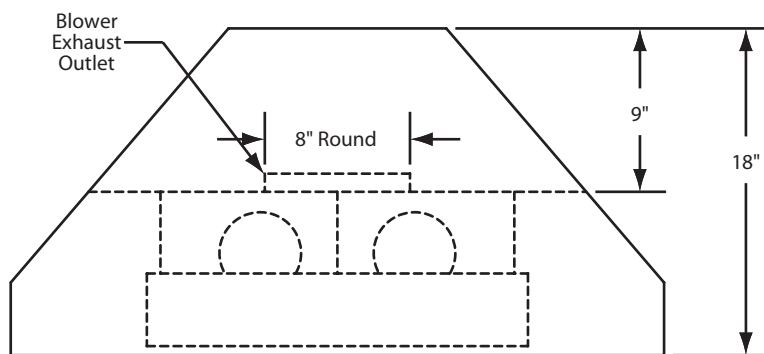

(Front View)

Recommended Mounting Height*

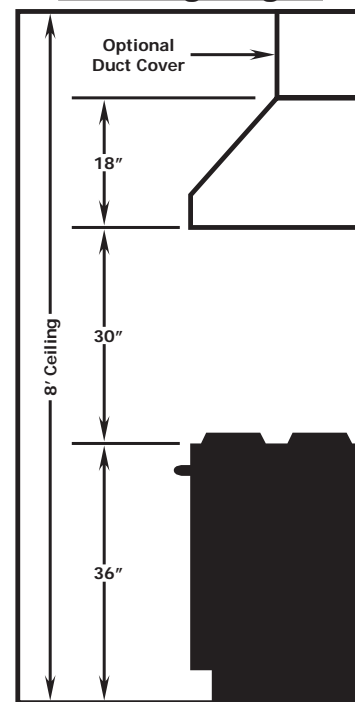

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5

* Add 0.5 amp for each halogen light. Hood is available with a single fluorescent light or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 48").

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808A




VentA Hood® EUROSTYLE WALL MOUNT RANGE HOOD SPECIFICATIONS


EP(X)T18/EP(X)TH18/NEP(X)T18/NEP(X)TH18/SEP(X)T18/SEP(X)TH18 "H" in part number indicates halogen lighting. These models not available with heat lamps. Shown with optional duct cover sold separately). Optional duct covers available in standard and custom sizes.

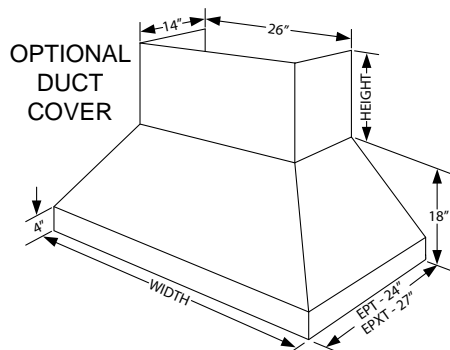

EP(X)T18/EP(X)TH18

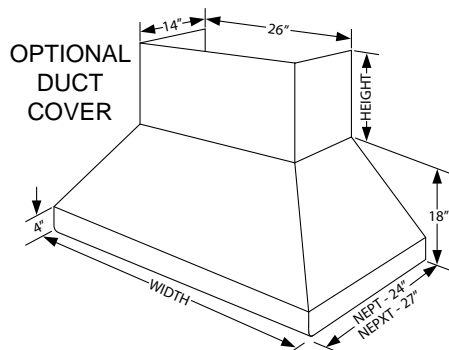


NEP(X)T18/NEP(X)TH18

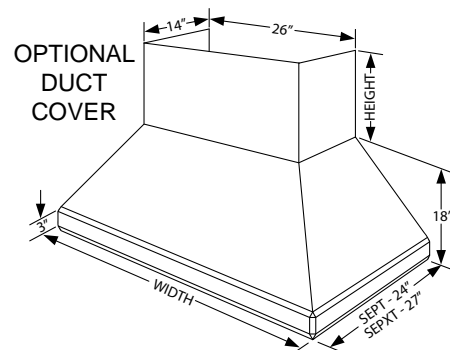


SEP(X)T18/SEP(X)TH18

(X) in part number indicates 27" depth

Connection Diagram (42" - 66" Widths)

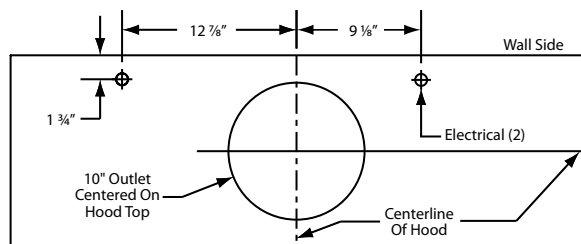


900 CFM B200 Dual & B100 Single Blower (Top View)

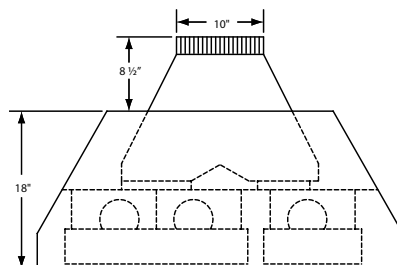


VP562 Standard Transition Installed (Front View)

Connection Diagram (54" - 66" Widths)

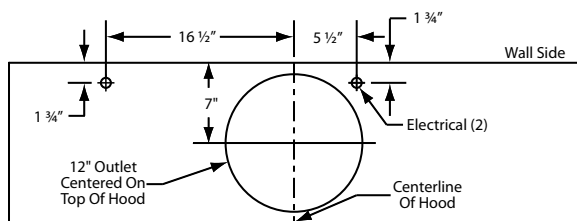


1200 CFM Double B200 Dual Blowers (Top View)

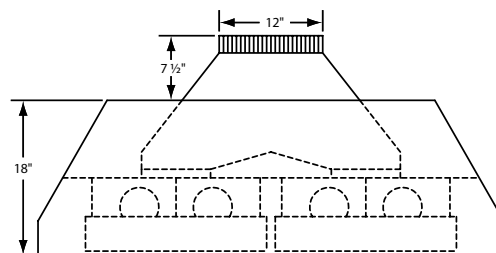


VP563 Standard Transition Installed (Front View)

The transition shown (VP562 & VP563) is installed in the hood at the factory as a standard item. It will be located in the exact center of the duct cover (left to right & front to rear).

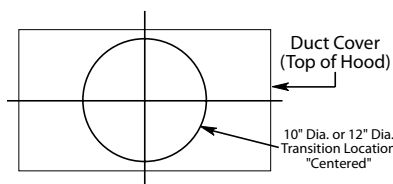

Recommended Mounting Height

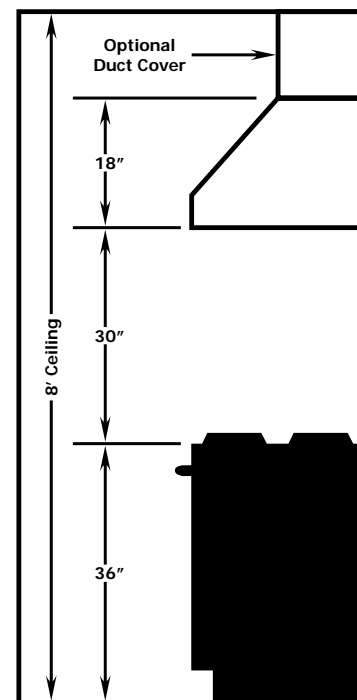

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	12" (113 in. ²)	6.6

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (one for each single or dual blower) or with halogen lights (3 lights: 42" - 53", 4 lights: 54" - 66").

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B


Vent-A-Hood®

**CONTEMPORARY
WALL MOUNT**


SUBJECT TO CHANGE WITHOUT NOTICE

VentA-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS


CWEH6-K Equipped with halogen lighting. This model not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes. Available in painted and stainless steel finishes. Available in 30", 36", 42", and 48" widths only.

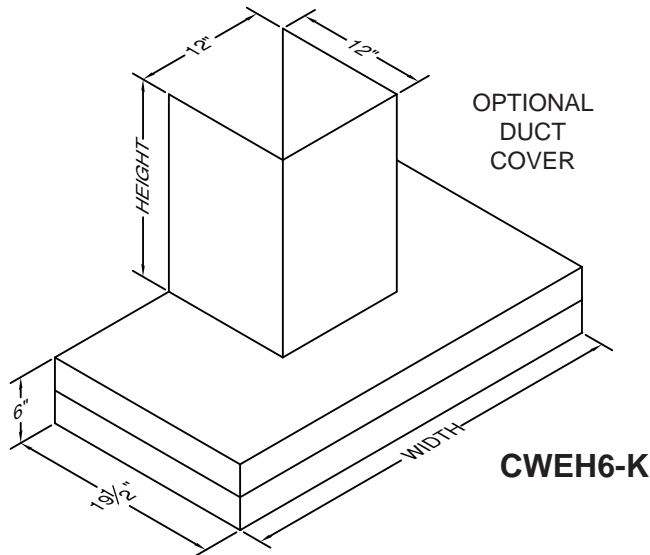


The VP521 transition is available for top vent applications at an additional charge.

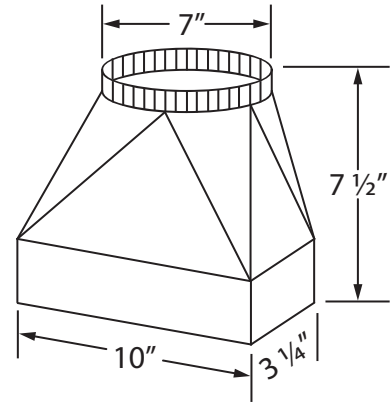

Connection Diagram

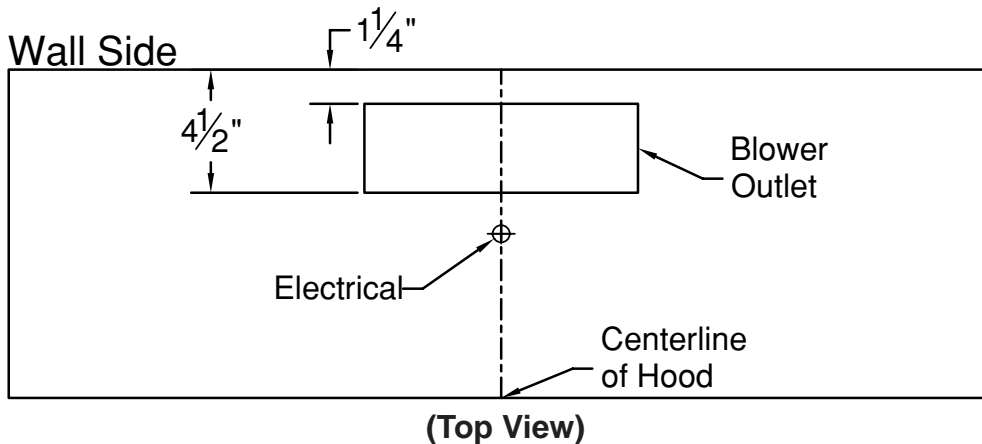


(Top View)

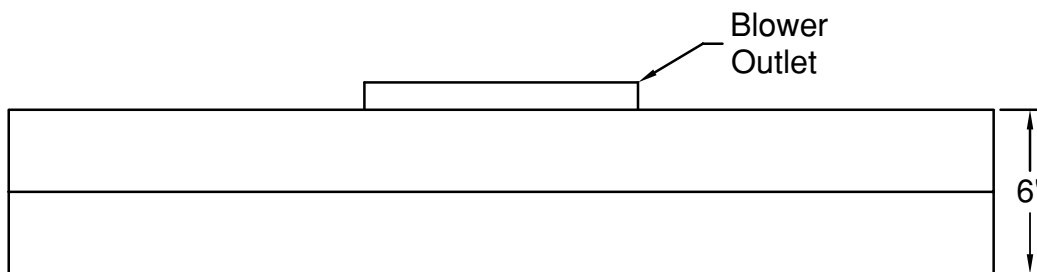

(Front View)

Recommended Mounting Height*

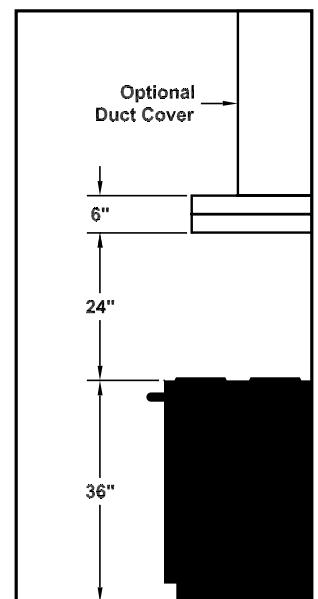

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
K250 (Top Vent)	115	2.2	60	1550	250	375	223	220	190	7" (38 in. ²)	7.4

* Add 0.5 amp for each halogen light. Hood is available with halogen lights (2 lights: 30" & 36"; 3 lights: 42" & 48").

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 1009A




VentA-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS



GTH Equipped with halogen lighting. These models not available with heat lamps. Only available in stainless steel. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes. Pot rail included.

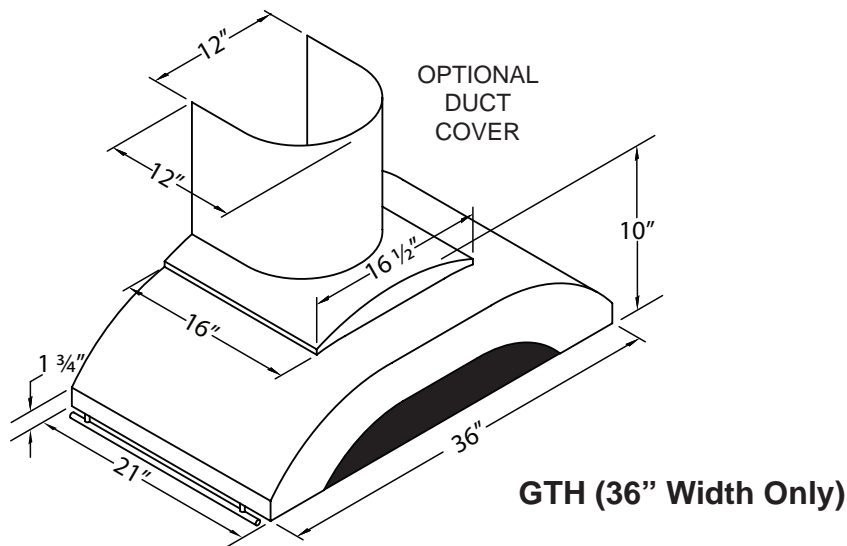


The VP521 transition is available for top vent applications at an additional charge.

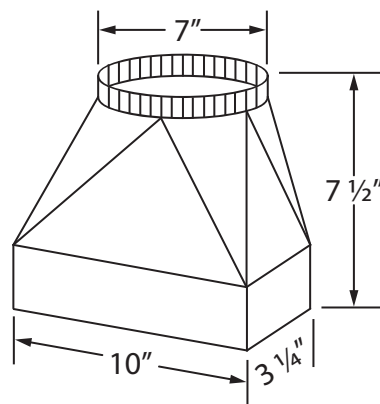

Connection Diagram

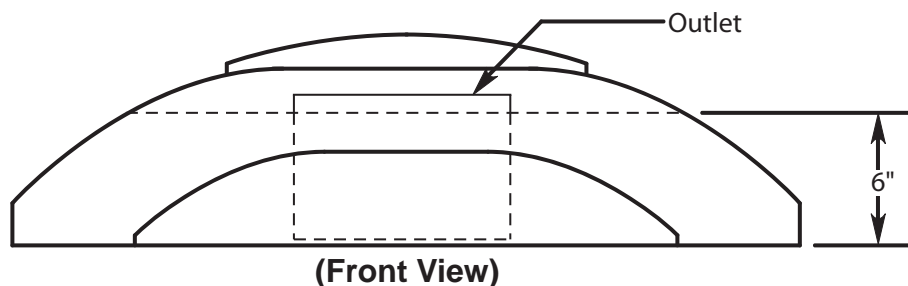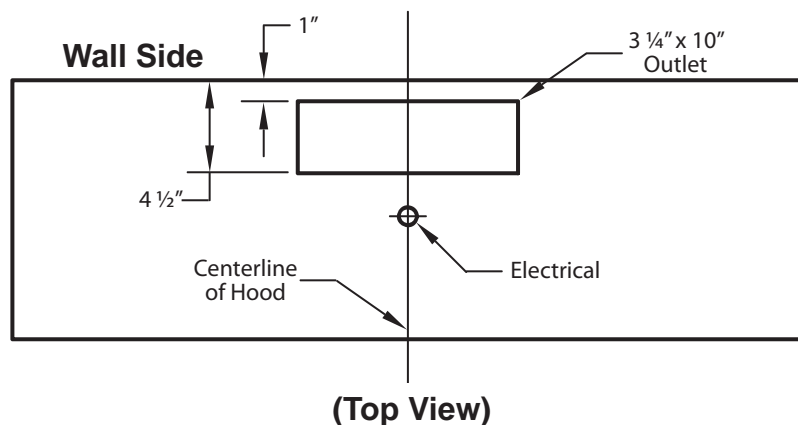

Recommended Mounting Height*

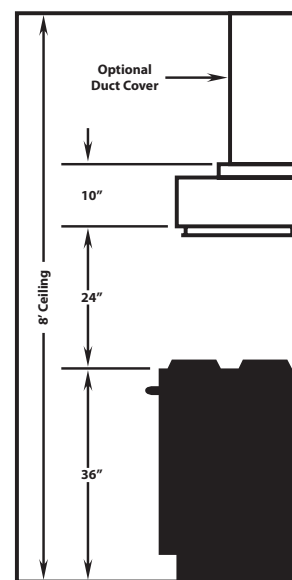

*Exceeding recommended mounting height may compromise performance.

NOTE: DUCT COVER EXTENDS 4" INTO TOP OF HOOD.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
K250 (Top Vent)	115	3.2	60	1550	250	375	223	220	190	7" (38 in. ²)	7.4

All K-Series hoods have two halogen lights.

* Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B




Vent-A-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS

CWEH9 Equipped with halogen lighting. These models not available with heat lamps. Shown with optional duct cover(s) (sold separately). Optional duct covers are available in standard and custom sizes.

OPTIONAL
DUCT
COVER

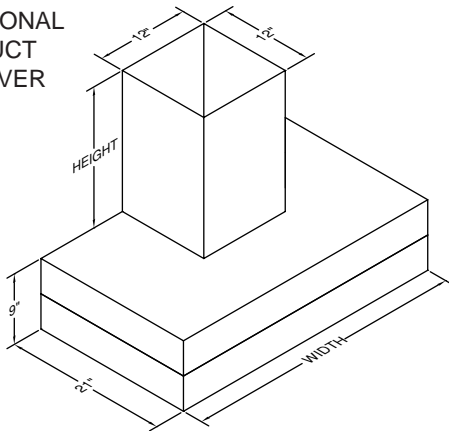


OPTIONAL
DUCT
COVERS

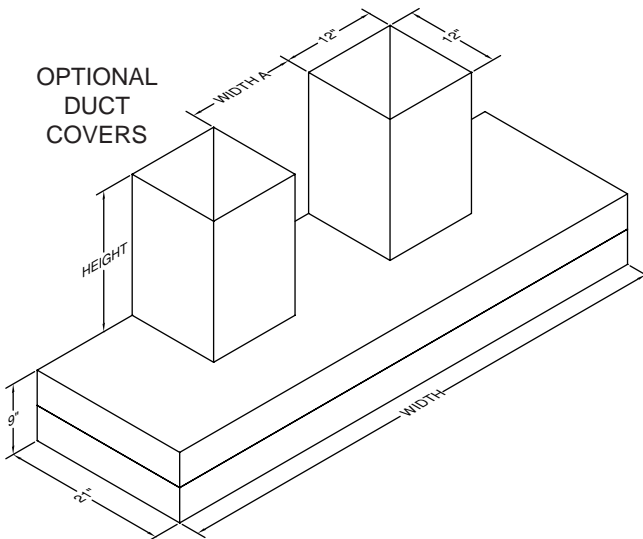


Space Between Duct Covers	
Model	Width A
CWEH9-342	4"
CWEH9-348	8"
CWEH9-354	10"
CWEH9-360	12"
CWEH9-448	10"
CWEH9-454	10"
CWEH9-460	12"
CWEH9-466	14"

Connection Diagram (30"- 48" Widths) Connection Diagram (30"- 54" Widths)

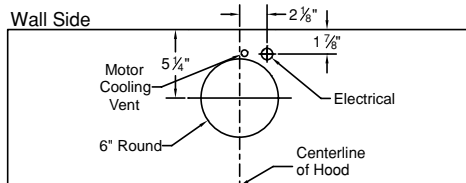


300 CFM B100 Single Blower
(Top View)

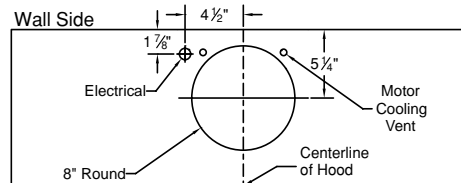

600 CFM B200 Dual Blower
(Top View)

Connection Diagram (42"- 60" Widths)

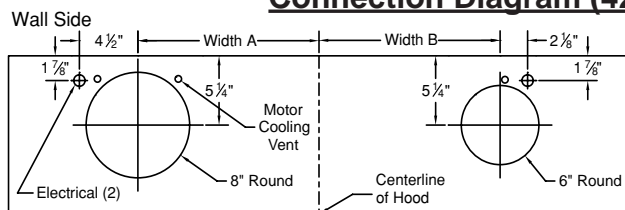


900 CFM B200 Dual & B100 Single Blower
(Top View)

Model	Width A	Width B
CWEH9-342	8"	8"
CWEH9-348	10"	10"
CWEH9-354	11"	11"
CWEH9-360	12"	12"

Outlet Spacing for 900 CFM Models

Connection Diagram (48"- 66" Widths)

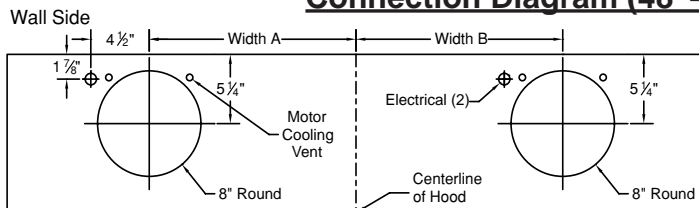

1200 CFM Double B200 Dual Blowers
(Top View)

Model	Width A	Width B
CWEH9-448	11"	11"
CWEH9-454	11"	11"
CWEH9-460	12"	12"
CWEH9-466	13"	13"

Outlet Spacing for 1200 CFM Models

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6


* Add 0.5 amp for each halogen light. Hood is available with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 1009A



Recommended Mounting Height*

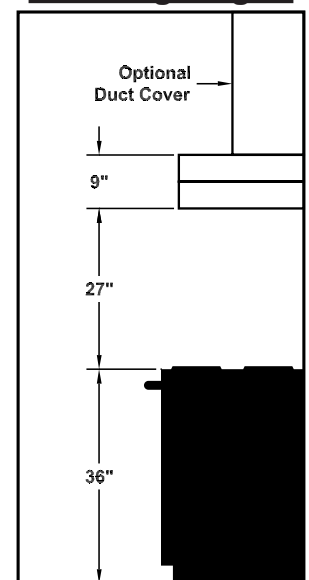


*Exceeding recommended mounting height may compromise performance.

VentA-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS

CWLH9 Equipped with halogen lighting. These models not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers are available in standard and custom sizes (sold separately). Galley rail included.

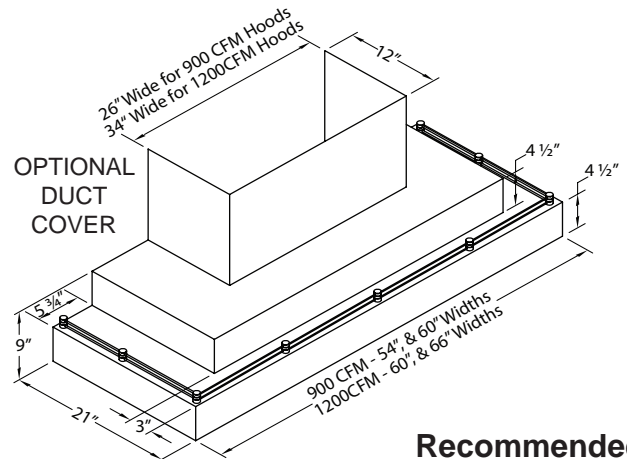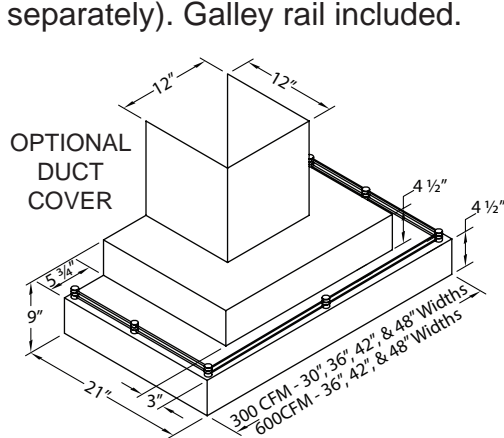


Connection Diagram (30" - 48" Widths)

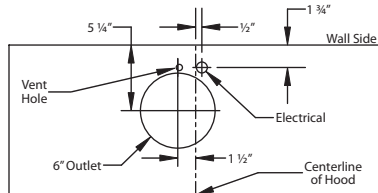


300 CFM B100 Single Blower
(Top View)

Connection Diagram (36" - 48" Widths)

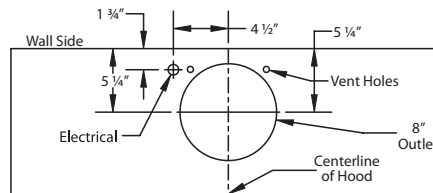


600 CFM B200 Dual Blower
(Top View)

Connection Diagram (54" - 60" Widths)

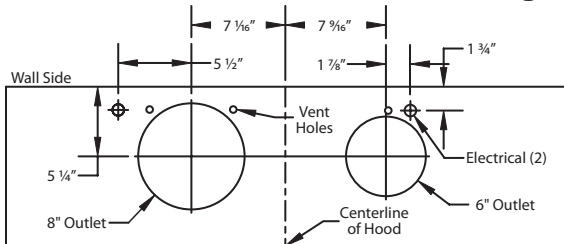


900 CFM B200 Dual & B100 Single Blower
(Top View)

VP562 Transition (Optional) for B300
(B200 Dual & B100 Single Blower)

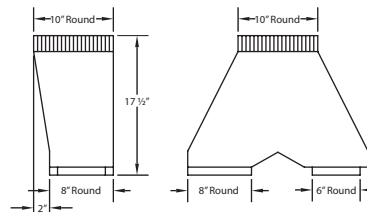


Connection Diagram (60" - 66" Widths)

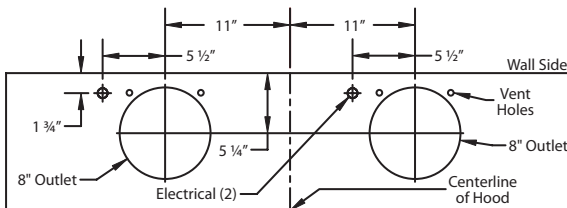


1200 CFM Double B200 Dual Blowers
(Top View)


VP563 Transition (Optional) for B400
(For Double B200 Dual Blowers)

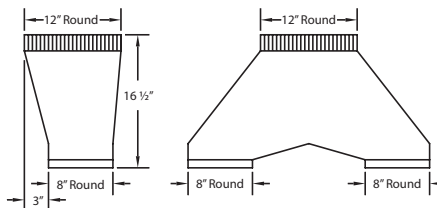

Recommended Mounting Height*

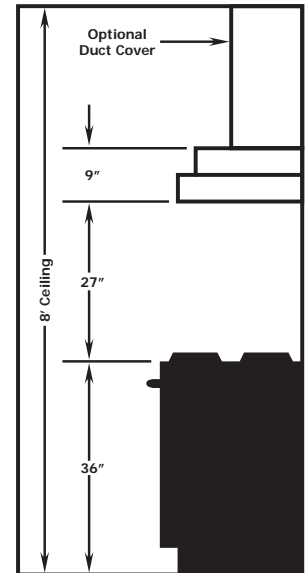

*Exceeding recommended mounting height may compromise performance.

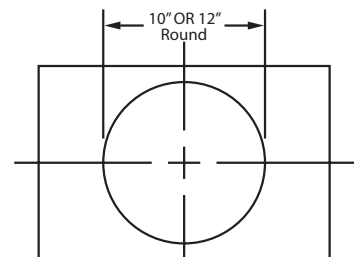

VP562/VP563 transition
centers outlet over
top of hood

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in.)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in.)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in.)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in.)	6.6

* Add 0.5 amp for each halogen light. Hood is available with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66", +1 light for each 14" if over 66").





Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A


VentA-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS

XLH12 Equipped with halogen lighting. This model not available with heat lamps. Only available in stainless steel. Optional duct covers/finished duct available in standard and custom sizes (sold separately).

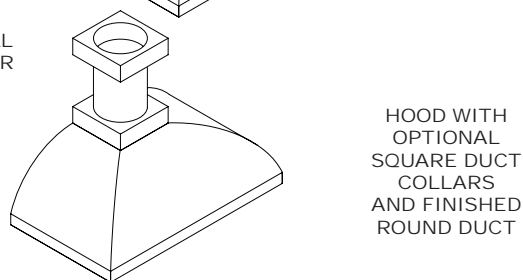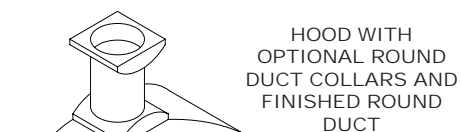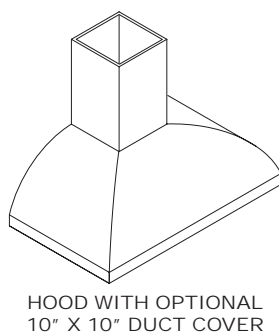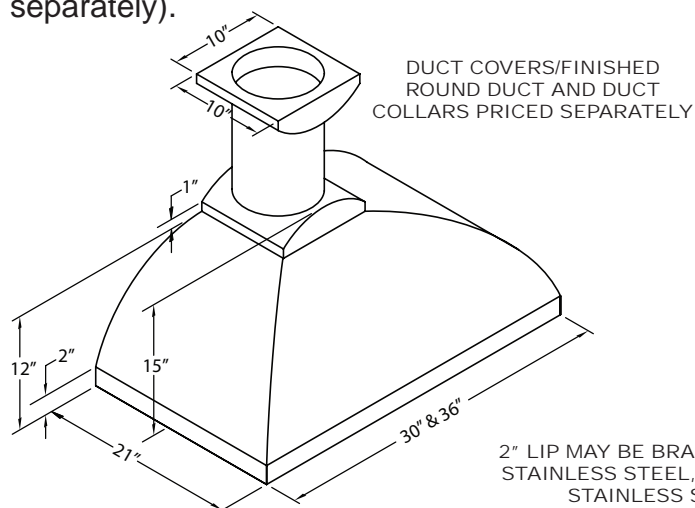


XLH12

Connection Diagram (30" & 36" Widths)

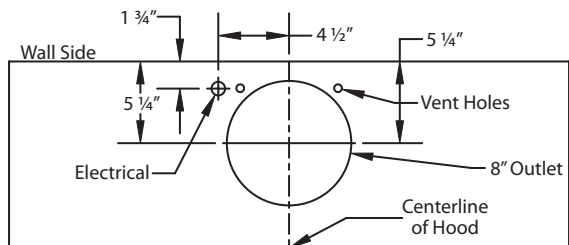


(Top View)

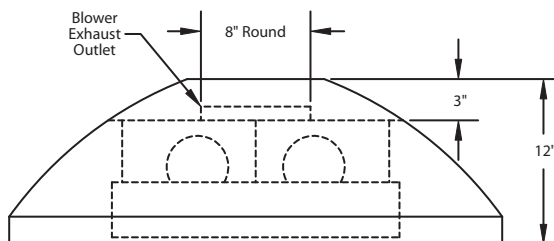

(Front View)



FINISHED ROUND DUCT (REQUIRES TWO DUCT COLLARS)

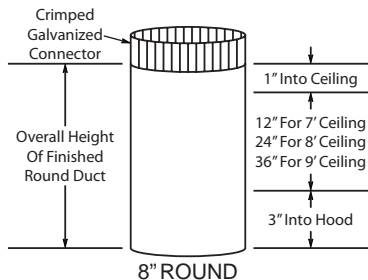


NOTE: TOP END OF FINISHED ROUND DUCT IS CRIMPED TO ALLOW FOR DUCT CONNECTION IN THE CEILING (CRIMP IS NOT INCLUDED IN THE OVERALL HEIGHT OF THE FINISHED ROUND DUCT).

NOTE: WHEN PRICING CUSTOM FINISHED ROUND DUCT, INCLUDE THE 3" THAT EXTENDS INTO TOP OF HOOD AND 1" THAT EXTENDS INTO CEILING (4" TOTAL.) TOTAL OVERALL HEIGHT CANNOT EXCEED 60" (10' 8" CEILING).


ROUND DUCT COLLAR SQUARE DUCT COLLAR

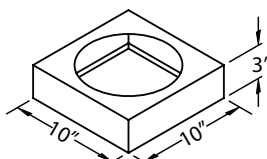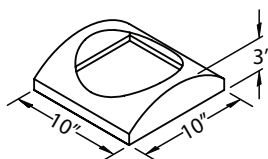

10" x 10" SQUARE DUCT COVER



Recommended Mounting Height*

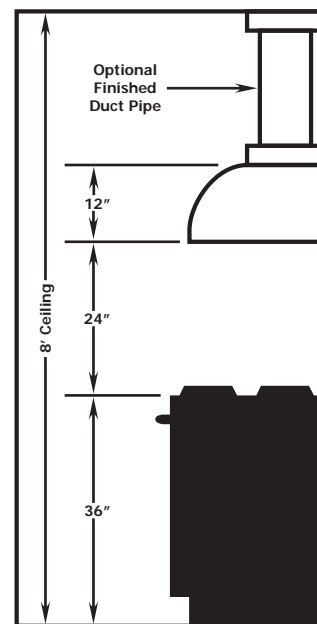

*Exceeding recommended mounting height may compromise performance.

NOTE: DUCT PIPE EXTENDS 3" INTO TOP OF HOOD AND 1" INTO CEILING.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B200 Dual	115	3.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5

Hood has two halogen lights.


* Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A


VentA-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS

ZTH Equipped with halogen lighting. These models not available with heat lamps. Only available in stainless steel. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes (sold separately). Fixed pot rails included.

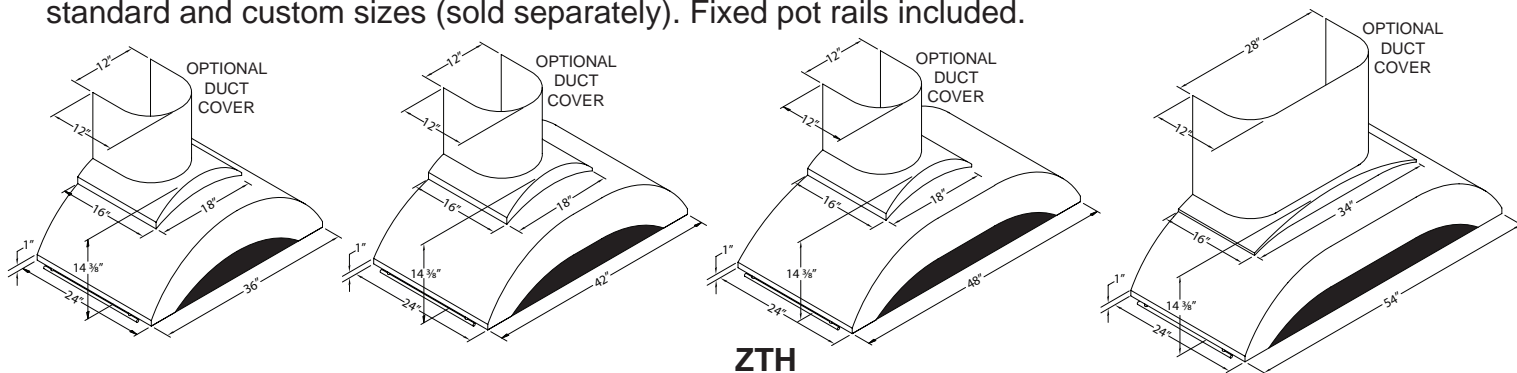


ZTH

Connection Diagram (36"- 48" Widths)

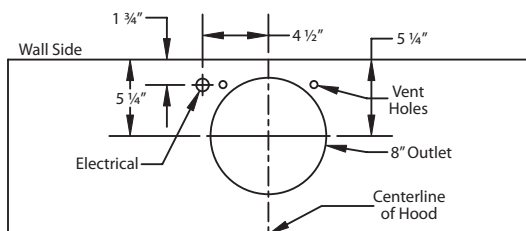


**600 CFM B200 Dual Blower
(Top View)**

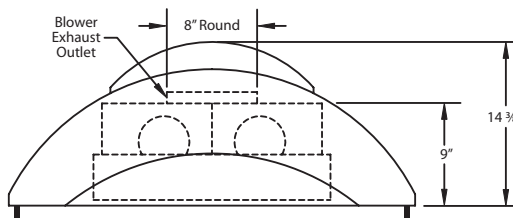


(Front View)

Connection Diagram (54" Width)

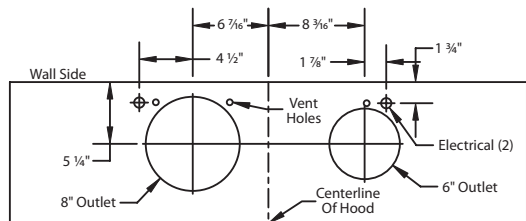


**900 CFM B200 Dual Blower
& B100 Single Blower
(Top View)**

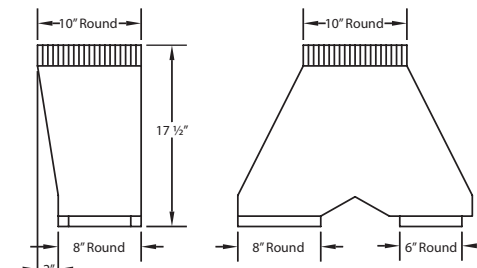


**VP562 Transition (Optional) For B300
For B200 Dual and B100 Single Blower**

Recommended Mounting Height*

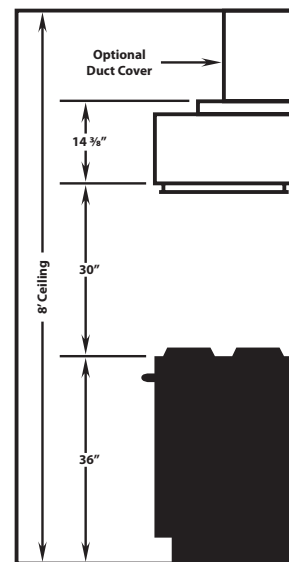


*Exceeding recommended mounting height may compromise performance.

NOTE: DUCT COVER EXTENDS 5 3/8" INTO TOP OF HOOD.

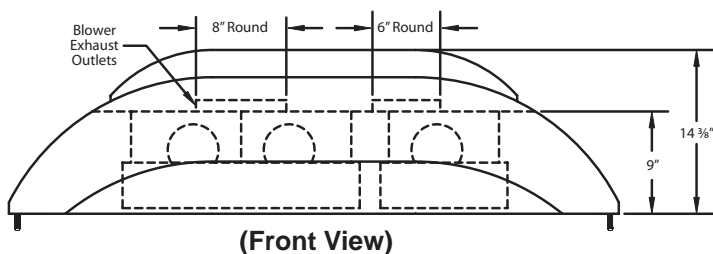

(Front View)

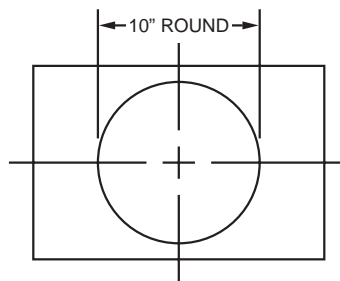

**VP562 transition
centers outlet over
top of hood**

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B200 Dual	115	4.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	6.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3

Hood has four halogen lights (one light in each corner).

* Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B




Vent Hood®

RETRO STYLE
SUBJECT TO CHANGE WITHOUT NOTICE

Vent-A-Hood® RETRO STYLE WALL MOUNT RANGE HOOD SPECIFICATIONS


AH12 Halogen lights only. This model is not available with heat lamps. Painted round duct and ceiling collar are priced separately.

Includes side wing panels and splash panel. Splash panel is 30" tall x hood width.

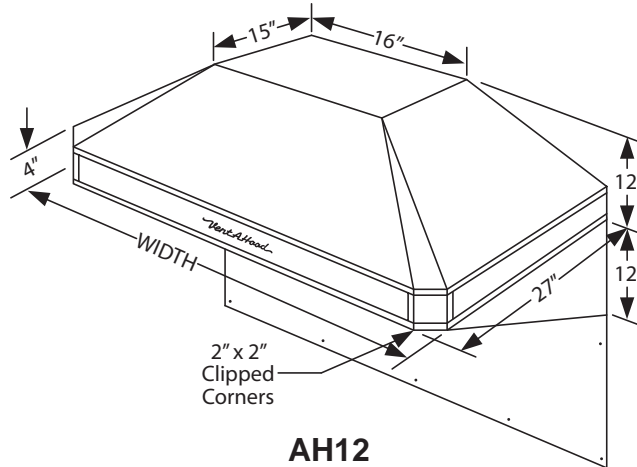


AH12

Connection Diagram (30" - 48" Widths) 30" Model is Limited to B100 Single Blower Only

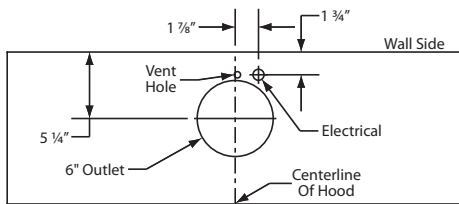


**300 CFM B100 Single Blower
(Top View)**

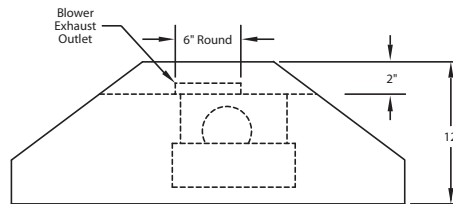


(Front View)

Connection Diagram (36" - 48" Widths)

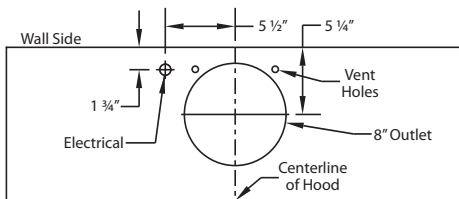


**600 CFM B200 Dual Blower
(Top View)**

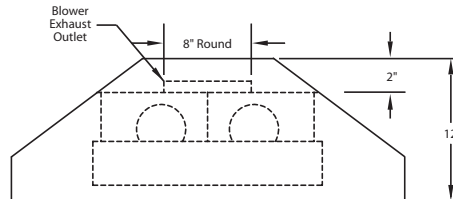

(Front View)


Recommended Mounting Height*

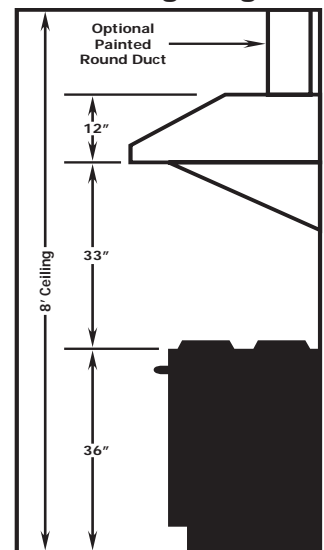


*Exceeding recommended mounting height may compromise performance.

NOTE: DUCT PIPE EXTENDS 2" INTO TOP OF HOOD AND 1" INTO CEILING.

Optional Painted Round Duct

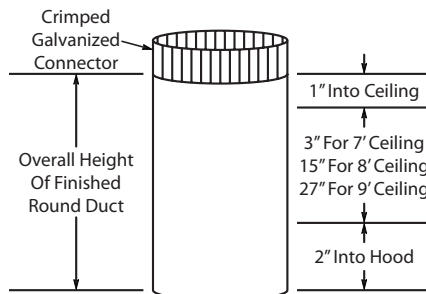

Optional Ceiling Collars

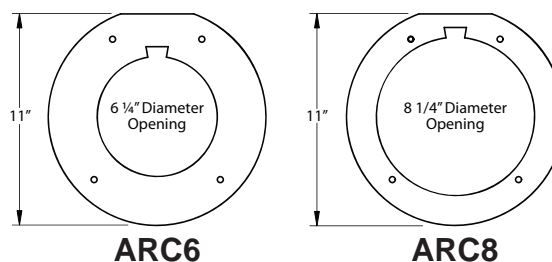

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5

* Add 0.5 amp for each halogen light. Hood is available with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 48").

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0908A




RETRO STYLE UNDER CABINET RANGEHOOD SPECIFICATIONS

CLH9 Halogen lights only.

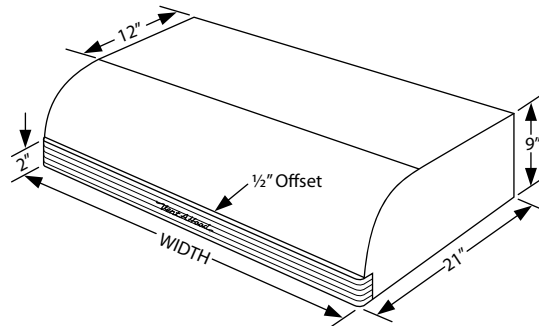


CLH9

Connection Diagram (30" - 48" Widths)

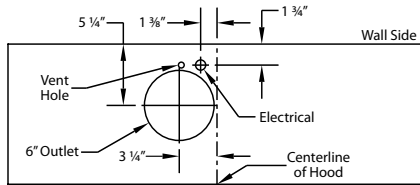


300 CFM B100 Single Blower
(Top View)

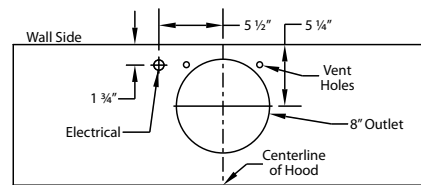


600 CFM B200 Dual Blower
(Top View)

Connection Diagram (42" - 48" Widths)

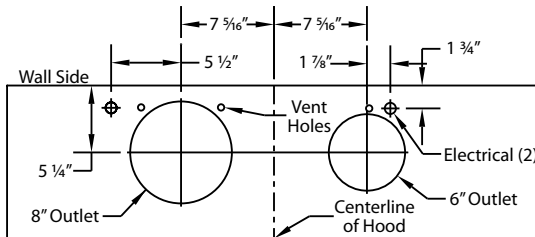


900 CFM B200 Dual & B100 Single Blower
(Top View)

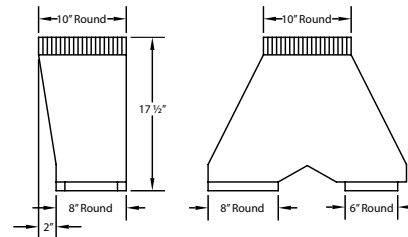


VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)

Connection Diagram (48" Width)

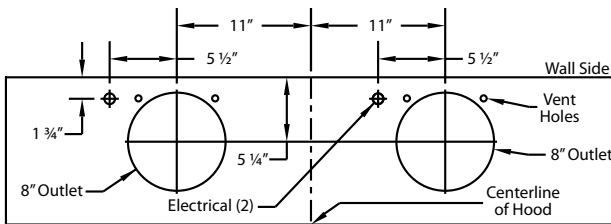


1200 CFM Double B200 Dual Blowers
(Top View)

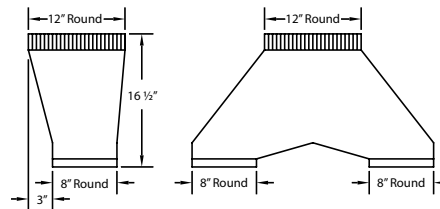


VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)

Recommended Mounting Height*

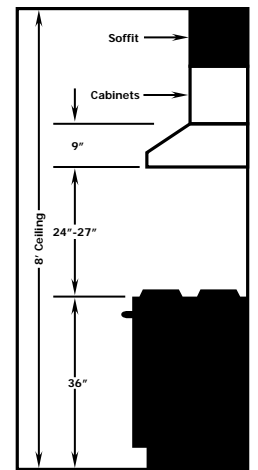

*Exceeding recommended mounting height may compromise performance.

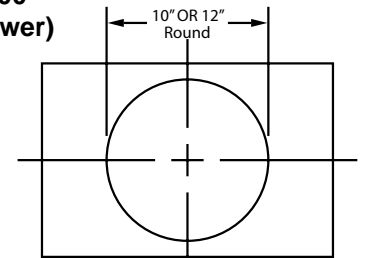

VP562/VP563
transition
centers outlet
over top of hood

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6

* Add 0.5 amp for each halogen light. Hood is available with halogen lights (2 lights: 30" - 41"; 3 lights: 42" - 48").

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808A




Vent Ahead®

ISLAND


SUBJECT TO CHANGE WITHOUT NOTICE

VentAHead® ISLAND RANGE HOOD SPECIFICATIONS


ISF18/ISFH18/ISL18/ISLH18/IXR18/IXRH18 "H" in part number indicates halogen lighting. These models not available with heat lamps.

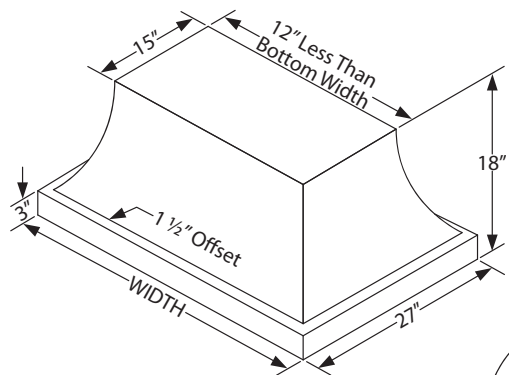


ISF18/ISFH18

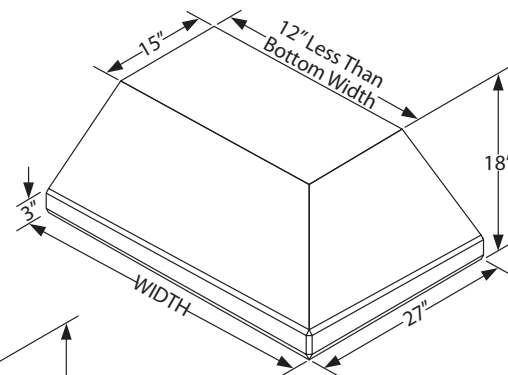


ISL18/ISLH18

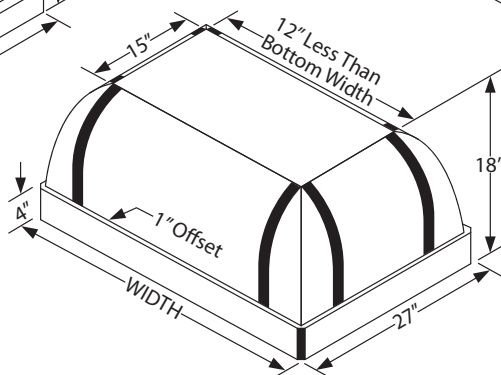


IXR18/IXRH18

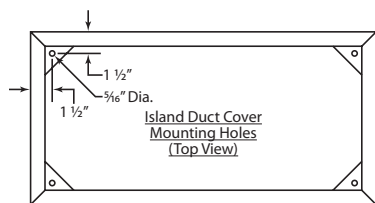


Connection Diagram (36" - 54")

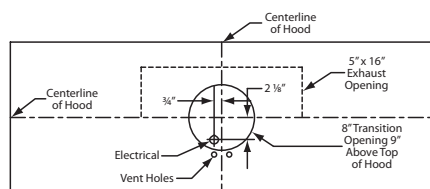


550 CFM T200 Dual Blower
(Top View)

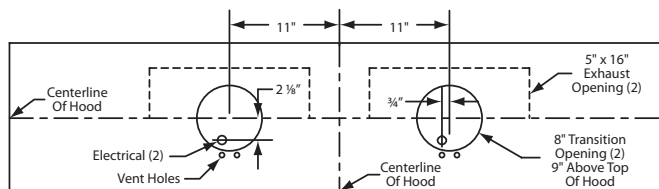

1100 CFM T2+ 200 Dual Blowers
(Top View)

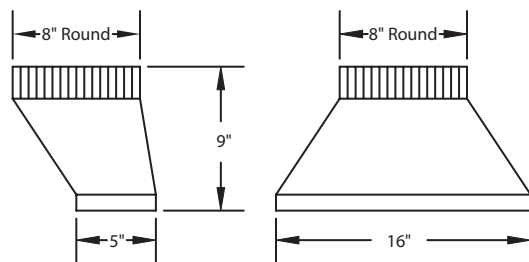


VP565 Standard Transition
(Included)

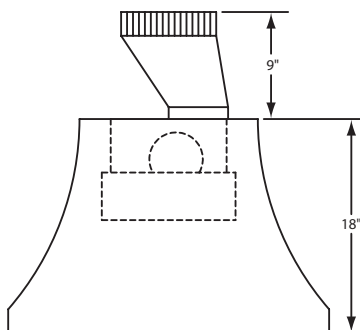

Transition Installed
(Side View)

Recommended Mounting Height*

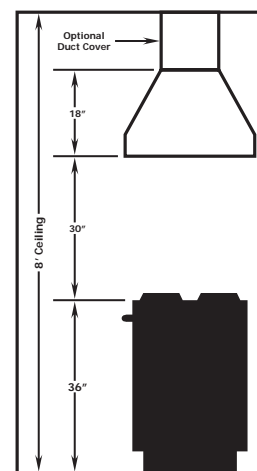

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (two for each dual blower) or with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A




VentAHead® ISLAND RANGE HOOD SPECIFICATIONS

PL18/PLH18/PLX18/PLXH18/PY18/PYH18 "H" in part number indicates halogen lighting. These models not available with heat lamps.

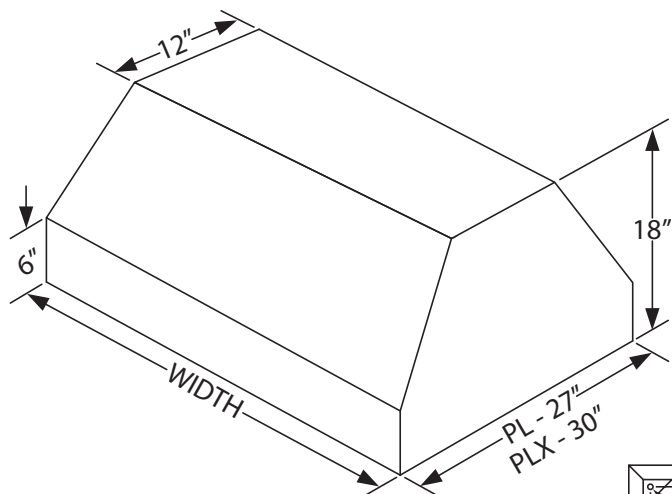


PL(X)18/PL(X)H18

"X" in model number indicates 30" depth

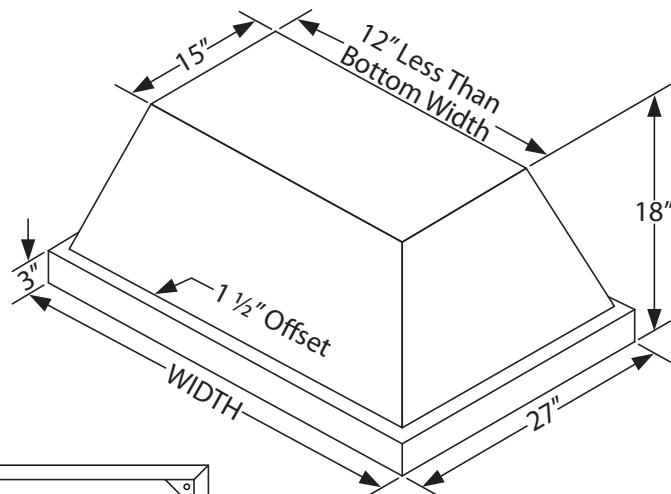


PY18/PYH18

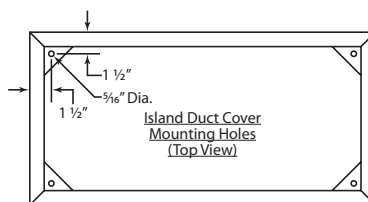


Island Duct Cover Mounting Holes (Top View)

Connection Diagram (36" - 54")

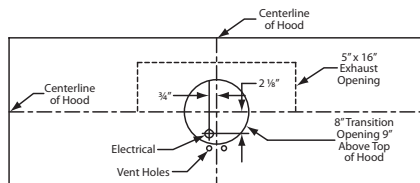


550 CFM T200 Dual Blower (Top View)

Connection Diagram (60" - 66")

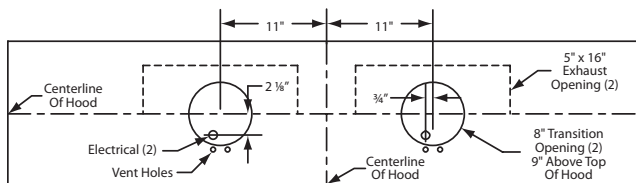


1100 CFM T2+ 200 Dual Blowers (Top View)


Recommended Mounting Height*

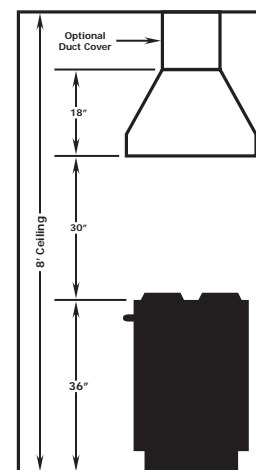

*Exceeding recommended mounting height may compromise performance.

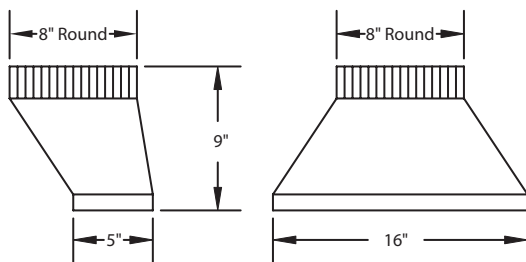

VP565 Standard Transition (Included)

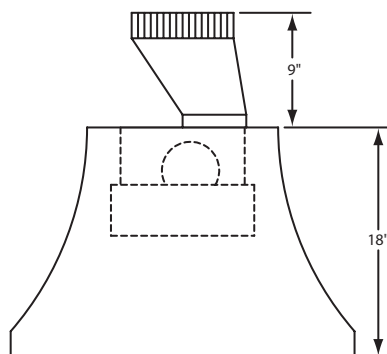

Transition Installed (Side View)

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (two for each dual blower) or with halogen lights (one in each corner).


Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A

VentA Hood® ISLAND RANGE HOOD SPECIFICATIONS


ICX30/ICXH30/ISF30/ISFH30 "H" in part number indicates halogen lighting. These models not available with heat lamps.

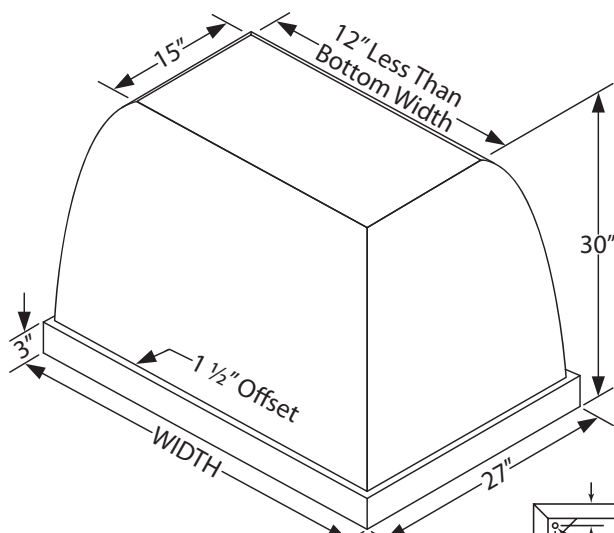


ICX30/ICXH30

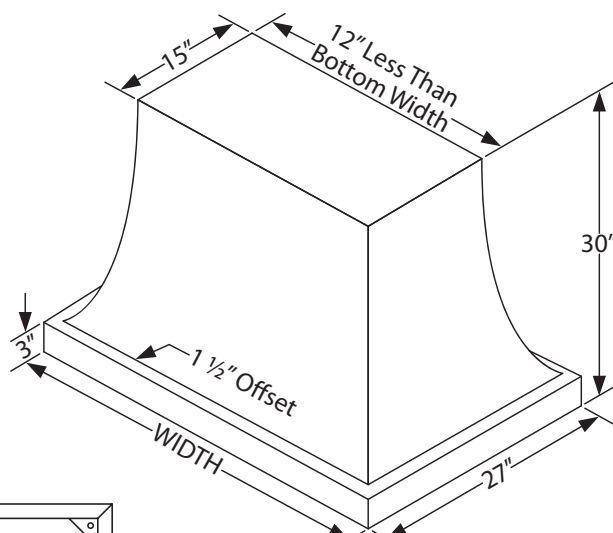

ISF30/ISFH30

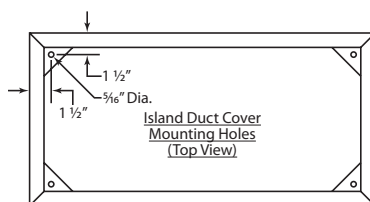


Connection Diagram (36" - 54")

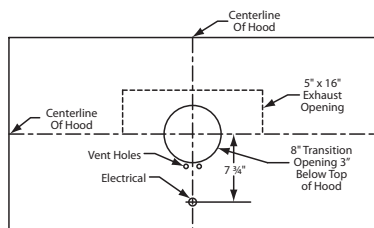


550 CFM T200 Dual Blower
(Top View)

Connection Diagram (60" - 66")

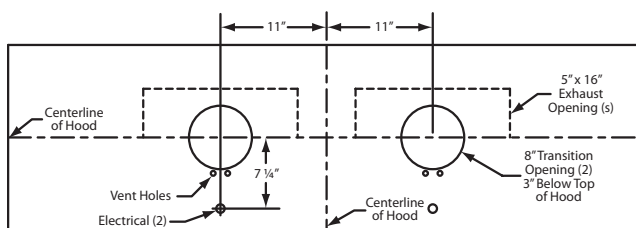


1100 CFM T2+ 200 Dual Blowers
(Top View)


Recommended Mounting Height*

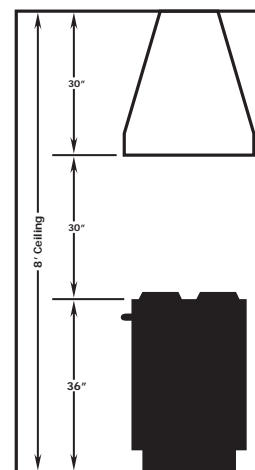

*Exceeding recommended mounting height may compromise performance.

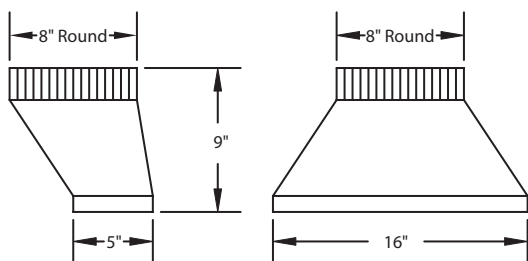

VP565 Standard Transition
(Included)

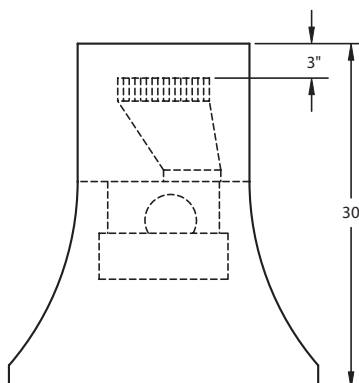

Transition Installed
(Side View)

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (two for each dual blower) or with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A



VentAHead® ISLAND RANGE HOOD SPECIFICATIONS




ISL30/ISLH30/PY30/PYH30 "H" in part number indicates halogen lighting. These models not available with heat lamps.

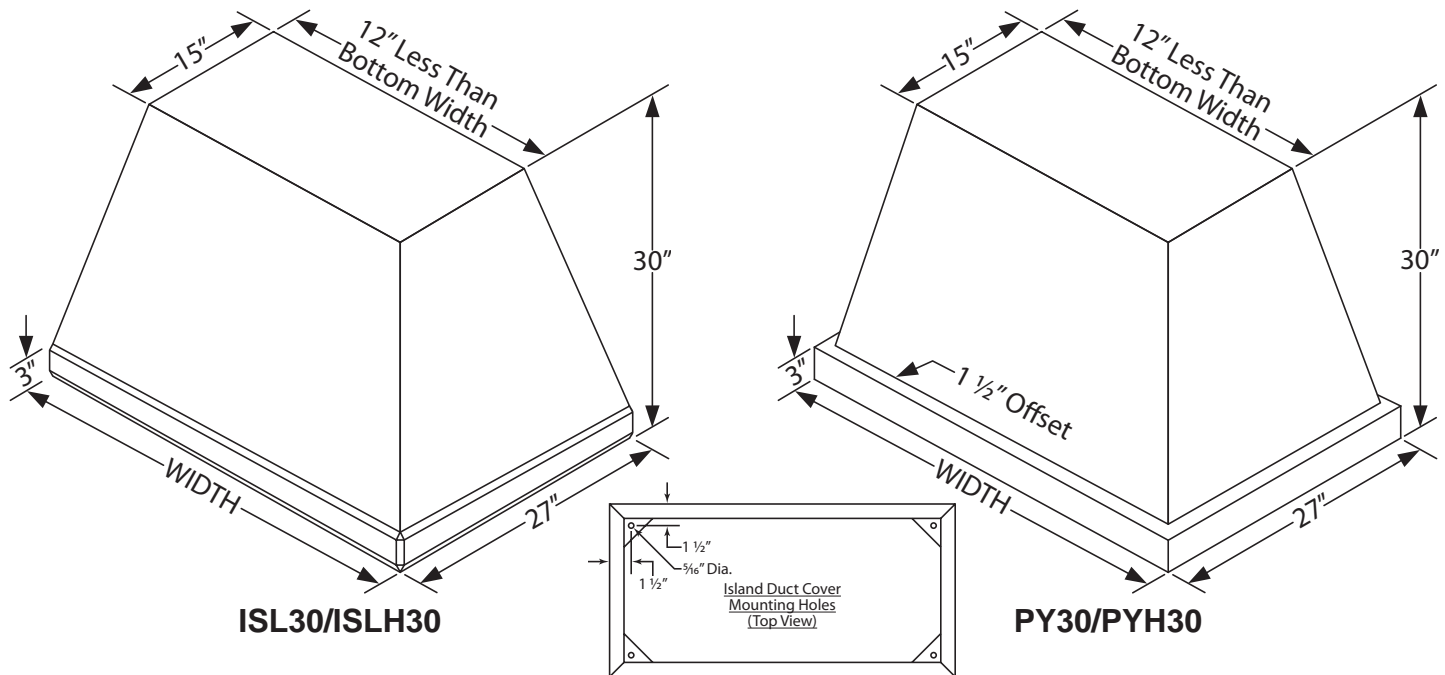


Connection Diagram (36" - 54")

Connection Diagram (60" - 66")


Recommended Mounting Height*

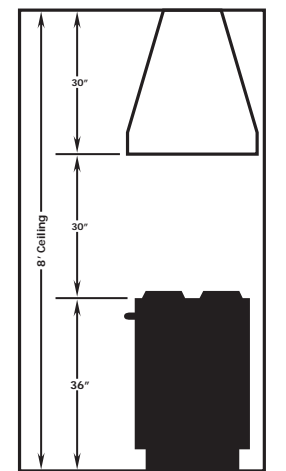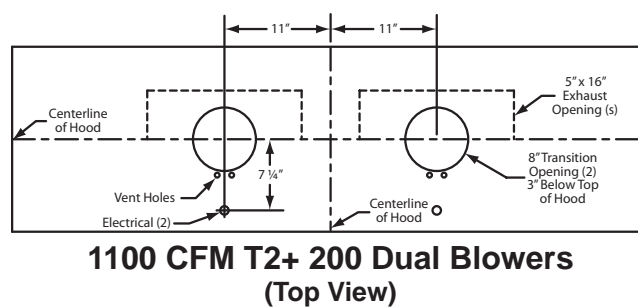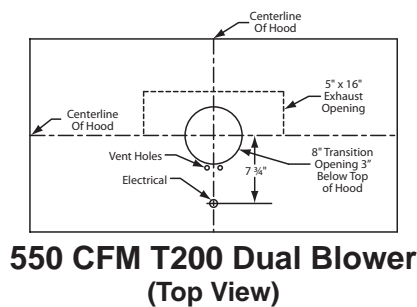

*Exceeding recommended mounting height may compromise performance.

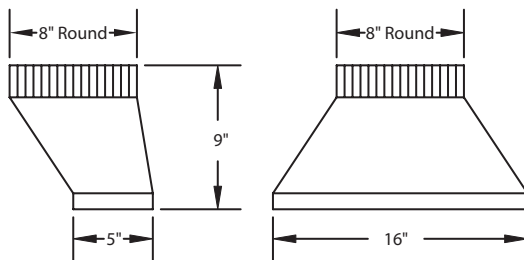

VP565 Standard Transition (Included)

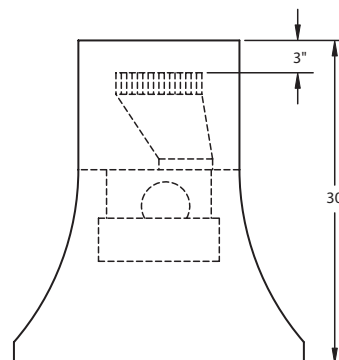

Transition Installed (Side View)

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (two for each dual blower) or with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A




Vent-A-Hood® ISLAND RANGE HOOD SPECIFICATIONS

CO/COH "H" in part number indicates halogen lighting. This model not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes.

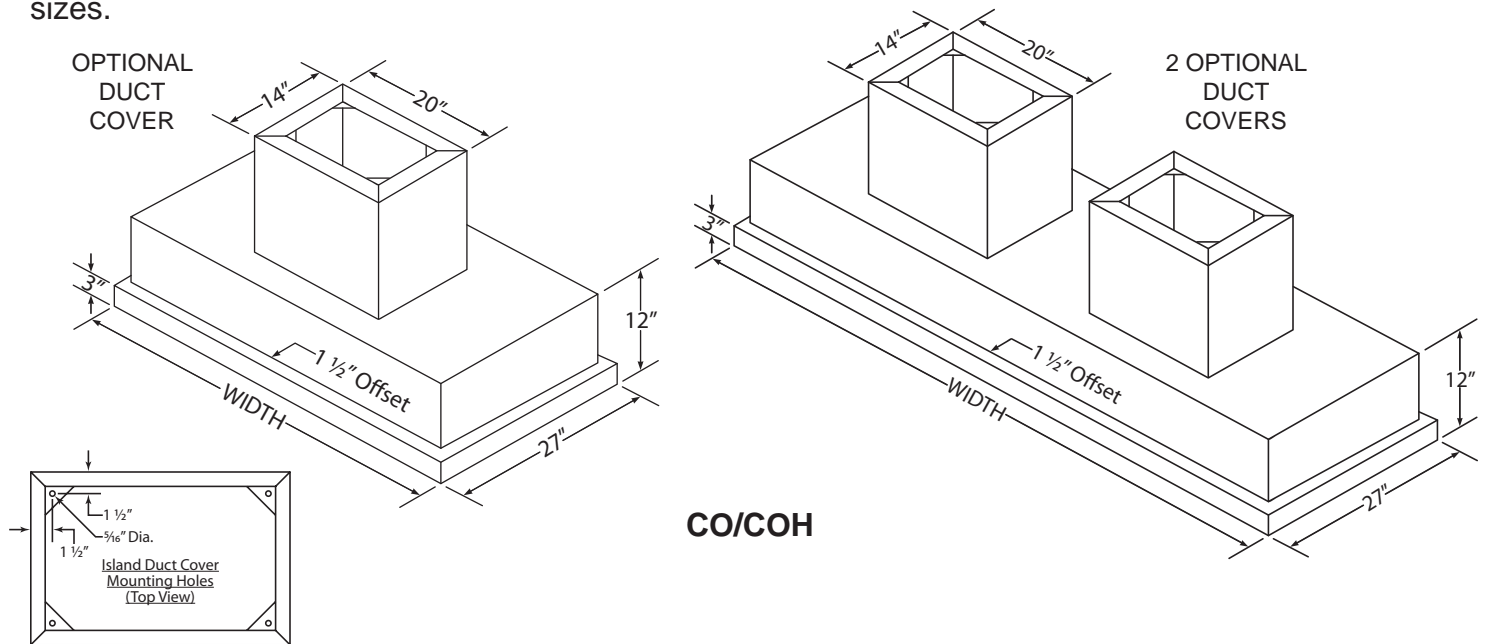


Connection Diagram (36" - 54")

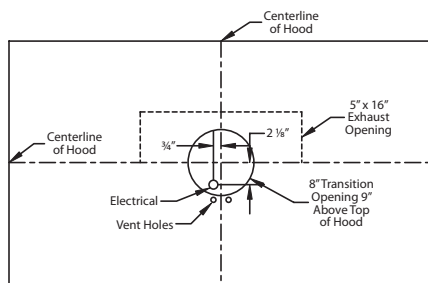


550 CFM T200 Dual Blower (Top View)

Connection Diagram (60" - 66")

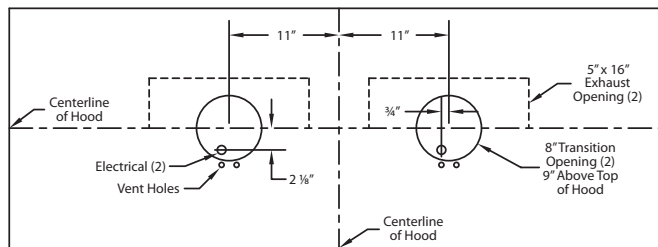


1100 CFM T2+ 200 Dual Blowers (Top View)


Recommended Mounting Height*

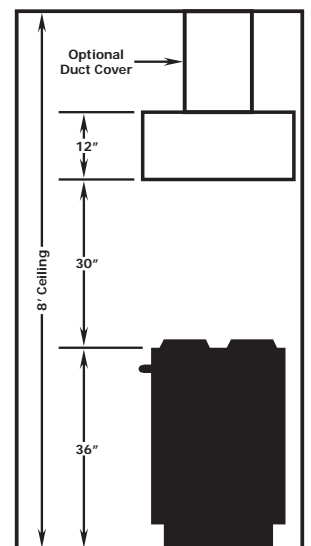

*Exceeding recommended mounting height may compromise performance.

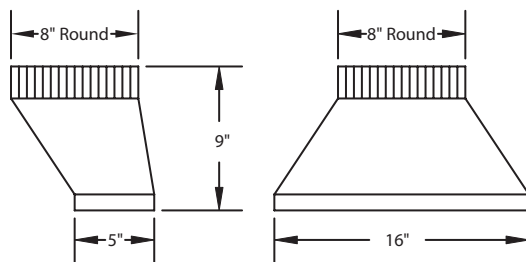

VP565 Standard Transition (Included)

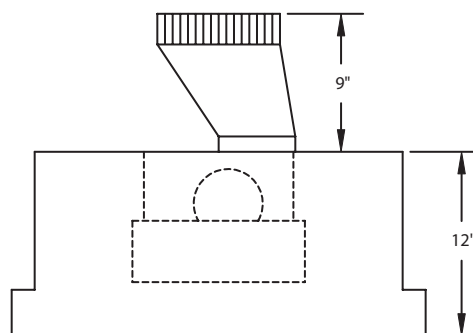

Transition Installed (Side View)

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (two for each dual blower) or with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0209A




Vent Hood®

EURO-STYLE ISLAND


SUBJECT TO CHANGE WITHOUT NOTICE

VentA Hood® EUROSTYLE ISLAND RANGE HOOD SPECIFICATIONS


ISD18/ISDH18/PYD18/PYDH18 "H" in part number indicates halogen lighting. These models not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes.

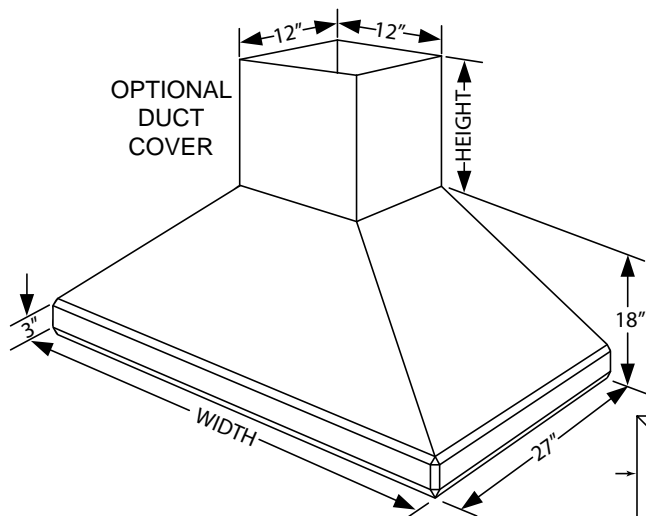


ISD18/ISDH18

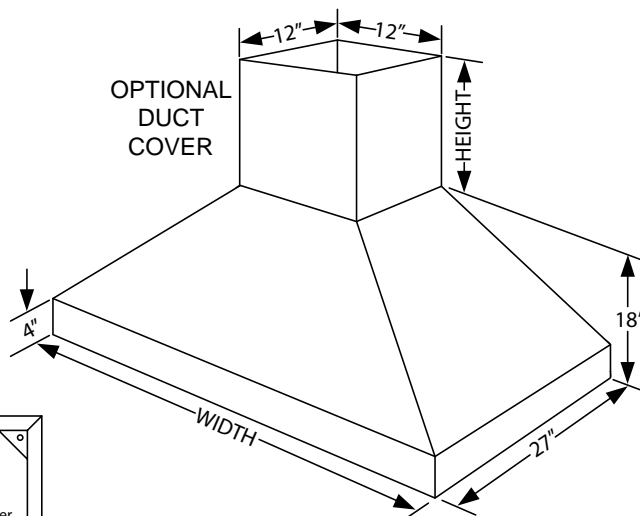


PYD18/PYDH18




Connection Diagram (36" - 48" Widths)

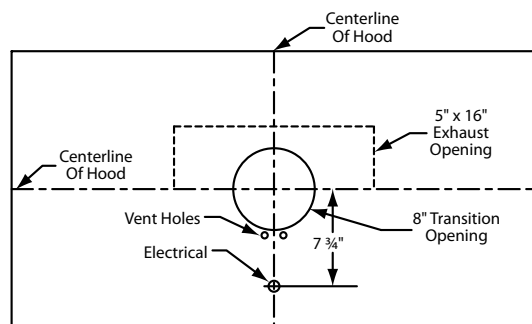

**550 CFM T200 Dual Blower
(Top View)**

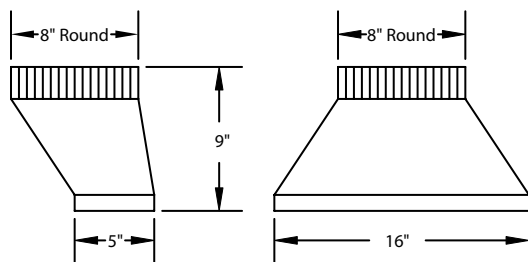


**VP565 Standard Transition
(Included)**

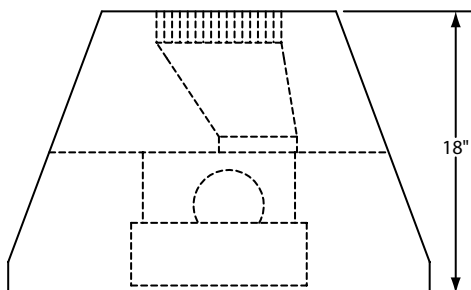

**Transition Installed
(Side View)**

Recommended Mounting Height*

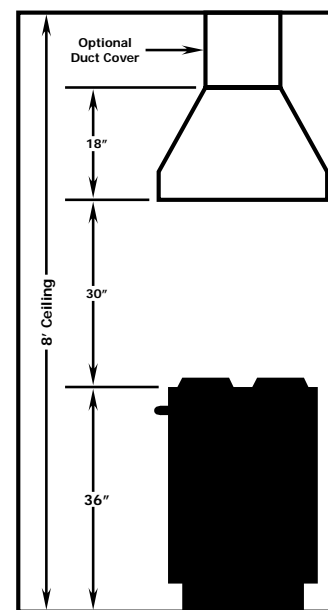

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (one in front, one in back) or with halogen lights (one in each corner).


Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B

VentAHead® EUROSTYLE ISLAND RANGE HOOD SPECIFICATIONS


EPI18/EPIH18/SEPI18/SEPIH18 "H" in part number indicates halogen lighting. These models not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes.

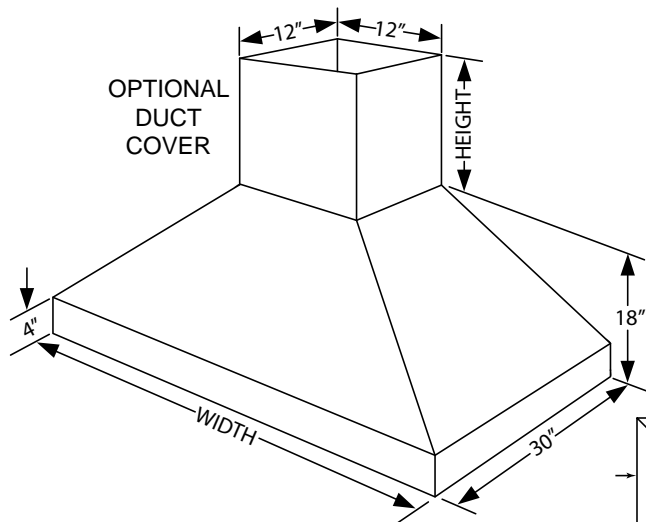


EPI18/EPIH18

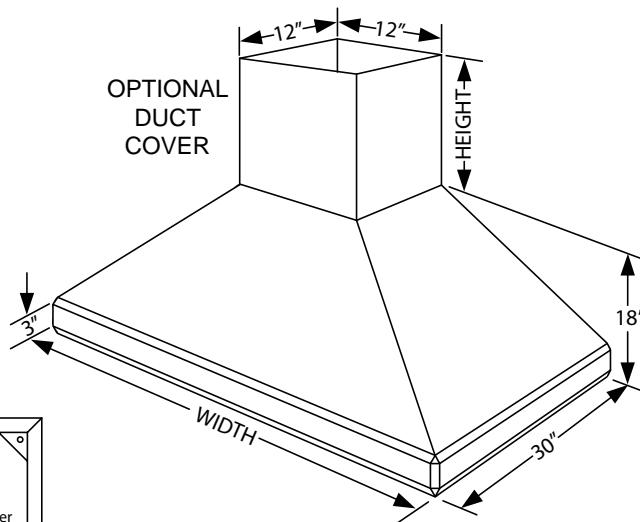

SEPI18/SEPIH18




Connection Diagram (36" - 48" Widths)

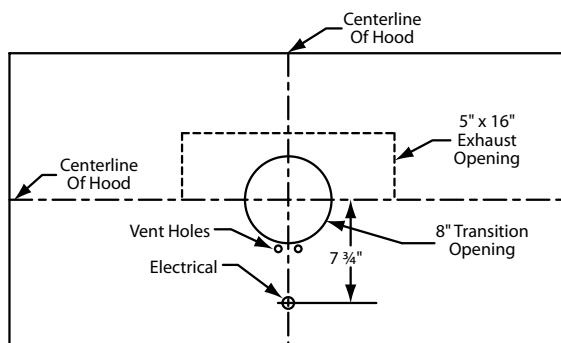


550 CFM T200 Dual Blower (Top View)


Recommended Mounting Height*

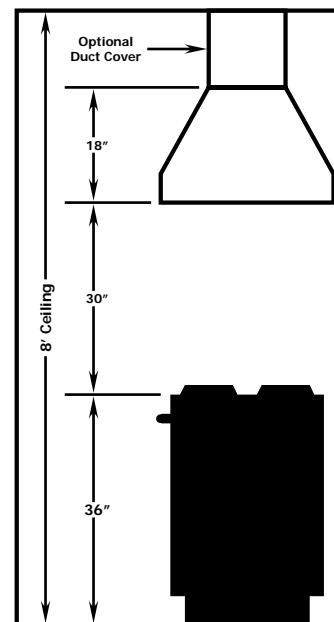

*Exceeding recommended mounting height may compromise performance.

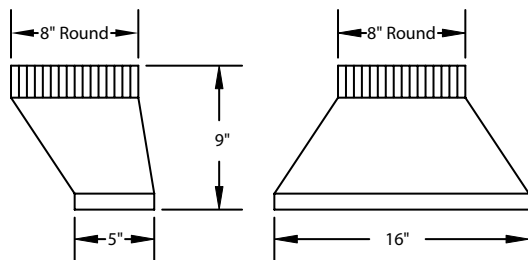

VP565 Standard Transition (Included)

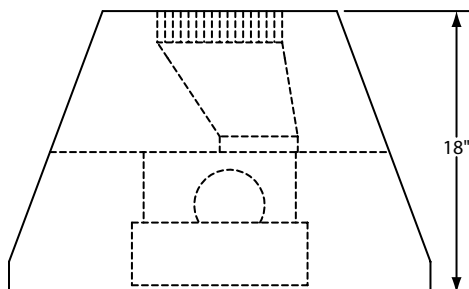

Transition Installed (Side View)

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (one in front, one in back) or with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B




VentA-Hood® EUROSTYLE ISLAND RANGE HOOD SPECIFICATIONS


EPIT18/EPITH18/SEPIT18/SEPITH18 "H" in part number indicates halogen lighting. These models not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes.

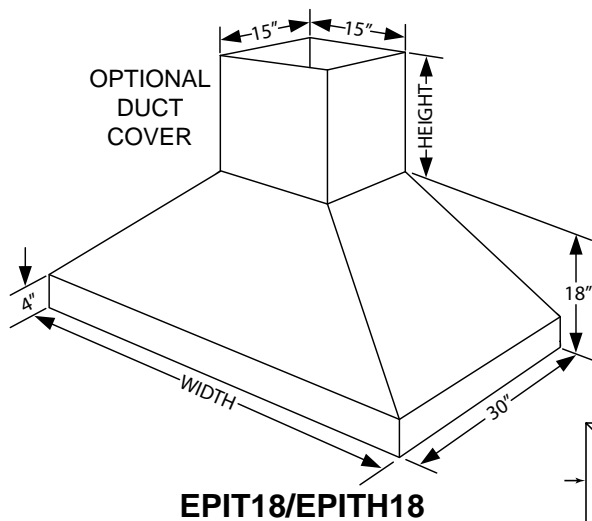


EPIT18/EPITH18

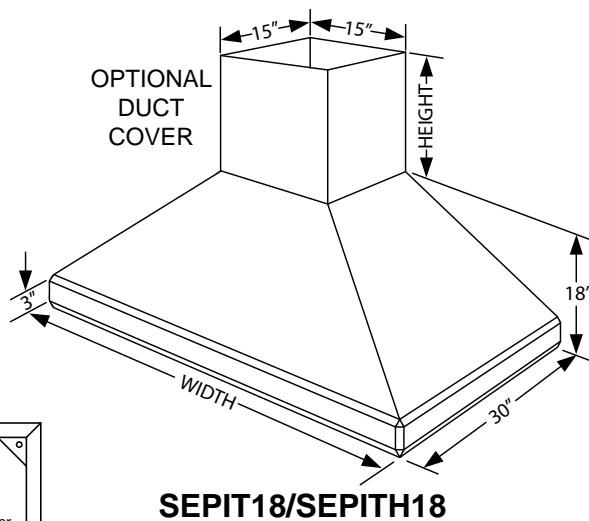


SEPIT18/SEPITH18




Connection Diagram (48" - 66" Widths)

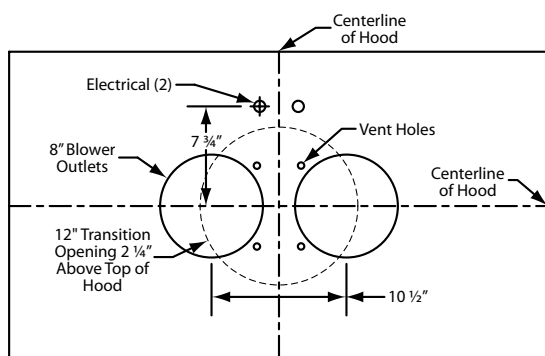

1100 CFM T400 Cluster Blower (Top View)

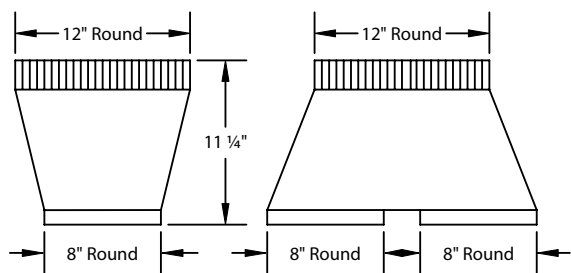


VP564 Standard Transition (Included)

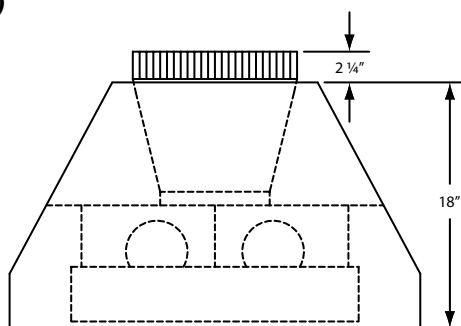

Transition Installed (Side View)

Recommended Mounting Height*

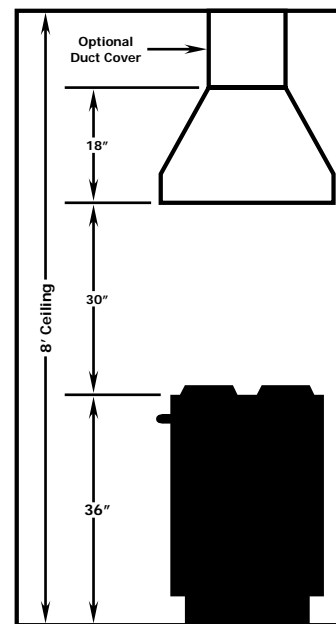

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T400 Island Cluster	115	5.8	60	1550	1100	1800	998	855	774	12" (13 in. ²)	6.4

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (two in front, two in back) or with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B






Vent Hood®

**CONTEMPORARY
ISLAND**


SUBJECT TO CHANGE WITHOUT NOTICE

VentA-Hood® ISLAND RANGE HOOD SPECIFICATIONS


CIEH9 Equipped with halogen lighting. These models not available with heat lamps. Shown with optional duct cover(s) (sold separately). Optional duct covers available in standard and custom sizes.

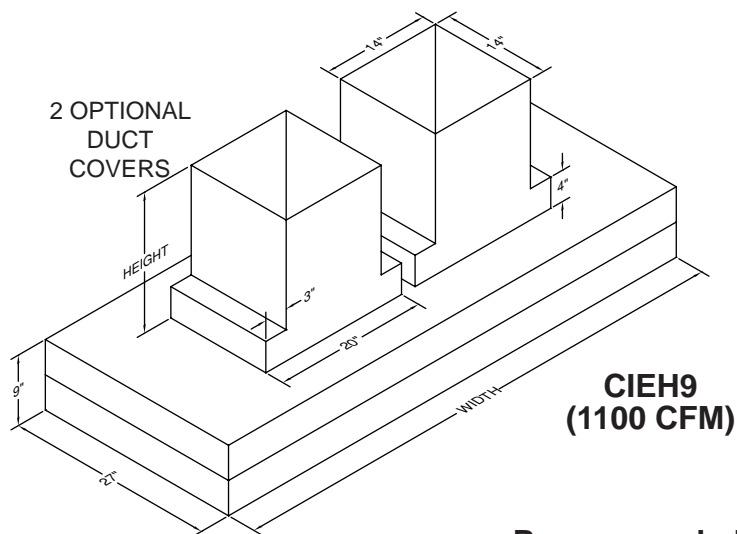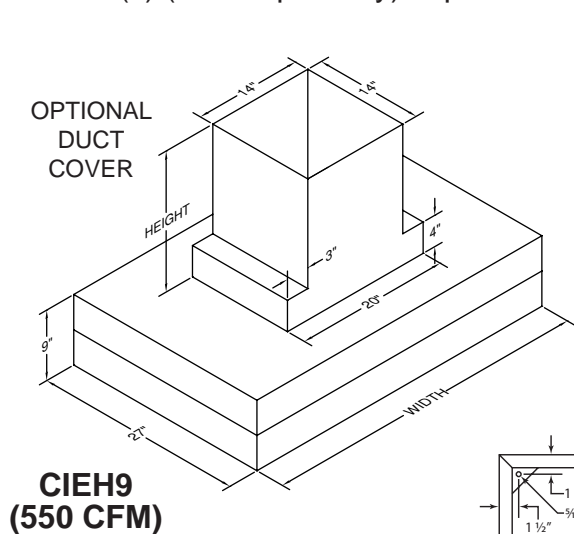


Connection Diagram (36" - 54" Widths)

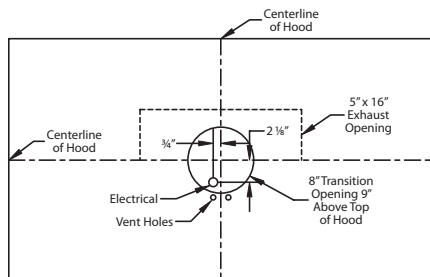

550 CFM T200 Dual Blower (Top View)

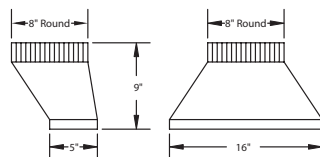


VP565 Transition (Included)

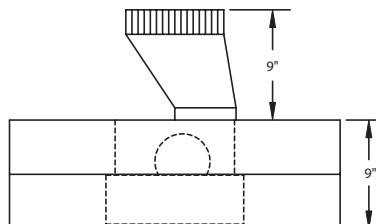


Transition Installed (Side View)

Recommended Mounting Height*

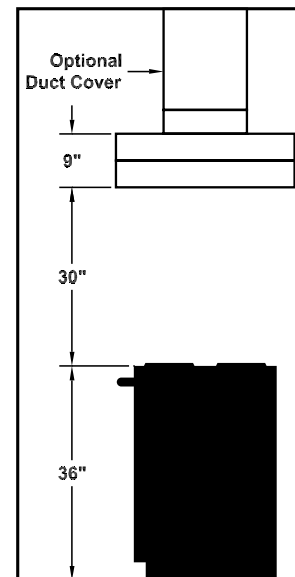


*Exceeding recommended mounting height may compromise performance.


Connection Diagram (60" - 66" Widths)

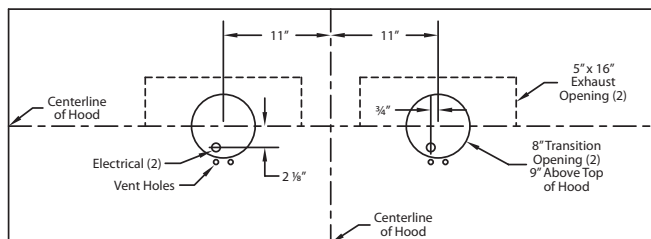

1100 CFM T2+200 Dual Blower (Top View)

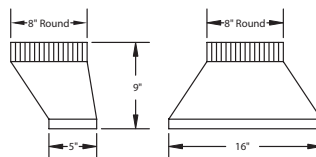

VP565 Transition (2 Included)

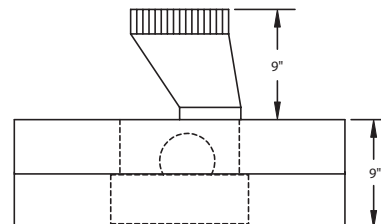

Transition Installed (Side View)

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 1009A




Vent-A-Hood® ISLAND RANGE HOOD SPECIFICATIONS


CILH9 Equipped with halogen lighting. These models not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes. Galley rail included.

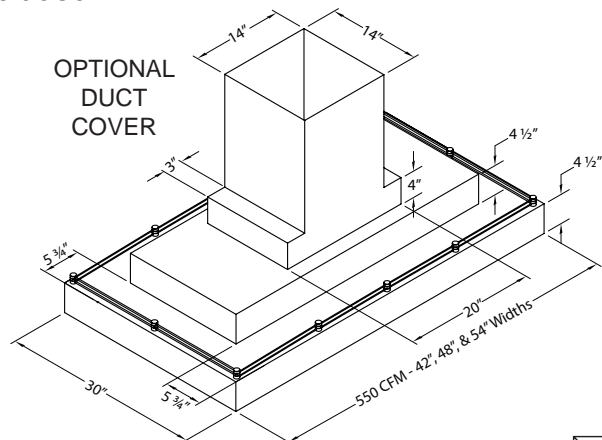


CILH9 (550 CFM)

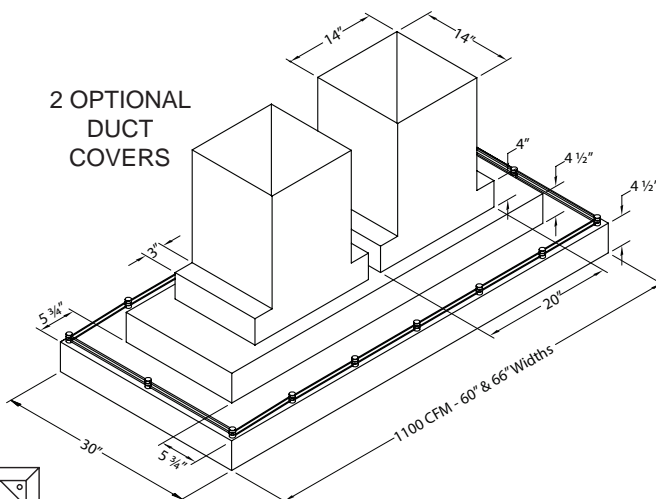


CILH9 (1100 CFM)




Connection Diagram (42" - 54" Widths)

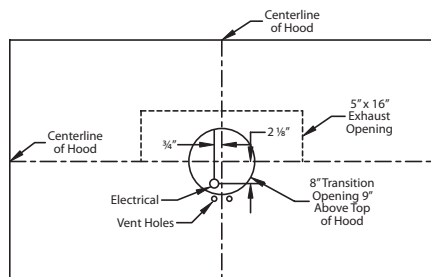

**550 CFM T200 Dual Blower
(Top View)**

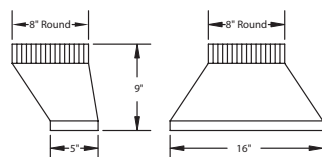


**VP565 Transition
(Included)**

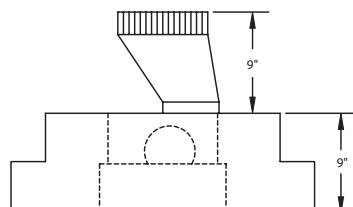


**Transition Installed
(Side View)**

Recommended Mounting Height*

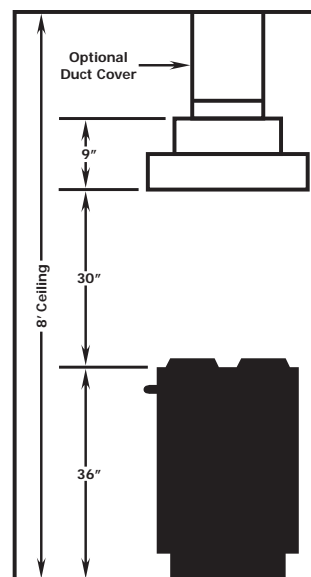


*Exceeding recommended mounting height may compromise performance.


Connection Diagram (60" - 66" Widths)

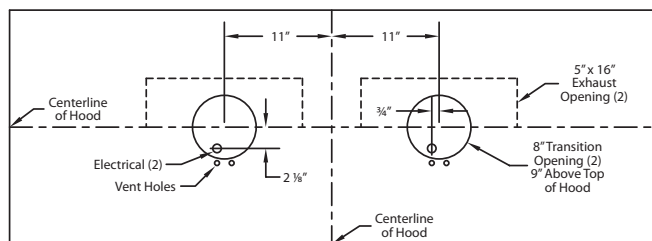

**1100 CFM T2+200 Dual Blower
(Top View)**

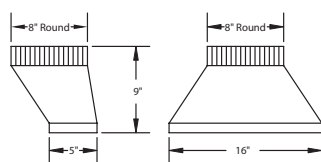

**VP565 Transition
(2 Included)**

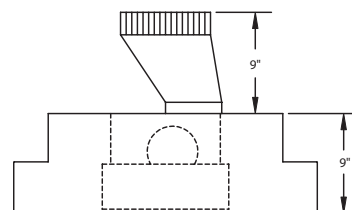

**Transition Installed
(Side View)**

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0908A




Vent-A-Hood® ISLAND RANGE HOOD SPECIFICATIONS


IZTH Equipped with halogen lighting. These models not available with heat lamps. Only available in stainless steel. Shown with optional duct cover (sold separately). Optional duct covers available in standard and custom sizes. Pot rail included.

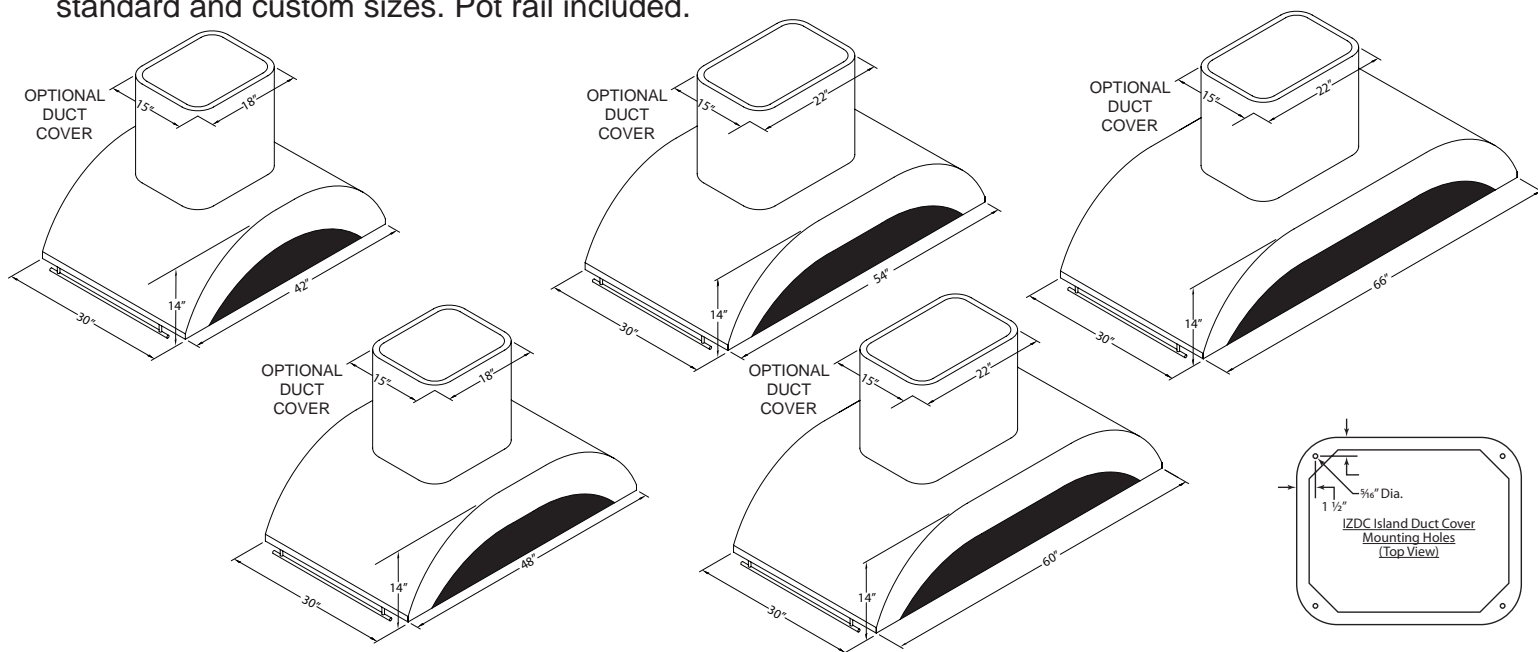


Connection Diagram (42\" - 48\" Widths)

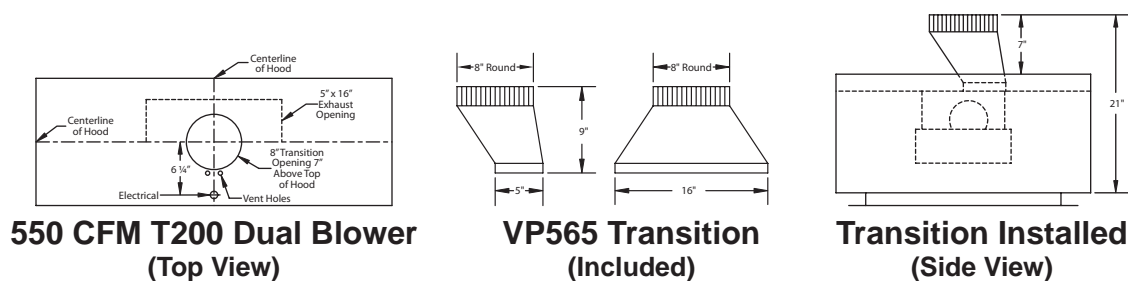

Connection Diagram (54\" - 66\" Widths)

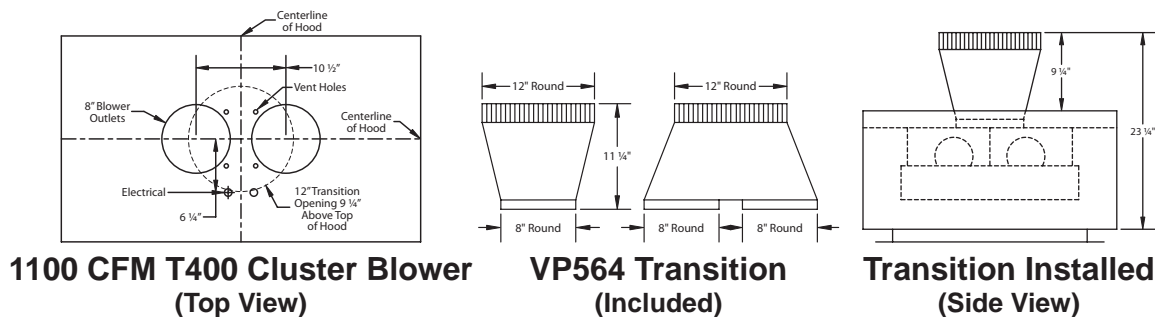

Recommended Mounting Height*

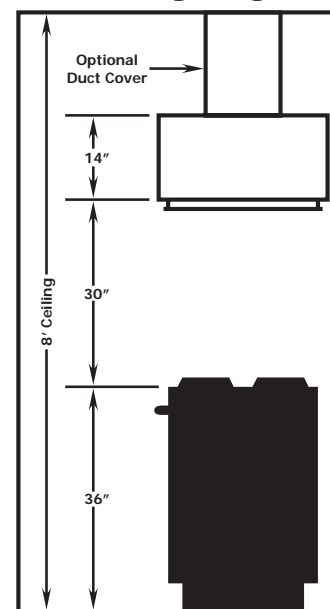

***Exceeding recommended mounting height may compromise performance.**

NOTE: DUCT COVER EXTENDS 2\" INTO TOP OF HOOD.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0
T400 Island Cluster	115	5.8	60	1550	1100	1800	998	855	774	12" (113 in. ²)	6.4

* Add 0.5 amp for each halogen light. Hood is available with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808C


Vent Hood®

WALL MOUNT LINER

SUBJECT TO CHANGE WITHOUT NOTICE

Vent-A-Hood® WALL MOUNT LINER INSERT SPECIFICATIONS


KHSLD LINER Halogen lights only. This model not available with heat lamps. This model only available in Black, Biscuit, Gunsmoke Gray, Stainless Steel, or White.

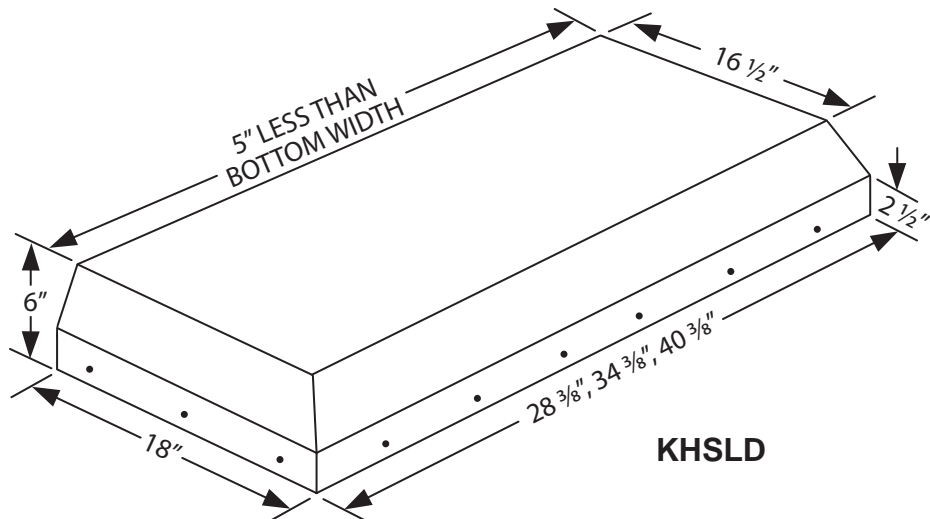



KHSLD

Top Vent or Back Vent
3 1/4" x 10"


The VP521 transition is available for top vent applications at an additional charge.

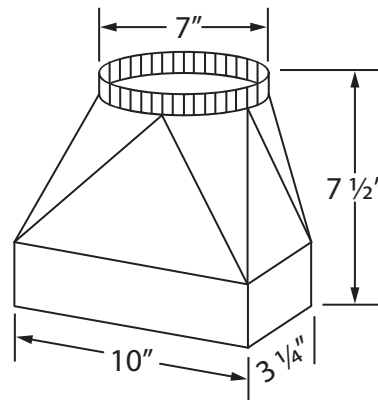

Connection Diagrams (28 3/8", 34 3/8", & 40 3/8" Widths)

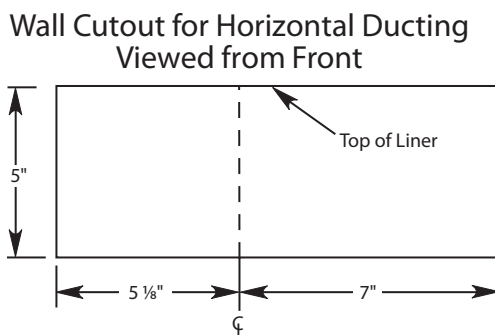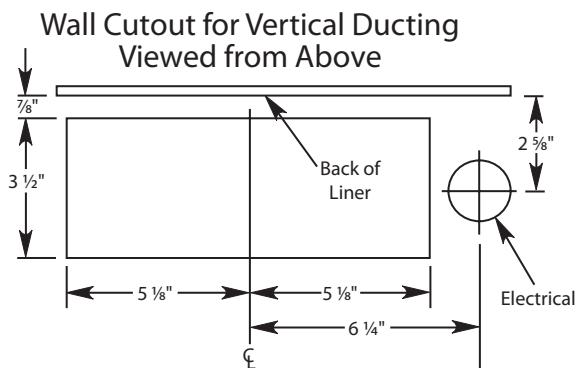

Recommended Mounting Height*

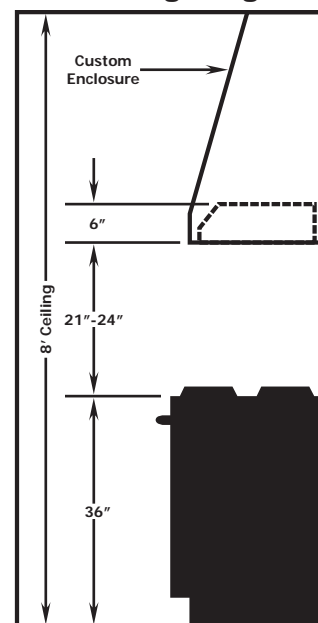

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
K250 (Top Vent)	115	3.2	60	1550	250	375	223	220	190	7" (38 in. ²)	7.4
K250 (Back Vent)	115	3.2	60	1550	220	330	215	195	180	7" (38 in. ²)	7.4

All K-Series hoods have two halogen lights.

* Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".


Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0909A




VentA-Hood® WALL MOUNT LINER INSERT SPECIFICATIONS

BSLD/BHSLD LINER "H" in part number indicates halogen lighting. This model not available with heat lamps.

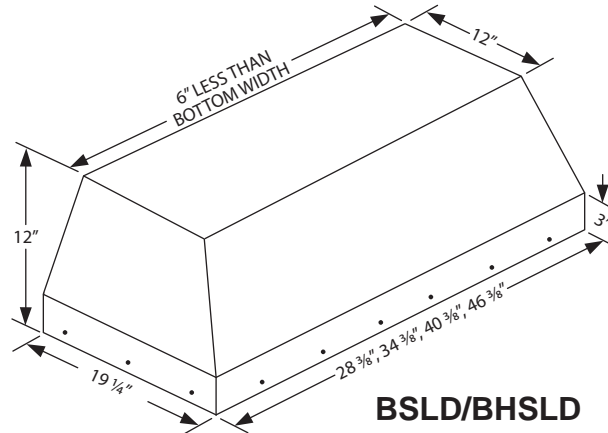


Connection Diagram (28 3/8" - 40 3/8" Widths)

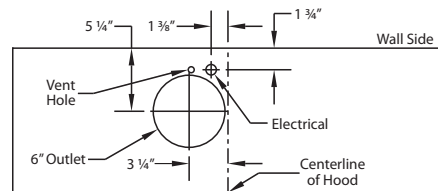


300 CFM B100 Single Blower
(Top View)

Connection Diagram (28 3/8" - 46 3/8" Widths)

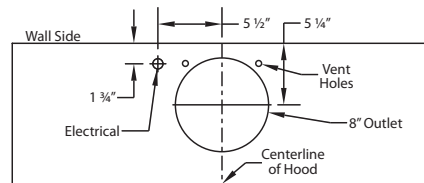


600 CFM B200 Dual Blower
(Top View)


Connection Diagram (46 3/8" Width)

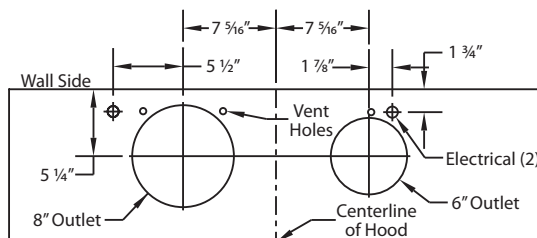

900 CFM B200 Dual & B100 Single Blower
(Top View)

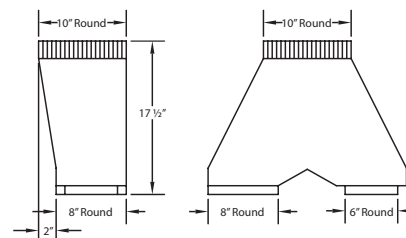


VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)

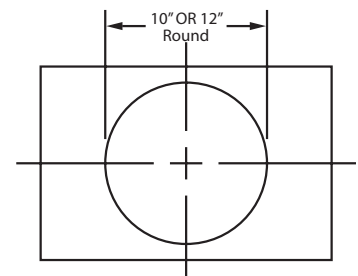

VP562/VP563 transition
centers outlet
over top of hood

Recommended Mounting Height*

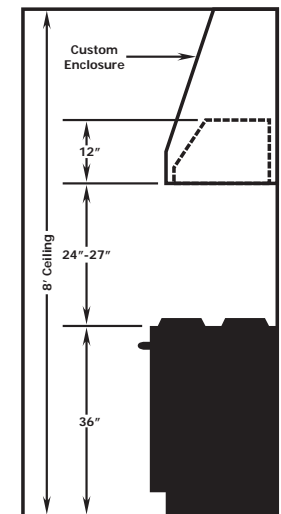

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units


Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B100 Single	115	1.5	60	1550	300	450	273	245	225	6" (28 in. ²)	5.4
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3

* Add 0.5 amp for each halogen light. Hoods are available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 48").
 # Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".
 # Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0609A

VentA-Hood® WALL MOUNT LINER INSERT SPECIFICATIONS

BPSLD/BHPSLD LINER "H" in part number indicates halogen lighting. This model not available with heat lamps.

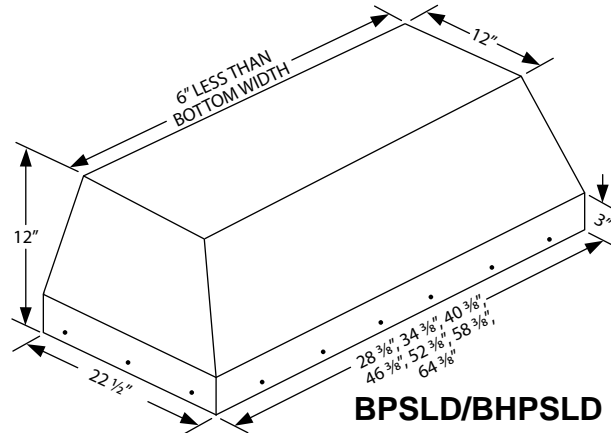


Connection Diagram (28 3/8" - 52 3/8" Widths)

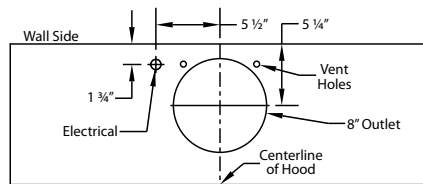


600 CFM B200 Dual Blower
(Top View)

Connection Diagram (46 3/8" - 58 3/8" Widths)

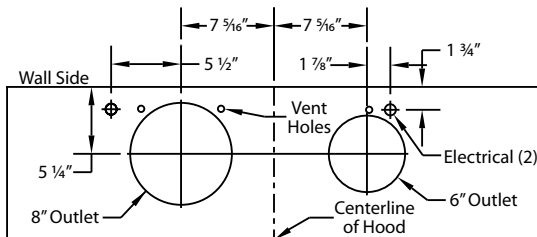


900 CFM B200 Dual & B100 Single Blower
(Top View)

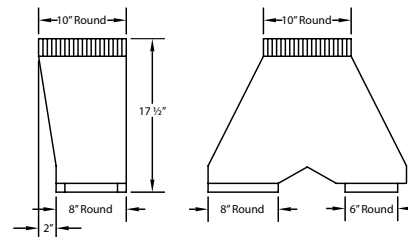


VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)

Recommended Mounting Height*

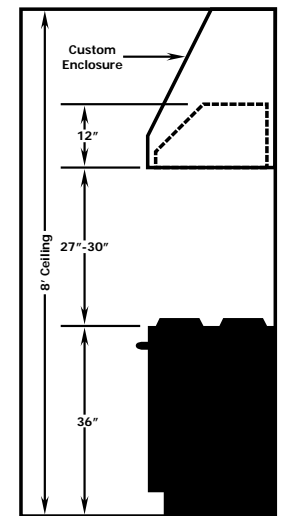


*Exceeding recommended mounting height may compromise performance.


Connection Diagram (52 3/8" - 64 3/8" Widths)

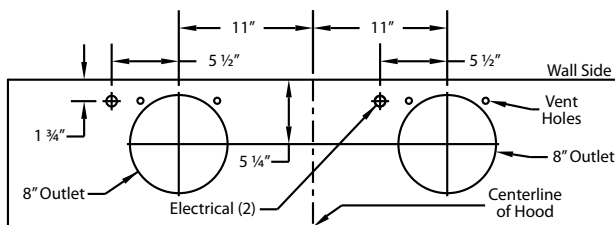

1200 CFM Double B200 Dual Blowers
(Top View)

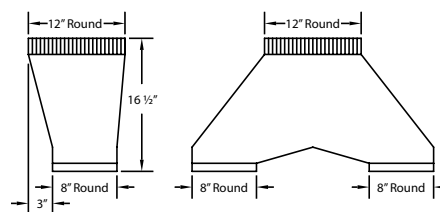

VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)

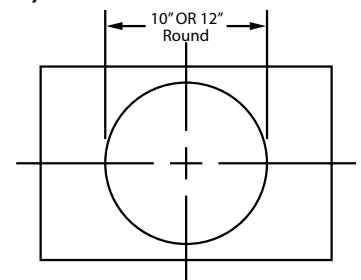

VP562/VP563 transition
centers outlet
over top of hood

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B200 Dual	115	2.9	60	1550	600	900	531	480	430	8" (50 in. ²)	6.5
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6

* Add 0.5 amp for each halogen light. Hoods are available with fluorescent light (one for each single or dual blower) or with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66").


Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808A


VentA Hood® WALL MOUNT LINER INSERT SPECIFICATIONS

BH340PSLB/B446PSLB/BH446PSLB LINER "H" in model number designates halogen lighting. BH340PSLB is available with halogen lights only. This model not available with heat lamps.

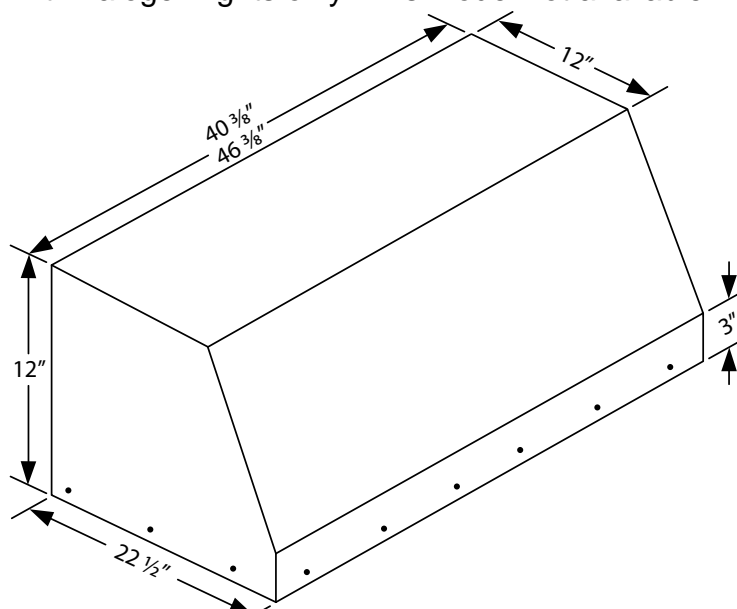


BH340PSLB/B446PSLB/BH446PSLB

Connection Diagram (40-3/8" Width)

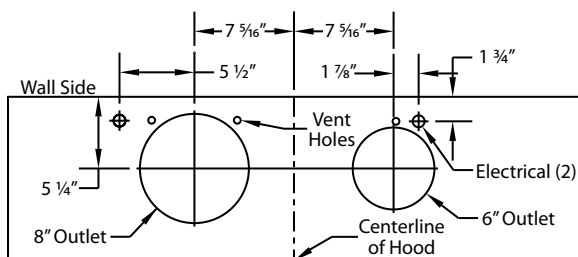


900 CFM B200 Dual & B100 Single Blowers (Top View)

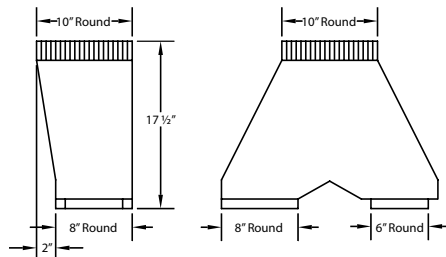


VP562 Transition (Optional) For B300 (B200 Dual & B100 Single Blowers)

Connection Diagram (46-3/8" Width)

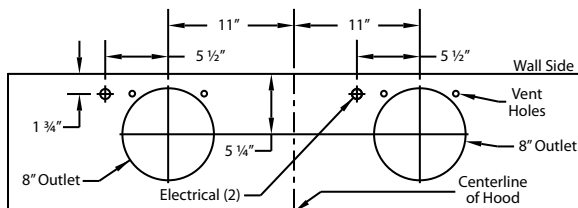


1200 CFM Double B200 Dual Blowers (Top View)

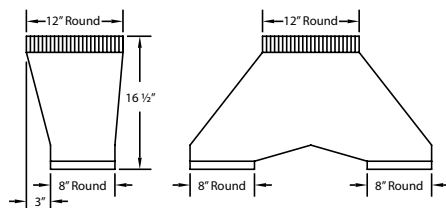


VP563 Transition (Optional) For B400 (Double B200 Dual Blowers)

Recommended Mounting Height*

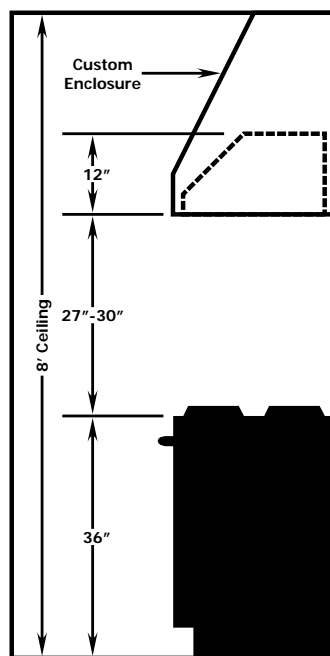

*Exceeding recommended mounting height may compromise performance.

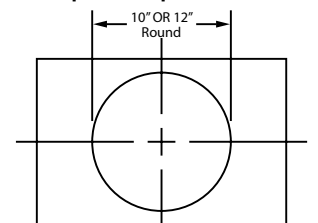

Transition centers outlet over top of hood

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
B200 Dual & B100 Single	115	4.4	60	1550	900	1350	804	725	655	VP562: 10" (79 in. ²)	6.3
Two B200 Duals	115	5.8	60	1550	1200	1800	1062	960	860	VP563: 12" (113 in. ²)	6.6

* Add 0.5 amp for each halogen light. The B446PSLB is available with two fluorescent lights. Both models are available with three halogen lights.

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808A




Vent Hood®

ISLAND LINER

SUBJECT TO CHANGE WITHOUT NOTICE


VentA-Hood® ISLAND LINER INSERT SPECIFICATIONS

TSLE/THSLE “H” in part number indicates halogen lighting. This model not available with heat lamps.

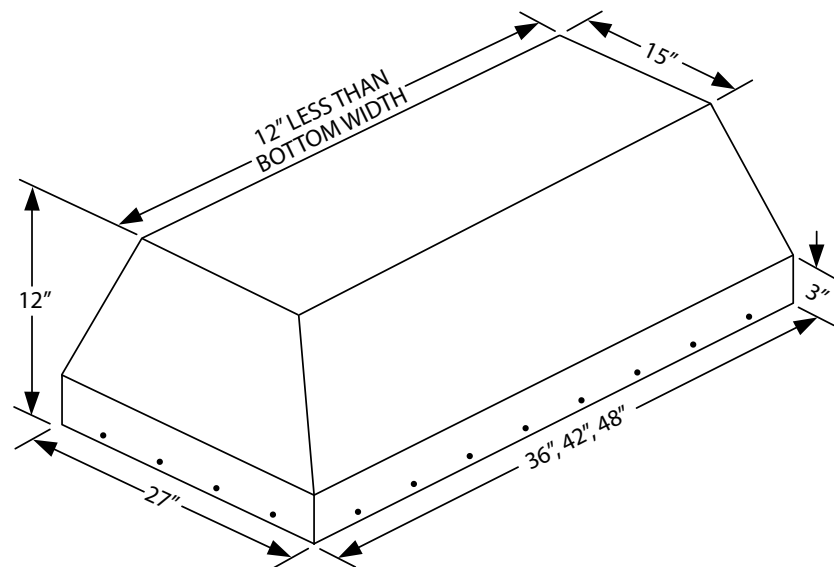


TSLE/THSLE


Connection Diagram (36" - 48" Widths)

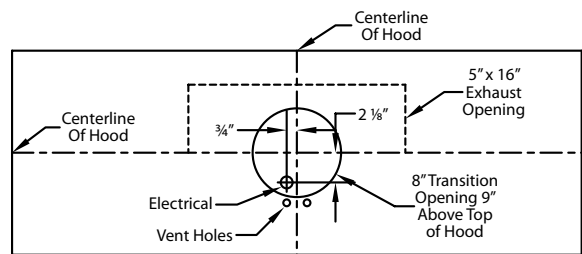

550 CFM T200 Dual Blower
(Top View)

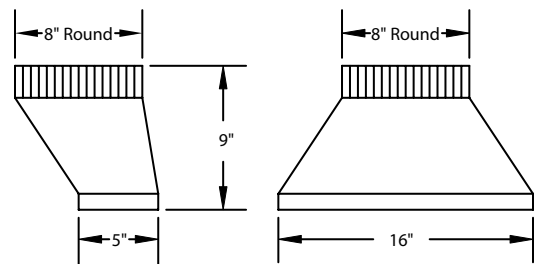


VP565 Standard Transition
(Included)

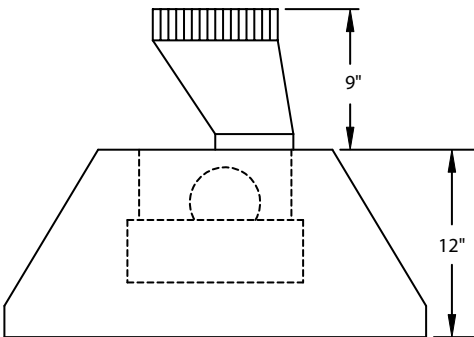

Transition Installed
(Side View)

Recommended
Mounting Height*

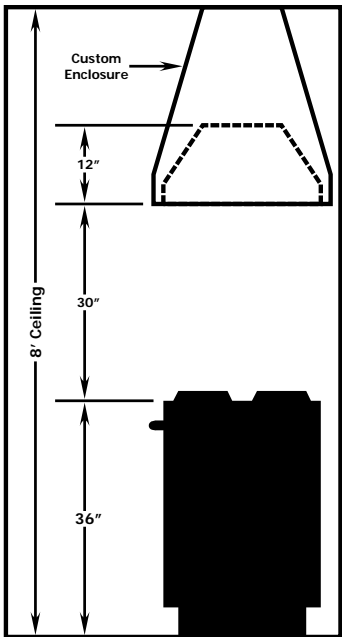

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units


Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T200 Island Dual	115	2.9	60	1550	550	900	507	471	431	8" (50 in. ²)	6.0

* Add 0.5 amp for each halogen light. Hood is available with fluorescent lights (one in front, one in back) or with halogen lights (one in each corner).
Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".
Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.




VentA-Hood® ISLAND LINER INSERT SPECIFICATIONS

TPSLE/THPSLE "H" in part number indicates halogen lighting. This model not available with heat lamps.

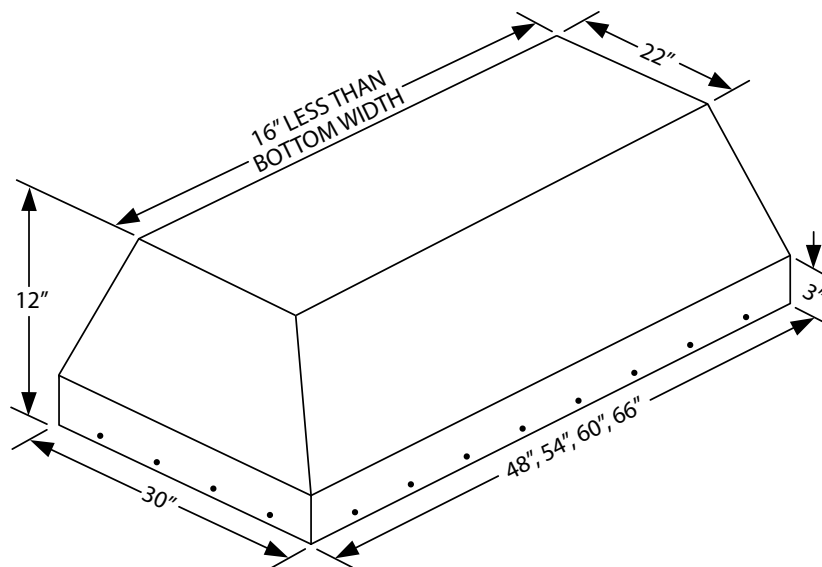


TPSLE/THPSLE


Connection Diagram (48" - 66" Widths)

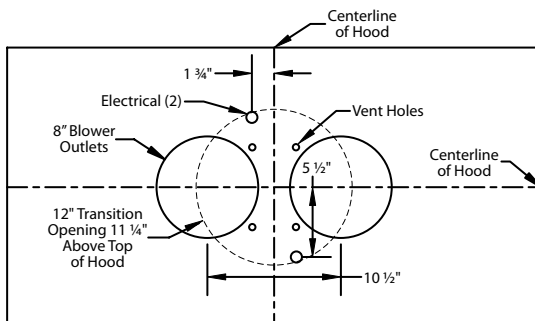

1100 CFM T400 Cluster Blower
(Top View)

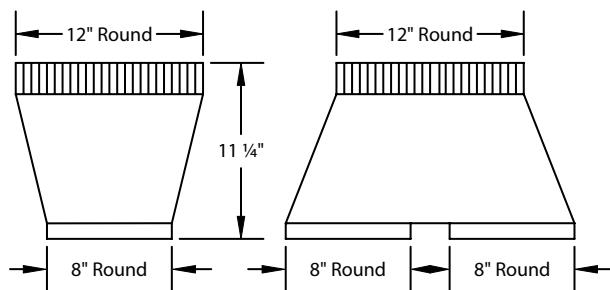


VP564 Standard Transition
(Included)

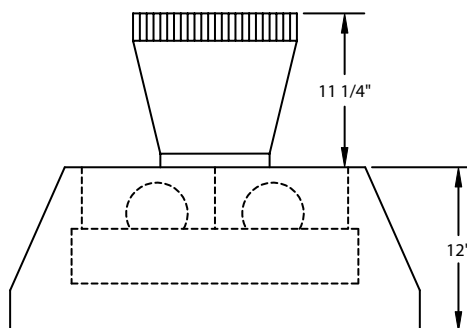

Transition Installed
(Side View)

Recommended Mounting Height*

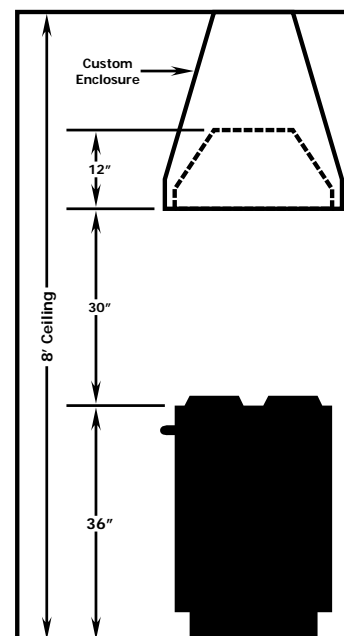

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM*	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
T400 Island Cluster	115	5.8	60	1550	1100	1800	998	855	774	12" (13 in. ²)	6.4

* Add 0.5 amp for each halogen bulb. Hood is available with fluorescent lights (two for each dual blower) or with halogen lights (one in each corner).

Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0808B