

# OPEN TOP PREP. TABLES

Back Mounted Condensing Unit



**EOTP – Series** • EOTP1 • EOTPS2 • EOTP2 • EOTPW2 • EOTP3



EOTP1



EOTPS2



EOTP2



EOTPW2



EOTP3

### Cabinet Construction

Heavy duty stainless steel interior and exterior, galvanized steel finished bottom and back wall of exterior. High quality 16 gauge stainless steel worktop and top lids. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

### Refrigeration System

- Back mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature recovery
- Slide-out condensing unit for convenient repair and maintenance
- Front air breathing for built-in applications
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief port for rapid cabinet re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

### Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick foamed-in-place polyurethane insulation
- Rounded corners for a sleek and modern appearance
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gasket for easy replacement
- Heavy duty recessed door handles for a flat surface

### Preparation Area

- Mega-top, three rows of 1/6 sized pans
- Removable top cover(s), 1/2" thick foam insulated cover(s) to prevent moisture build-up and heat exchange
- Sanitary polycarbonate pans with lids

### Shelving

- One epoxy coated wire shelf per section
- Stainless steel pilasters and shelf clips

### Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat

### Option

- 9 1/8" deep cutting board

• Project / Customer \_\_\_\_\_

• Item No. \_\_\_\_\_

• Model No. \_\_\_\_\_



### Warranty



**5 Year — Compressor Warranty**  
**3 Year — Parts & Labor Warranty**  
 Applicable to units purchased after July 1, 2014.

### Contact



201 W. Artesia Blvd, Compton, CA 90220  
 T. (310) 323-6586, (800) 444-6285  
 F. (310) 323-7524, (310) 761-1127



# OPEN TOP PREP. TABLES

## Back Mounted Condensing Unit




**EOTP – Series** • EOTP1 • EOTPS2 • EOTP2 • EOTPW2 • EOTP3


### Dimensions

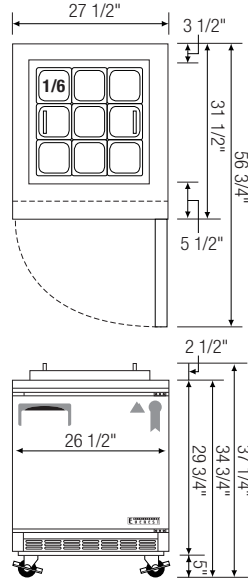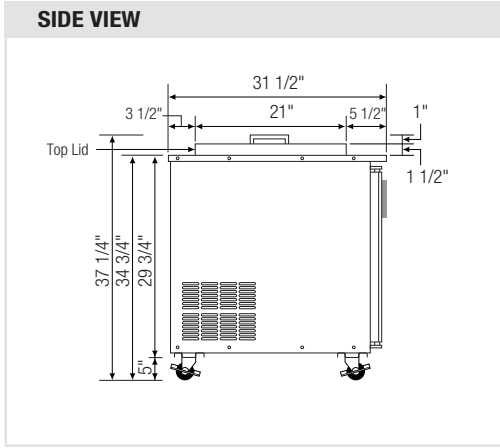


▲ EOTP1

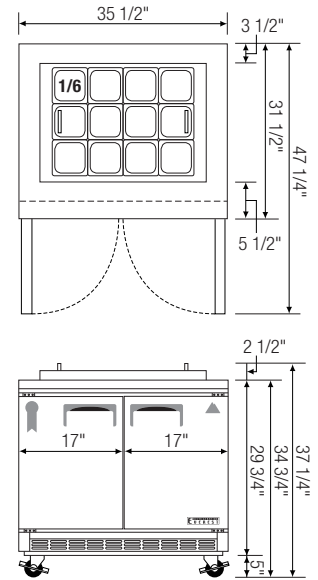


▲ EOTPS2

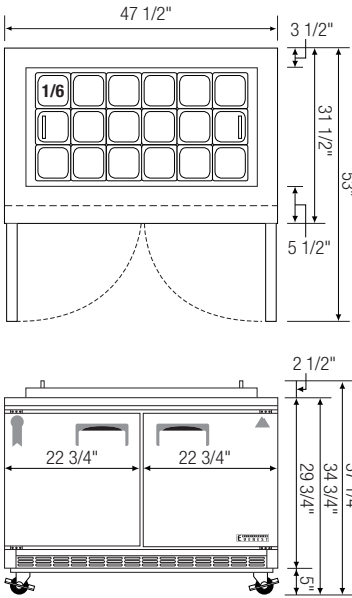

▲ EOTP2

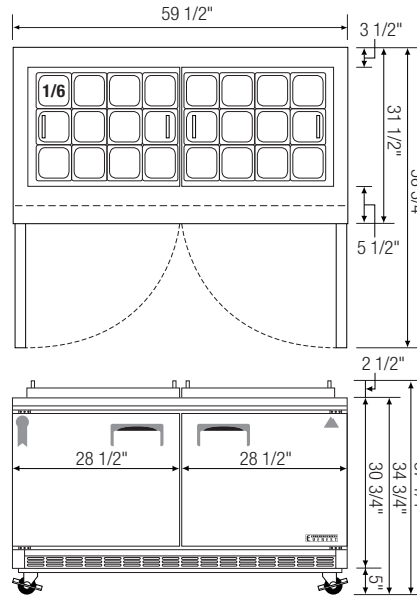

▲ EOTPW2

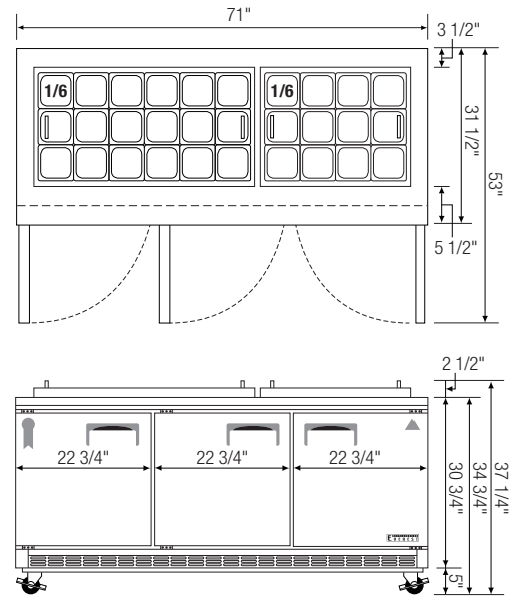

▲ EOTP3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	# of Top Covers	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			* Height does not include 5" for casters; height includes top lid and handle  Ref = Refrigerator Frz = Freezer Dual = Ref & Frz Combo
												L	D	H *	
EOTP1	Ref	1	6.5	1/6	R-134A	1	1	1/6 X 9	115-60-1	4.00	203	27 1/2	31 1/2	32 1/4	
EOTPS2	Ref	2	8.5	1/6	R-134A	2	1	1/6 X 12	115-60-1	4.20	247	35 1/2	31 1/2	32 1/4	
EOTP2	Ref	2	11.8	1/4	R-134A	2	1	1/6 X 18	115-60-1	4.20	302	47 1/2	31 1/2	32 1/4	
EOTPW2	Ref	2	15	1/3	R-134A	2	2	1/6 X 24	115-60-1	5.01	354	59 1/2	31 1/2	32 1/4	
EOTP3	Ref	3	18.3	1/3	R-134A	3	2	1/6 X 30	115-60-1	5.20	407	71	31 1/2	32 1/4	

**Disclaimer:** Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.