


BOTTOM MOUNT REACH-IN DUAL TEMPS

Bottom Mounted Condensing Unit

EB – Series • EBWRFH2 • EBSRF2 • EBRF2 • EBRF2D • EBRF3



▲ EBWRFH2



▲ EBSRF2



▲ EBRF2



▲ EBRF2D
(Deep Series)



▲ EBRF3

Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain covers. 2.5" thick high density foamed-in-place polyurethane insulation. Four or six 4" diameter casters (front casters with brakes) with additional front weight support legs. Door heater installed around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Bottom mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-134A and R-404A refrigerant
- Adjustable, time-initiated defrost cycle of 3 to 12 hours with 350 watt defrost heater, both time and temperature terminated for fail-safe operation
- Automatic evaporator fan motor delay after defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan with wicking pads for self sufficient condensation removal
- Pressure relief ports for rapid re-entry
- Interior airflow backward to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Lighting

- Shielded incandescent interior lighting

Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles for a flat surface
- Door locks
- Field reversible doors

Shelving

- Epoxy coated wire shelves (*see next page for shelf quantity*)
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F for refrigerators and -4°F for freezers
- Temperature setting range from 33°F to 54°F for refrigerators and -10°F to 54°F for freezers
- Easy to read digital temperature display
- Easy to program push-button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature



Dimensions

ABS Legs



Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing door, and three additional legs for EBRF3 for weight support.

✓: Vacuum Relief Mechanism




The vacuum relief valve equalizes cabinet pressure for rapid door re-entry.




Equipped with 9 ft long NEMA 5-15P plug.

Side View

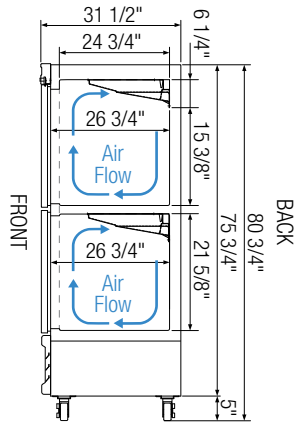


EBWRFH2

Side View


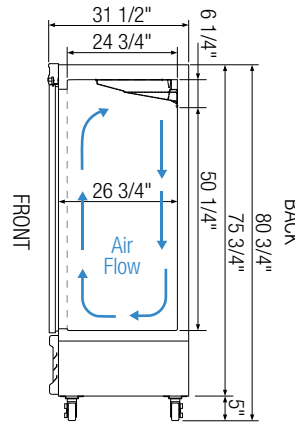


EBSRF2, EBRF2, EBRF3

Side View

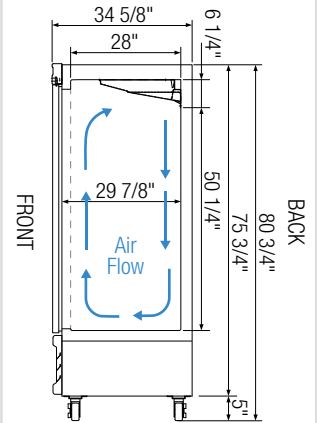

EBRF2D

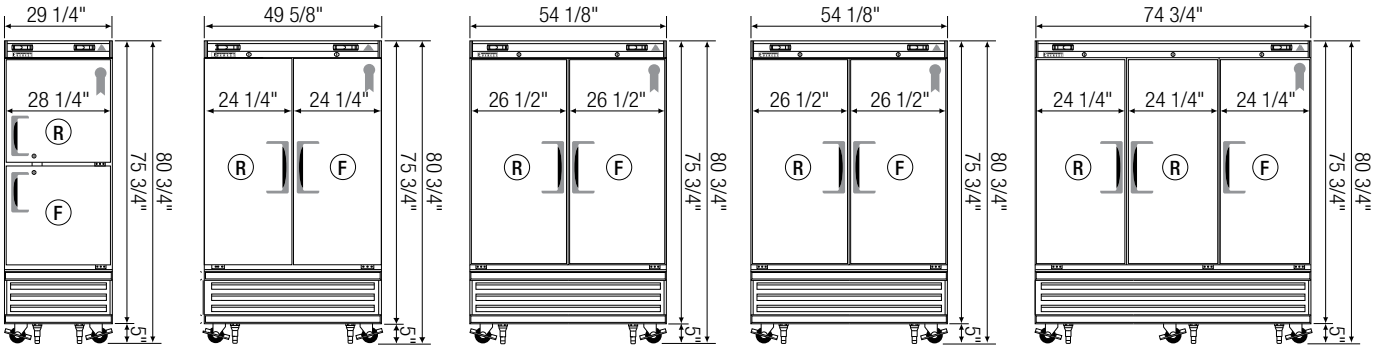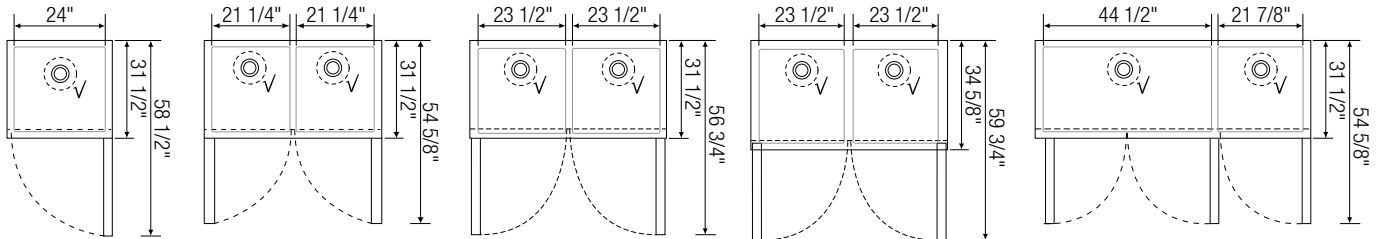

▲ EBWRFH2

▲ EBSRF2

▲ EBRF2

▲ EBRF2D
(Deep Series)

▲ EBRF3

| Model | Ref/ Frz/ Dual | # of Doors | Capacity (Cu.Ft.) [†] | HP | BTU/HR [†] | Refrigerant | # of Shelves | Power (V-Hz-Ph) | Amps | Crated Weight (LBS) | Exterior Dimensions (Inches) | | |
|---------|----------------------|---------------|-----------------------------------|---------------------|------------------------|--------------------------|-----------------|--------------------|-------|---------------------------|---------------------------------|--------|--------|
| | | | | | | | | | | | L | D | H* |
| EBWRFH2 | Dual | 2(H) | 9.64 (R) 9.64 (F) | 1/2 | 3,435 | R-404A | 2 | 115-60-1 | 7.59 | 341 | 29 1/4 | 31 1/2 | 75 3/4 |
| EBSRF2 | Dual | 2 | 18.59 (R) 18.59 (F) | 1/4+ (R) 1/2 (F) | 1,672 (R) 3,435 (F) | R-134A (R) R-404A (F) | 6 | 115-60-1 | 10.27 | TBA | 49 5/8 | 31 1/2 | 75 3/4 |
| EBRF2 | Dual | 2 | 20.55 (R) 20.55 (F) | 1/4+ (R) 1/2 (F) | 1,672 (R) 3,435 (F) | R-134A (R) R-404A (F) | 6 | 115-60-1 | 10.87 | 546 | 54 1/8 | 31 1/2 | 75 3/4 |
| EBRF2D | Dual | 2 | 22.96 (R) 22.96 (F) | 1/3 (R) 1/2 (F) | 2,041 (R) 3,436 (F) | R-134A (R) R-404A (F) | 6 | 115-60-1 | 10.87 | 573 | 54 1/8 | 31 1/2 | 75 3/4 |
| EBRF3 | Dual | 3 | 38.92 (R) 19.14 (F) | 1/3+ (R) 1/2 (F) | 2,612 (R) 3,435 (F) | R-134A (R) R-404A (F) | 9 | 115-60-1 | 14.06 | 631 | 74 3/4 | 31 1/2 | 75 3/4 |

* : Height does not include 5" for casters.

† : Based on evaporating temperature of 14°F (-10°C) & condensing temperature of 131°F (55°C).

(R) = Refrigerator | (F) = Freezer
Dual = Ref & Frz Combo | (H) = Half Door

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(†) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.