

# JG-246UL BUILT-IN GRIDDLE

JG-246UL BUILT-IN GRIDDLE



Wells JG-246UL Built-In Griddle is essential for any kitchen preparing “Teppan” style dishes. The recessed griddle plate has a 20” x 24” high temperature (up to 550°F) cooking area that is ideal for stir-frying.

## Specifications

Overall Dimensions:	Inches	MM
Width	49 3/16	1249
Depth	29 11/16	754
Griddle Surface Dimensions:		
Width	46 13/16	1189
Depth	27 5/16	694
Area	1279 in <sup>2</sup>	.83 m <sup>2</sup>
Griddle Cooking Area:		
Width	24	610
Depth	20	508
Area	480	.31 m <sup>2</sup>
Temperature Range:	Fahrenheit	Celsius
JG-246UL	150° to 550°	65° to 288°
Number of Thermostats:	1	
Weights:	Lbs.	KG
Installed	335	152
Shipping	375	170

## Features

- **Lower temperature on outer griddle surface** allows it to be used for holding food.
- **UL evaluated** for installation into wood or metal countertops. (See required clearances)
- **3/4" thick griddle plate** provides better heat distribution and retention in center cooking area.
- **Control** is recessed in a one-piece, drawn, remote stainless steel panel to help prevent accidental temperature changes.
- An **adjustable thermostat** controls temperature, with a signal light that cycles off when desired temperature is reached.
- **Flattened tubular elements** are clamped beneath the front center cooking area, providing fast heat-up and even heat distribution.
- **On/Off switch** is provided with a signal light that indicates a power-on condition.
- A **terminal block** is provided for field wiring connection to the main power supply.
- **The JG-246UL Griddle** is Underwriters Laboratories, Inc. LISTED and meets NSF International and Canadian standards.
- A **one-year warranty** against defects covers parts and labor.





LISTED  
E6070



STD.4




E6070

## MODEL JG-246UL BUILT-IN GRIDDLE

**DIMENSIONS:**      INCH  
                                    (MM)

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT*
$2 \frac{1}{4}$	$2 \frac{1}{4}$	3	$4 \frac{1}{4}$
(57)	(57)	(76)	(108)

\* When control box is located below the unit, front clearance can be 2 1/4 inches.

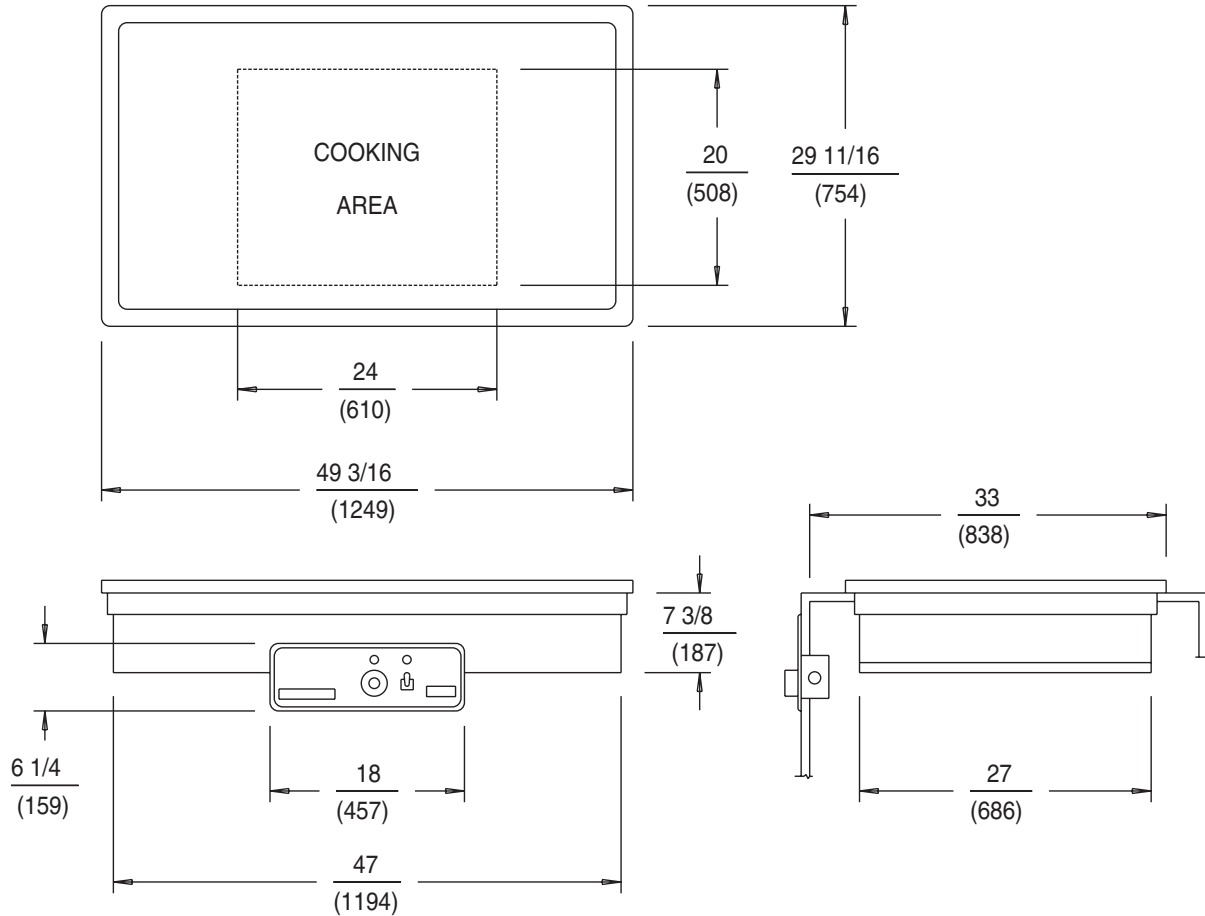

### JG-246UL ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE 3 PHASE			AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3		
JG-246UL	208	6000	14.4	14.4	25.0	28.9	NONE
JG-246UL	240	8000	16.7	16.7	28.9	33.3	NONE

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.

WELLS MANUFACTURING COMPANY  
2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A.  
USA PHONE: (775) 689-5700 • FAX: (775) 689-5972  
FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142  
www.wells-mfg.com  
© 2002 WELLS MANUFACTURING • PRINTED IN THE U.S.A.  
01/02 • REV(B) • PART NO. 300251

