



Chemical Sanitizing Single Rack Dishwasher



- 40 racks / 160 covers per hour.
- Economical to operate. Uses only 1.25 gallons of water per cycle.
- All heavy duty 304 stainless steel construction assures long life and years of trouble free operation.
- Top mounted controls include built-in chemical pumps and deliming system that assures proper chemical usage.
- Power Drain saves space, eliminates noisy solenoid and external sump. Drains quickly.
- Available for straight or corner applications.
- Integrated scrap tray prevents food soil from entering drain system.
- Auto start/stop makes operation safe and easy.
- Unique sanitizing system provides instant sanitation and eliminates chlorine damage to the machine.












CORNER MODEL

Power drain saves space, eliminates noisy solenoid and external sump. Drains quickly.



Self cleaning pump screen eliminates operator error. Saves service calls



Unique sanitizing system sanitizer injector is located close to pump, allowing sanitizing to take place immediately. Strategic location eliminates chlorine damage to the machine.




Built-in "Poly Pro"™ scrap accumulator.





Chemical Sanitizing Single Rack Dishwasher

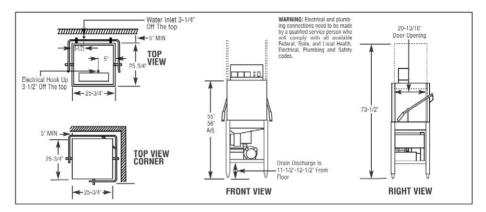

Specifications:

MODEL EVA	USA	METRIC		USA	METRIC
WATER CONSUMPTION			FRAME DIMENSIONS		
PER RACK	1.25 GAL.	(4.73 L)	DEPTH	25-3/4"	(65.4cm)
PER HOUR	46.2 GPH	(174.8 L)	WIDTH	25-3/4"	(65.4cm)
WATER INLET	1/2"		HEIGHT	55"-56"	(140cm)
DRAIN	2*		STANDARD TABLE HEIGHT	34"	(86cm)
OPERATING CYCLE			MAXIMUM CLEARANCE HEIGHT		
WASH TIME - SEC.	53	53	FOR DISHES	17"	(43.2cm)
RINSE TIME - SEC.	30	30	STANDARD DISHRACK	1	1
DWELL	7	7	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
TOTAL CYCLE	90	90	WASH PUMP MOTOR HP	4	4
OPERATING CAPACITY				The state of the s	
RACKS PER HOUR	40	40	ELECTRICAL RATING	VOLTS	AMPS
WASH TANK CAPACITY	1.25 GAL.	(4.73 L)		115	16
PUMP CAPACITY	52 GPM	(197 LPM)			
OPERATING TEMPERATURE			SHIPPING WEIGHT		
REQUIRED	120°F	(49°C)	APPROXIMATE	273#	(124 kg)
RECOMMENDED	140°F	(60°C)			

Summary Specifications: Model EVA

The Energy Mizer model EVA low temperature, chemical sanitizing commercial dishwasher meets NSF, UL and CSA sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. Model EVA is constructed entirely of 304 stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 20" x 20" racks. Unit comes standard with upper and lower stainless steel wash arms.

Available Models

- EVA AH Straight
- EVA C Corner

Available Options

- Sanitizer Alarm
- Alternative cycle times
- Stainless Steel Dishtables

Printed in the U.S.A. © 2006 CMA, Inc.