




STAINLESS STEEL & ALUMINUM  
**KD WALL SHELVES**

Item #: \_\_\_\_\_ Qty #: \_\_\_\_\_

Model #: \_\_\_\_\_

Project #: \_\_\_\_\_



Brackets Easily Snaps  
In On Both Ends

Brackets Are  
In A Fixed Position

**FEATURES:**

Furnished with a 1-5/8" Bullnose edge with a 1-1/4" turn-up edge on sides and rear.  
Unit is easily assembled employing the slip-fit TAB-LOK design.

**CONSTRUCTION:**

Shelf and brackets are die stamped and die formed.

**MATERIAL:**

**WS-KD Series** - 18 gauge stainless steel polished to a satin finish.  
430 type stainless steel.

**AWS-KD Series** - Heavy gauge aluminum.


**SHELF WITH SNAP-IN END BRACKETS**

S/S	ALUMINUM	Width	Length	Wt.	Cu.
WS-KD-24	AWS-KD-24	11 1/8"	24"	10 lbs.	1
WS-KD-36	AWS-KD-36	11 1/8"	36"	12 lbs.	1
WS-KD-48	AWS-KD-48	11 1/8"	48"	14 lbs.	1
WS-KD-60	AWS-KD-60	11 1/8"	60"	17 lbs.	1
WS-KD-72	AWS-KD-72	11 1/8"	60"	17 lbs.	1

**DETAILS and SPECIFICATIONS**

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

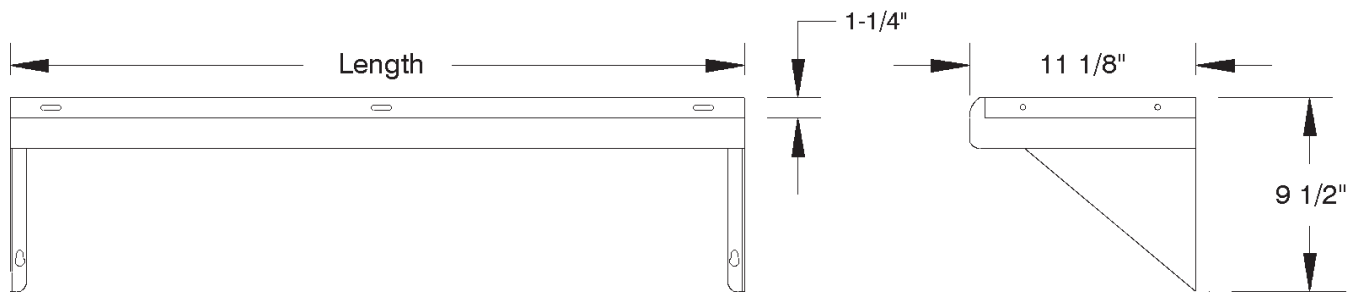

**Requirements for NSF Installations**



1. Install at least 60" above floor.
2. Limit to dry storage.
3. Avoid contact with liquids.
4. For "Ganging-Up" installation, allow at least 2" between units or mount units side by side and seal joints with an approved sealant.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933