





MEDIUM TEMPERATURE OPEN FRONT FRONT LOAD

MODELS

KGH - OF - (30,40,50,60,80,100) - S KGH - OF - (30,40,50,60,80,100) - R




PULL OUT CONDENSING UNIT



PULL OUT EVAP PAN FOR EASY CLEANING ON SELF CONTAINED



PULL DOWN NIGHT CURTAIN

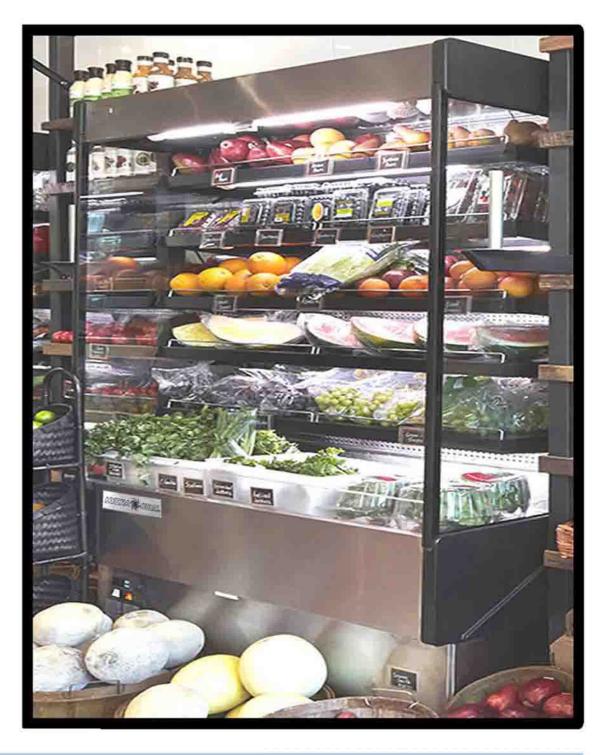





REMOTE AND SELF CONTAINED
404A REF - FORCED AIR REFRIGERATION





Tel.: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832


sales@mvpgroupcorp.com www.mvpgroupcorp.com



	O.A ELECTRICAL											
		LENGTH	CASE		COMP	RESSOR		LIGHTS	EVAP	TOTAL	AMPS	WEIGHT
۵		INCHES	TEMP	115 VOLTS		230 VOLTS		AND FANS	PAN	115	230	
SELF CONTAINED				F.L.A.	L.R.A.	F.L.A.	L.R.A.	115 VOLTS		VOLTS	VOLTS	
	KGH-OF-30-S	29-1/8	36/41 F	10.9	55		_	1.8	6.7	19.4		408
	KGH-OF-40-S	41	36/41 F	16.4	86		_	3.1	8.3	27.8		463
	KGH-OF-50-S	50-1/8	36/41 F	16.4	86	_		3.5	8.3	28.2		514
	KGH-OF-60-S	60-5/8	36/41 F		_	9.2	51	3.6	8.3	12.0	9.2	580
	KGH-OF-80-S	78-1/8	36/41 F			(2) 8.2	(2) 43	4.0	8.3	12.3	16.4	752
	KGH-OF-100-S	96-5/8	36/41 F	_		(2) 8.2	(2) 43	4.9	8.3	13.2	16.4	939

		O.A		115		
		LENGTH	CASE	VOLTS		
	MODEL	INCHES	TEMP	TOTAL	B.T.U.	WEIGHT
ui.				AMPS		
REMOTE	KGH-OF-30-R	29-1/8	36/41 F	1.1	3756	342
S	KGH-OF-40-R	41	36/41 F	1.4	5286	353
~	KGH-OF-50-R	50-1/8	36/41 F	1.8	6463	403
	KGH-OF-60-R	60-5/8	36/41 F	2.0	7817	463
	KGH-OF-80-R	78-1/8	36/41 F	2.5	10073	562
	KGH-OF-100-R	96-5/8	36/41 F	3.8	12459	697

THESE CASES ARE DESIGNED TO OPERATE USING R404A REFRIGERANT B.T.U.'S CALCULATED AT+14° F EVAP AND 90° F AMBIENT CASES ENGINEERED TO OPERATE AT 75°F AND 55% RH THE O.A. DIMENSION INCLUDES (2) 1-7/8" ENDS

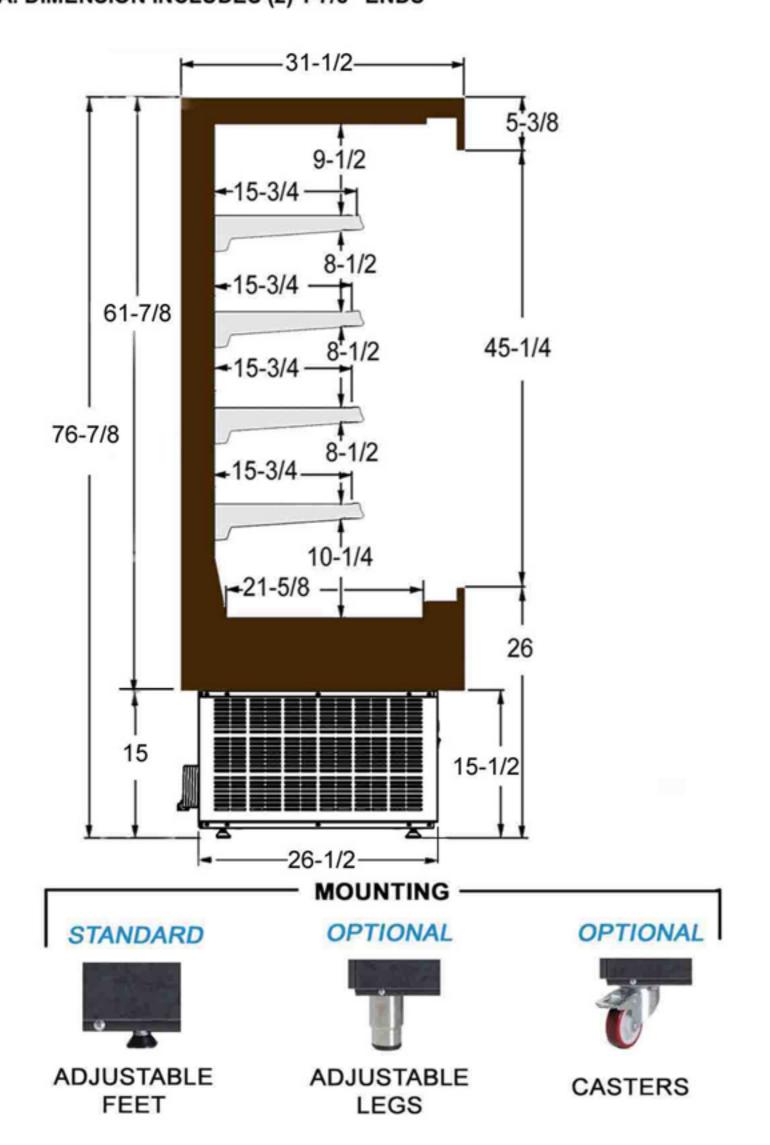

STANDARD FEATURES

- INSULATION INJECTED FOAM
- INTERIOR PVC COATED STEEL-GRAY
- **EXTERIOR PVC COATED STEEL-SILVER**
- ENDS-FOAMED -BLACK POLYSTYRENE
- **PULL DOWN NIGHT CURTAIN**
- CORD AND PLUG ON 20 AMP OR LESS
- CASES ARE MULTIPLEXIBLE
- LED LIGHTING IN CANOPY AND UNDER ALL SHELVES
- PRODUCT STOPS ON ALL SHELVES
- DEFROST AND TEMPERATURE REGULATED BY A DIGITAL CONTROLLER
- ADJUSTABLE SHELVES
- ADJUSTABLE FEET
- ETL LISTED TO UL471 AND SANITATION CLASSIFIED TO NSF7
- **EVAPORATIVE DRAIN PAN ON S/C**

OPTIONAL FEATURES

- CASTERS ADD 4-3/8" TO HEIGHT
- ADJUSTABLE STAINLESS STEEL LEGS-FROM 5-1/8" TO 7-5/8"
- IF THERE IS NO FLOOR DRAIN AN **EVAP PAN MUST BE ORDERED** ADD 8.3 AMPS TO 115V. - ON REMOTE
- OTHER COLORS AVAILABLE
- STAINLESS STEEL EXTERIOR
- STAINLESS STEEL INTERIOR
- ADDITIONAL SHELVES
- NIGHT LOCKING SECURITY COVER
- PRICE TAG MOULDING
- **FULL GLASS OR SOLID ENDS**

WARRANTY

ONE YEAR PARTS AND LABOR WITH FOUR ADDITIONAL YEARS COMPRESSOR (PARTS ONLY)