



**PULL DOWN  
NIGHT SHADE**



**DIGITAL CONTROLLER  
WITH HIGH SIDE ALARM**

## **GRAB-N-GO CASES**

**MEDIUM TEMPERATURE  
HIGH OPEN FRONT  
FRONT LOADING**

## **MODELS**

**KGH- OF - ( 30,40,50,60,80,100 ) R**



Intertek



Intertek

**REMOTE  
404A REF - FORCED AIR REFRIGERATION**

**DOE  
ENERGY  
COMPLIANT**




Tel.: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com www.mvpgroupcorp.com

REMOTE	MODEL	O.A LENGTH INCHES	CASE TEMP	115 VOLTS TOTAL AMPS	B.T.U.	WEIGHT
	KGH-OF-30-R	29-1/8	39/41 F	1.1	3756	324
	KGH-OF-40-R	41	39/41 F	1.4	5286	447
	KGH-OF-50-R	50-1/8	39/41 F	1.8	6463	474
	KGH-OF-60-R	60-5/8	39/41 F	2.0	7817	540
	KGH-OF-80-R	78-1/8	39/41 F	2.5	10073	712
	KGH-OF-100-R	96-5/8	39/41 F	3.8	12459	888

THESE CASES ARE DESIGNED TO OPERATE USING R404A REFRIGERANT

B.T.U.'S CALCULATED AT +10° F EVAP AND 90° F AMBIENT

CASES ENGINEERED TO OPERATE AT 75° F AND 55% RH

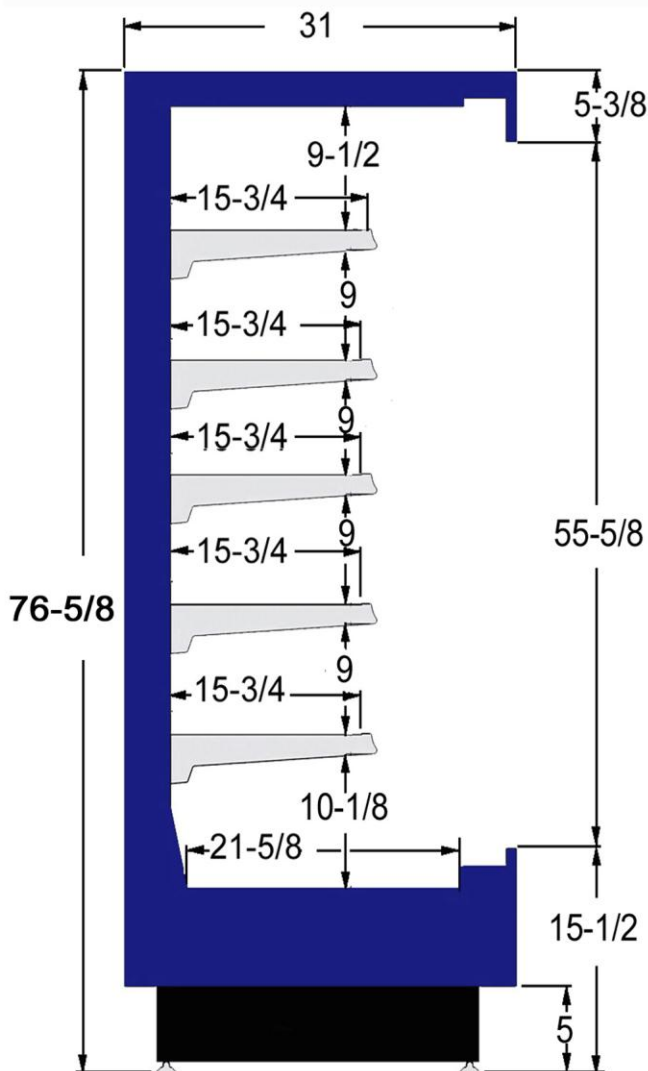

## STANDARD FEATURES

INSULATION - HIGH DENSITY CFC FREE  
POLYURETHANE FOAM

- INTERIOR - PVC COATED STEEL-GRAY
- EXTERIOR - PVC COATED STEEL-SILVER
- ENDS-FOAMED WITH BLACK PVC COATED STEEL
- PULL DOWN NIGHT CURTAIN
- CORD AND PLUG
- CASES ARE MULTIPLEXIBLE
- LED LIGHTING IN CANOPY AND UNDER ALL SHELVES
- HIGH PRESSURE SAFETY ALARM
- DEFROST AND TEMPERATURE REGULATED BY A DIGITAL CONTROLLER
- ADJUSTABLE SHELVES
- ADJUSTABLE FEET
- ETL LISTED TO UL471 AND SANITATION CLASSIFIED TO NSF7

## OPTIONAL FEATURES

- CASTERS - ADD 4-3/8" TO HEIGHT
- ADJUSTABLE STAINLESS STEEL LEGS- FROM 5-1/8" TO 7-5/8"
- IF THERE IS NO FLOOR DRAIN AN EVAP PAN MUST BE ORDERED - ADD 8.3 AMPS TO 115V.
- OTHER COLORS AVAILABLE
- EVAPORATIVE DRAIN PAN
- STAINLESS STEEL EXTERIOR
- STAINLESS STEEL INTERIOR
- ADDITIONAL SHELVES
- NIGHT LOCKING SECURITY COVER
- PRICE TAG MOULDING

## WARRANTY

ONE YEAR PARTS AND LABOR WITH FOUR  
ADDITIONAL YEARS COMPRESSOR ( PARTS ONLY)

